

Fixture Type:

Project Name:

Location:



Date:

Features

- Polycarbonate front provide vandal resistance
- UV stabilized lens
- Rugged die cast aluminum housing with standard dark bronze powder coat finish
- Direct wall mount
- Photocell pre-installed



Dimension

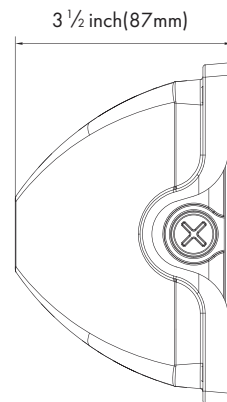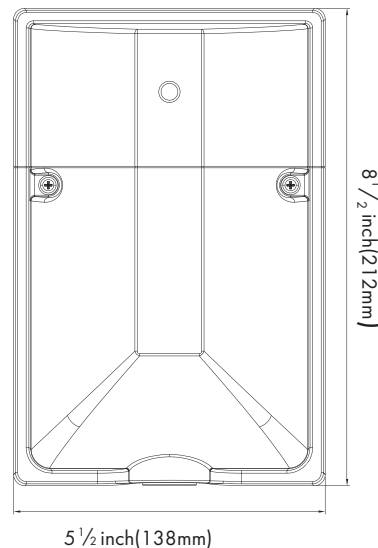

Product Performance Standard

Size	8 1/2" L X 5 1/2" W X 3 1/2" H	Power Factor	≥90%
Weight	2 lb	LED Lifespan	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	4000K-5000K	Photocell	Yes
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~40C° (104°F)

Ordering Guide

Example: LEDWM 25W 40K PC

Fixture Type

Wattage

Color Temp.

Voltage

Finish

Optional Accessories

LEDWM

25W

40K=4000K
50K=5000K

Blank = 120-277V

Blank = Dark Bronzed
BK = Black
WH = White

PC = Photocell
(-WPPC)



WM Series LED Wall Mount

Fixture Type:

Project Name:

Location:

Date:

Product Information

4000K			5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
25W	2500lm	100lm/W	2600lm	103lm/W

Optional Accessories



Internal Photocell

- SKU: WPPC
- Internal photocell included

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories





WM Series LED Wall Mount

Fixture Type:

Project Name:



Location:

Date:

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

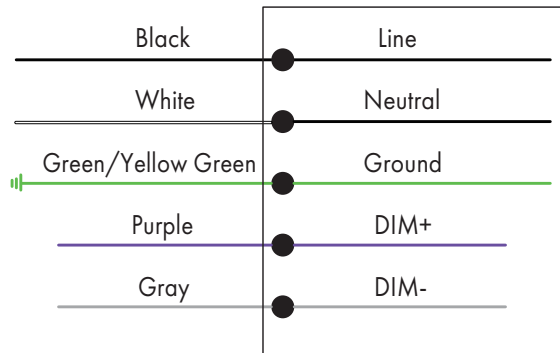

Scan the QR code or visit
www.lironlighting.com/products/ledwm
for the complete luminaire installation guide.

Note:

