Liron

LWP Series Large Standard Wall Pack

Features


- Rugged die cast aluminum housing and seals to housing gasket with stainless steel screws
- Dark bronze powder coat finish
- Polycarbonate optical lens with UV stabilizer
- 1/2 inch threaded hole for easier wire connections
- J box or surface mounting
- Compatible with photocell and emergency battery



Product Performance Standard

Size	18″L*84/5″W*94/5″H	Power Factor	≥90%
Weight	9 lb	LED lifespan	50,000 Hrs
IPRATE	IP65	Dimmable	Non Dimmable
Color Temp	4000K-5000K	Photocell	YES
CRI	70	Warranty	5 Years
Input Voltage 120-277V / 347-480V		Ambient Operation Temperature	-40C° (-40°F) 40C °(104°F)

Ordering Guide Example: LEDLPWP 135W 50K

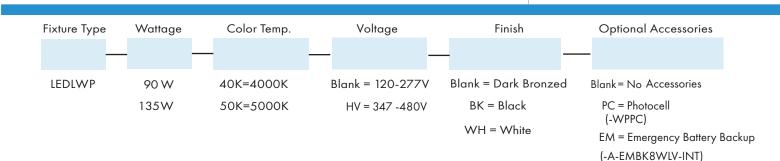

Note: The emergency battery backup only compatible with 90W


Fixture Type:


Project Name:


Location:

Date:

Dimension







LEDLWP Rev 4-15-2021 PAGE 1 of 3





LWP Series Large Standard Wall Pack

Fixture Type:

Project Name:

Location:

Date:

Product Information

	4000K		5000K		
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	
90W	10900lm	121lm/W	11200lm	124lm/W	
135W	15600lm	116lm/W	16400lm	121lm/W	

Optional Accessories

	Internal Photocell		
	-SKU: WPPC -Internal photocell is field installed or pre-installed by request		
	Internal Emergency Battery Backup		
The second	-SKU: A-EMBK8WLV-INT -Internal battery backup is field installed or pre-installed by request -Delivery 900 lumen for 90min emergency operation Only compatible for 90W		

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories





LWP Series Large Standard Wall Pack

Wiring Diagram

CORD/ SUPPLY WIRING

luminaire



Fixture Type:

Project Name:

Location:

Date:



Scan the QR code or visit www.lironlighting.com/products/ledlwp for the complete luminaire installation guide.

Note:



