

Fixture Type:

Project Name:

Location:



Date:

Features

- Extra Large LED flood light with 7H*6V or 4H*6V NEMA distributions
- 1-10V dimming driver
- Rugged die-cast aluminum housing
- Vented housing separated LEDs module from driver, maximizing fixture lifespan and performance
- Door frame seals to housing with a continuous extruded silicone gasket
- Slipfitter or trunnion mount option
- Compatible with photocell



Dimension

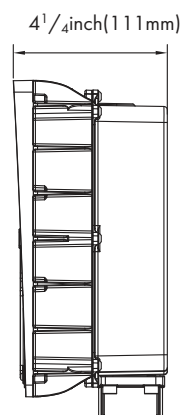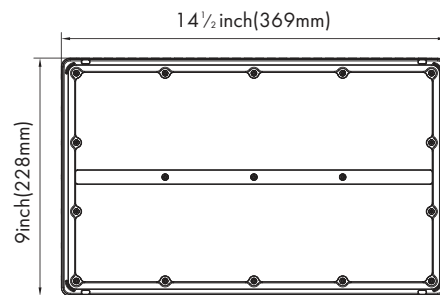

Product Performance Standard

Size	9L" X 14 1/2"W" X 4 1/4"H	Power Factor	≥90%
Weight	14 lb	LED Lifespan	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	4000K-5000K	Photometry	7H*6V / 4H*4V
CRI	70	Warranty	5 Years
Input Voltage	120-277V/347-480V	Ambient Operation Temperature	-40C° (-40°F) ~40C° (104°F)

Ordering Guide

Example: LEDXLFL 135W 40K

Fixture Type	Wattage	Color Temp.	Voltage	Finish	Mounting	NEMA	Optional Accessories
LEDXLFL	135W	40K=4000K	Blank = 120-277V	Blank = Dark Bronzed	TM = Trunnion	4H*4V	Blank = No Accessories
	200W	50K=5000K	HV = 347 -480V	BK = Black	SP = Slipfitter	7H*6V	PC = Photocell (-WPPC)
				WH = White			

Fixture Type:

Project Name:

Location:

Date:

Product Information

4000K			5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
135W	17500lm	130lm/W	17600lm	130lm/W
200W	24600lm	128lm/W	24800lm	128lm/W

Optional Accessories



Internal Photocell

-SKU: WPPC

-Internal photocell is field installed or pre-installed by request.


For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories

Mounting Options




Slipfiter Mount

-SKU: SP

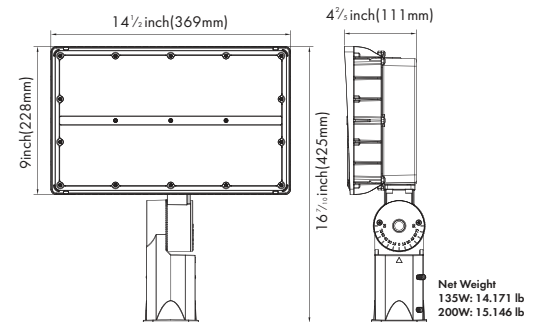

Trunnion Mount

-SKU: TM

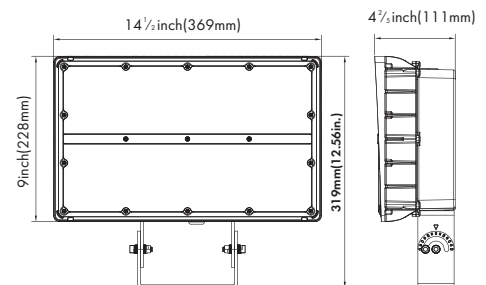

Fixture Type:

Project Name:


Location:

Date:

Wiring Diagram

CORD/ SUPPLY WIRING

LUMINAIRE

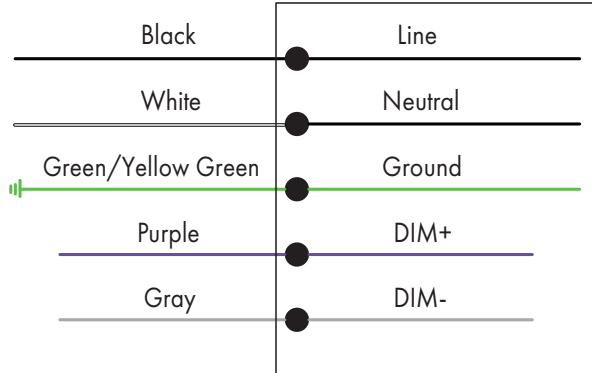

Scan the QR code or visit
www.lironlighting.com/products/ledxlfl
 for the complete luminaire installation guide.

Note:
