

ALB Architectural Linear Series

1.8" Linear Surface Mount Direct Linear Run

Fixture Type:


Project Name:

Location:


Date:

Features

- 1.8" wide achitectural linear luminaries is available in 4ft and 8ft.
- Simply provide wide, powerful lighting to any atmosphere with continuous runs.
- Extruded aluminum housing with preminum powder coat white or black finish.
- 100% direct downlight, allowing for wider spacing between fixtures and better ceiling light uniformity.
- Color temperature adjustable 3000K/3500K /4000K.
- Wattage selectable 4ft 20W/30W/40W ,8ft 40W/60W/80W.
- Optical diffuser lens
- Various mounting option included suspended mount and surface mount.
- Optional emergency battery backup is available.

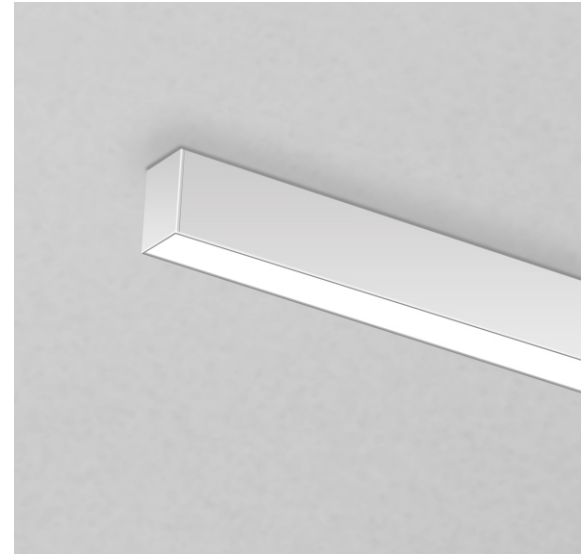

Dimensions

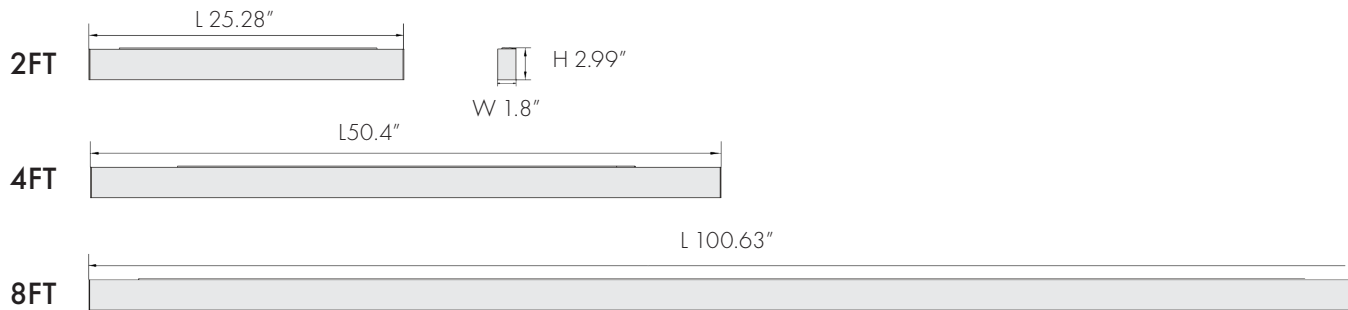

Specification

Material	Extruded aluminum housing	Efficacy	117lm/W
Lens	Diffuser	LED Life Span	50,000 hrs
Beam angle	110 degree	Dimmable	0-10V Dimming
Color Temp	3CCT 3000K/3500K/4000K	Lumen Package	4,680 lm to 9,760lm
CRI	90	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-20°C(-4°F) to 40°C (104°F)
Installation	Surface mount	Listing	UL Listed



ALB Architectural Linear Series

1.8" Linear Surface Mount Direct Linear Run

Fixture Type:

Project Name:

Location:

Date:

Ordering Guide

Example: ALB-UW3CCT-WH-4

Fixture Type	Wattage	CCT	Finish	Linear Feet
ALB	UW =Wattage Selectable	3CCT =30/35/40K	WH = White BK = Black	Nominal linear feet = in increments of 4' fixture lengths come in 4'/8'

Optional Accessories

Emergency Battery Backup

EM
(SKU:EMBK8WH-A-EXT02)
=8W Emergency battery backup

Diffuser Lens Roll

LR42
(SKU:ALA-LR42)
=42' LENS ROLL

Surface Mounting Kit

Individual Run Surface Mount:

Example: AL-SM-KIT

AL-SM-KIT
=Surface Mount Kit
for 4ft & 8f

Notes:
Surface mounts kit will consist of:
1 pc - Square plate compatible for 4" round/square/rectangle Jbox.
1 pc - Quick connect power cable.

Continued Run Surface Mount:

Example: AL-SM-KIT,ALB-FC

AL-SM-KIT
=Surface Mount Kit
for 4ft & 8f

Linear Run connector

ALB-FC = Inline connector

ALB Architectural Linear Series

1.8" Linear Surface Mount Direct Linear Run

Fixture Type:
Project Name:
Location:
Date:

Performance Data:

Performance Data:

Lens	Diffuser	
Lengths	4 FT	8 FT
Wattage	20W/30W/40W- Wattage Switchable	40W/60W/80W- Wattage Switchable
Efficacy	100 lm /W	100 lm /W
Beam Angle	100 degree angle	100 degree angle

Mounting Kit:



ALB Architectural Linear Series

1.8" Linear Surface Mount Direct Linear Run


Fixture Type:

Project Name:

Location:


Date:

Line Connection:




Linear Connector
(-ALB-FC)

120Vac: Connections up to 40ft
277Vac: Connections up to 100ft

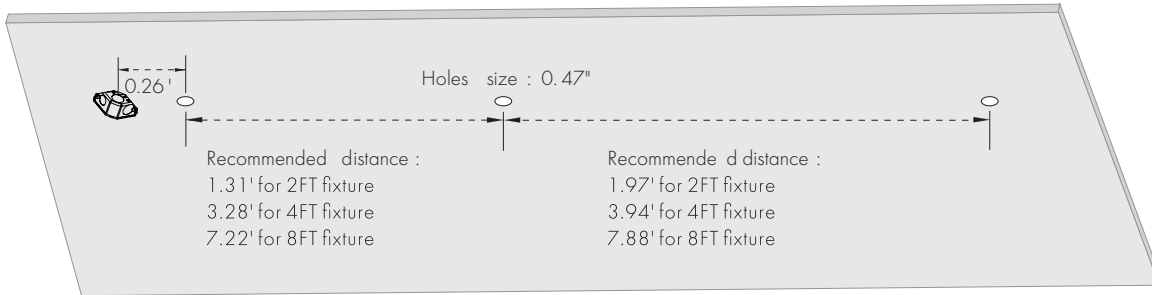

Optional Accessories

Emergency Battery Backup:

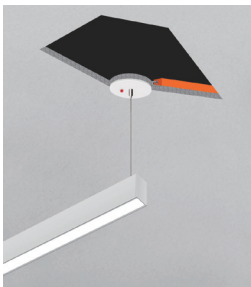

8W Emergency Battery Backup

SKU: EMBK8WH-A-EXT02

- Field install only .
- 8W emergency battery provided up to 680 lumen during the emergency mode.