


Features

- Use in damp and dry environment
- For use on a wide ranges of LED fittings to convert them from standard to emergency fitting
- Additional relay that can control standard LED driver
- Deep discharge protection
- Connector between emergency kit and battery has the function of polarity reversal protection
- Used with LiFePO4 battery suits for LED fitting with external led driver




Dimension

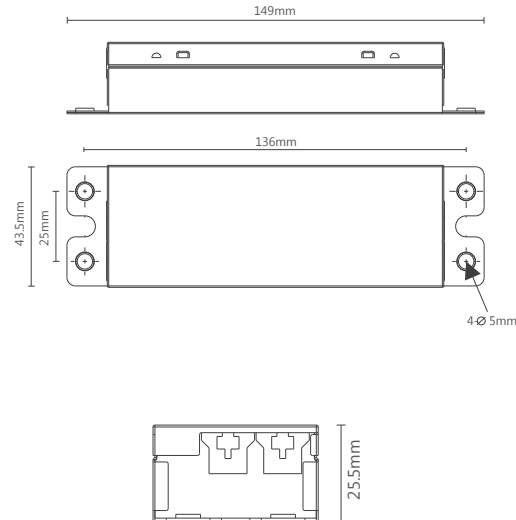

Product Performance Standard

SKU	S-EMBK16WLV-INT	Recharge Time	12 Hours
Voltage	100-277VAC	Discharge Time	90 Minutes
Battery Pack capacity	LifePO4 9.6V 1500mAh	Lumen Factor	100lm/W
Output Power	16W	Min Ambient Range	10 C°
Output Current	60mA	Max Ambient Range	50 C°

Wiring Diagram

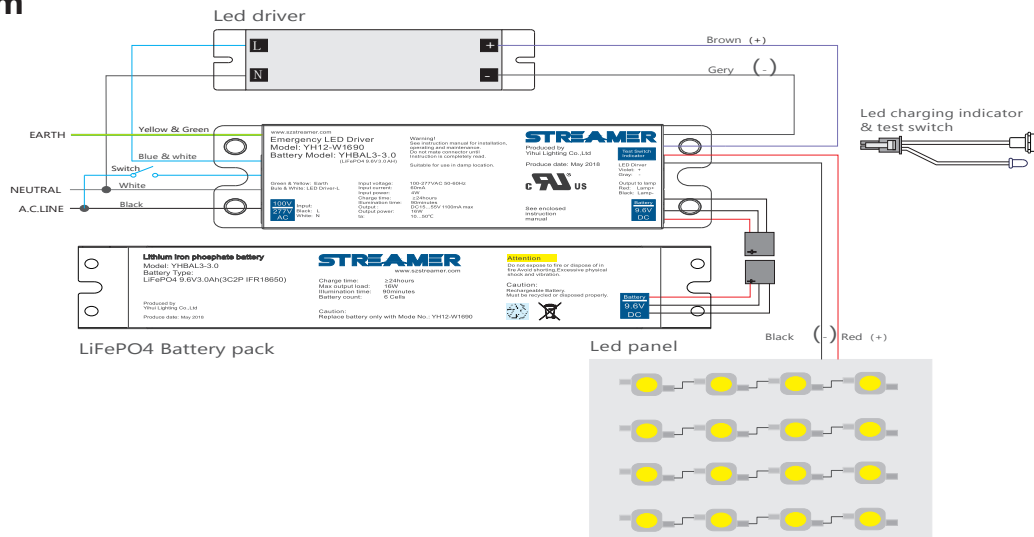

* Note:
Input voltage for panel DC15-55V
Input current for panel <2.5A

Last Rev 8/5/2021