

# C40 Series

## 15INCH/20INCH FLUSH MOUNT DOWNLIGHT

<b>Fixture Type:</b>
<b>Project Name</b>
<b>Location:</b>
<b>Date:</b>


### Features:

- 15Inch/20Inch low profile design LED flush downlight, only 0.95 inch thickness.
- Easily mounted onto a 3.5in. or 4in. hole for standard junction box.
- Aluminum housing with acrylic diffuser provides even light distribution.
- Edgelit technology for even, no-glare light distribution.
- Wattage selectable  
15Inch - 18W/24W/30W  
20Inch - 24W/30W/36W
- Color selectable from 2700K/3000K/3500K/4000K/5000K.
- Finish color black or white available.
- ETL listed for use in damp location.



### Product Performance Standard

<b>Dimension</b>	15 INCH/20INCH	<b>Power Factor</b>	≥90%
<b>Weight</b>	2 lb	<b>LED Lifespan</b>	50,000 Hrs
<b>CRI</b>	80	<b>Dimmable</b>	TRIAC diming
<b>Color Temp</b>	5CCT	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120V	<b>Ambient Operation Temperature</b>	-20°C (-4°F) 40°C(104°F)

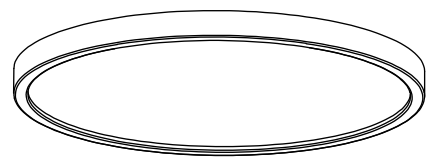

0.95 Inch thickness

### Ordering Guide Example: C40-15-4-4

Part Number	Size & Wattage	CCT	Finish
C40	15 =15INCH Wattage Selectable 18W/24W/30W	4 = 5CCT 27/30/35/40/50K	3 = White 4 =Black
	20 =20INCH Wattage Selectable 24W/30W/36W		

# C40 Series

## 15INCH/20INCH FLUSH MOUNT DOWNLIGHT

<b>Fixture Type:</b>
<b>Project Name:</b>
<b>Location:</b>
<b>Date:</b>

### Product Information

15 Inch		5000K
WATTAGE	LUMEN	EFFICACY
30W	1700lm	60lm/W
24W	1440lm	60lm/W
18W	1080lm	60lm/W

20 Inch		5000K
WATTAGE	LUMEN	EFFICACY
36W	2160lm	60lm/W
30W	1700lm	60lm/W
24W	1440lm	60lm/W