

# ALA2 Architectural Linear Series

Linear Run Surface Mount

**Fixture Type:**





**Project Name:**

**Location:**

**Date:**

## Features

- 1.3" wide architectural linear luminaries is available in 2ft,4ft and 8ft.
- Simply provide wide, powerful lighting to any atmosphere with continuous runs.
- Extruded aluminum housing with premium powder coat white or black finish.
- 100% direct downlight or 25% up and 75% down by dip switch, allowing for wider spacing between fixtures and better ceiling light uniformity.
- 3 CCT color temperature adjustable 3000K/3500K/4000K.
- Wattage selectable 2' 20W/15W/10W, 4' 40W/30W/20W, 8' 80W/60W/40W
- 3 different Lens options diffuser lens (standard), louver and drop lens.
- Various mounting option suspended mount, wall mount and surface mount.
- Optional emergency battery backup is available.

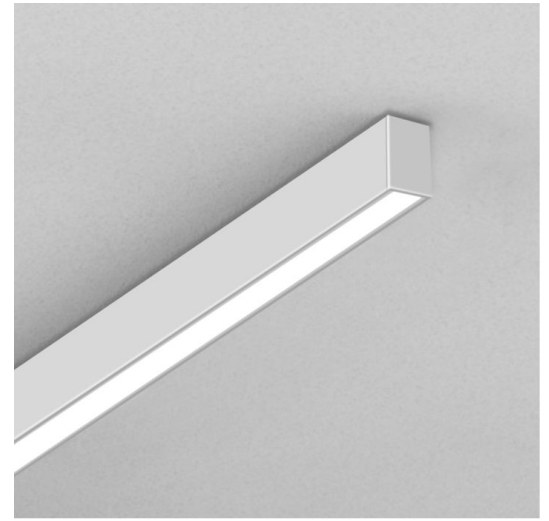


Diffuser Lens (Standard)

Louver (Optional)

Drop Lens (Optional)

## Dimensions

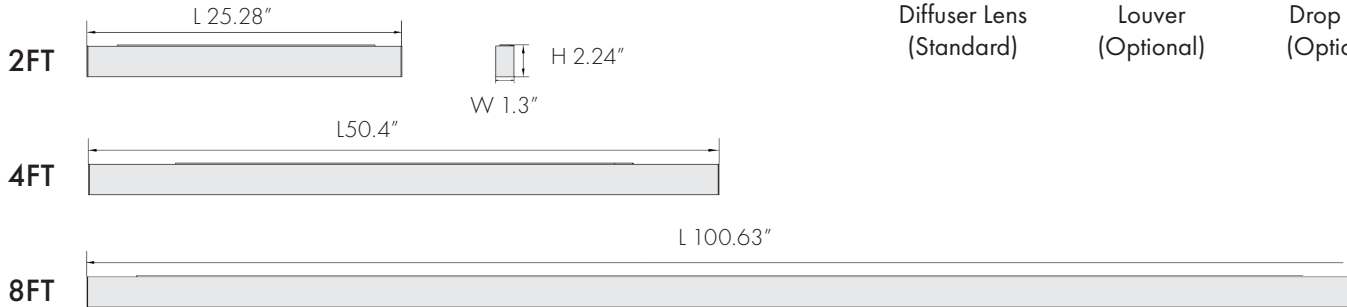

## Specification

<b>Material</b>	Extruded aluminum housing	<b>Efficacy</b>	800lm/ft
<b>Lens</b>	Diffuser/louver/drop lens	<b>LED Life Span</b>	50,000 hrs
<b>Beam angle</b>	110 degree	<b>Dimmable</b>	0-10V Dimming
<b>Color Temp</b>	3CCT 3500/4000K/5000K	<b>Lumen Package</b>	1,600 lm - 6,400 lm
<b>CRI</b>	90	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120-277V	<b>Ambient Operation Temperature</b>	-20°C(-4°F) to 40°C (104°F)
<b>Installation</b>	Suspended mount, Surface mount, Wall mount	<b>Listing</b>	UL Listed

# ALA2 Architectural Linear Series

Linear Run Surface Mount

**Fixture Type:**


**Project Name:**

**Location:**

**Date:**


## Ordering Guide

Example: ALA2-D-3CCT-WH-4

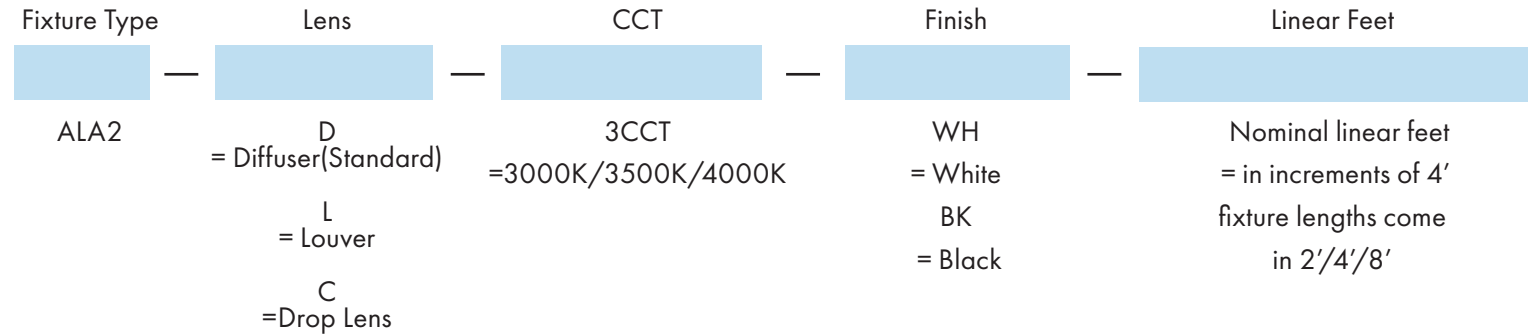


## Optional Accessories

Emergency Battery Backup

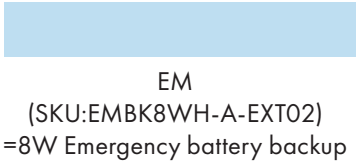


Diffuser Lens Roll

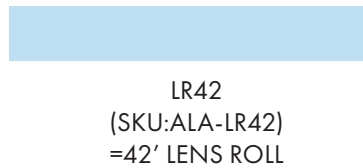

## Surface Mounting Kit

Individual Run Surface Mount:

Example: AL-SM-KIT



AL-SM-KIT

=Surface Mount Kit  
for 2ft,4ft & 8f

Notes:

Surface mounts kit will consist of:

1 pc - Square plate compatible for 4"round/square/rectangle Jbox.  
Screw set and male quick connector included.

Continued Run Surface Mount:


Example: AL-SM-KIT,ALA-FC



AL-SM-KIT

=Surface Mount Kit  
for 2ft,4ft & 8f

Linear Run connector



ALA-FC = Inline connector

# ALA2 Architectural Linear Series

Linear Run Surface Mount

Fixture Type:


Project Name:

Location:

Date:

## Mounting

Surface Mounting Kit:

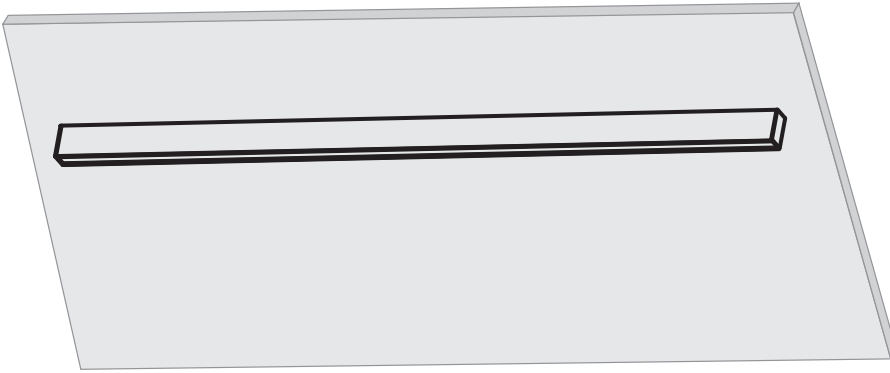

# ALA2 Architectural Linear Series

Linear Run Surface Mount

**Fixture Type:**

**Project Name:**


**Location:**

**Date:**

## Performance Data:


Lens	Length	Wattage Selectable	Lumen Output	3CCT Adjustable
Diffuser	2'	20W/15W/10W	1700lm/1275lm/900lm	3000K/3500K/4000K
	4'	40W/30W/20W	3400lm/2550lm/1700lm	3000K/3500K/4000K
	8'	80W/60W/40W	6800lm/5100lm/3400lm	3000K/3500K/4000K

## Line Connection:



### Linear Connector (-ALA-FC)

120Vac: Connections up to 40ft  
277Vac: Connections up to 100ft

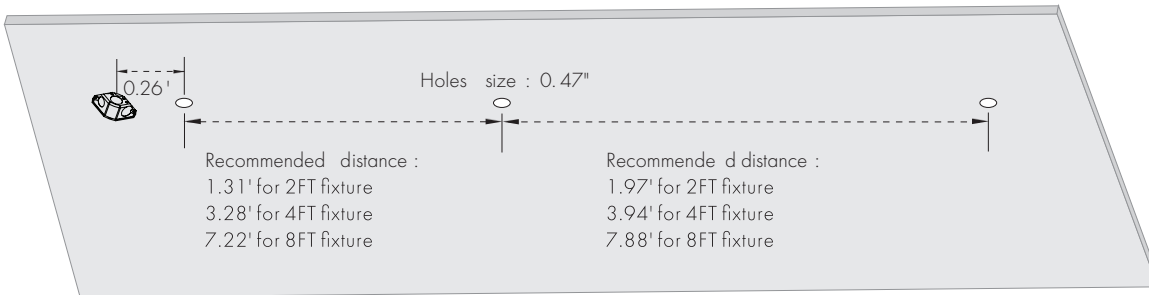

# ALA2 Architectural Linear Series

Linear Run Surface Mount

**Fixture Type:**

**Project Name:**

**Location:**

**Date:**

## Optional Accessories

### Emergency Battery Backup:



#### **8W Emergency Battery Backup**

**SKU: EMBK8WH-A-EXT02**

- Field install only .
- 8W emergency battery provided up to 680 lumen during the emergency mode.