

ALA2 Architectural Linear Series

Linear Run Wall Mount

Fixture Type:




Project Name:

Location:

Date:

Features

- 1.3" wide architectural linear luminaries is available in 2ft,4ft and 8ft.
- Simply provide wide, powerful lighting to any atmosphere with continuous runs.
- Extruded aluminum housing with premium powder coat white or black finish.
- 100% direct downlight or 25% up and 75% down by dip switch, allowing for wider spacing between fixtures and better ceiling light uniformity.
- 3 CCT color temperature adjustable 3000K/3500K/4000K.
- Wattage selectable 2' 20W/15W/10W, 4' 40W/30W/20W, 8' 80W/60W/40W
- 3 different Lens options diffuser lens (standard), louver and drop lens.
- Various mounting option suspended mount, wall mount and surface mount.
- Optional emergency battery backup is available.

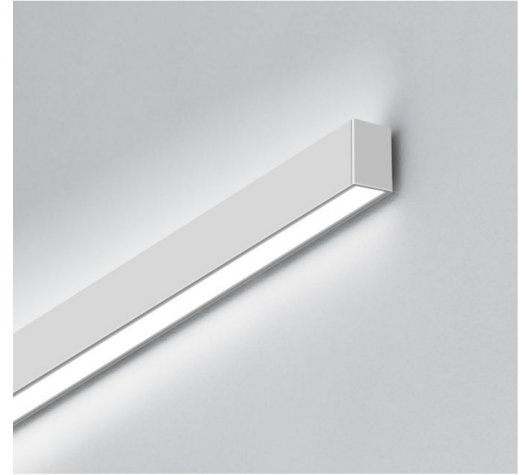


Diffuser Lens (Standard)

Louver (Optional)

Drop Lens (Optional)

Dimensions

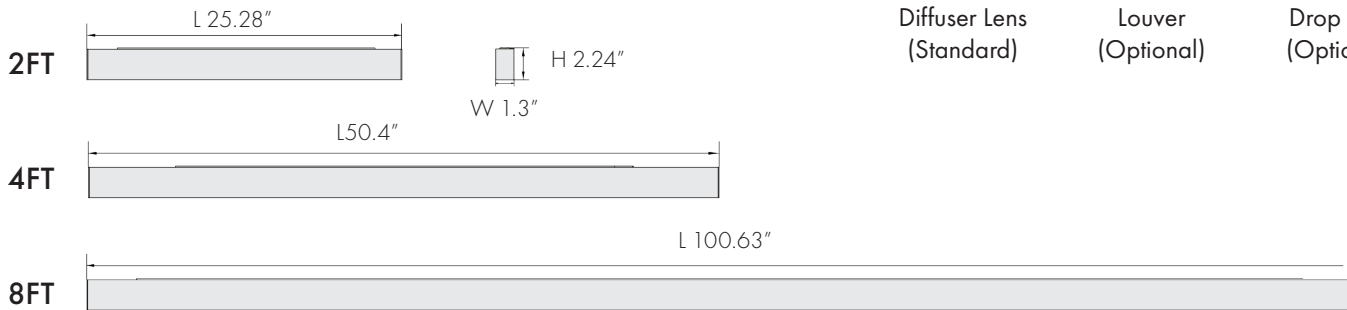

Specification

| | | | |
|----------------------|--|--------------------------------------|-----------------------------|
| Material | Extruded aluminum housing | Efficacy | 800lm/ft |
| Lens | Diffuser/louver/drop lens | LED Life Span | 50,000 hrs |
| Beam angle | 110 degree | Dimmable | 0-10V Dimming |
| Color Temp | 3CCT 3500/4000K/5000K | Lumen Package | 1,600 lm - 6,400 lm |
| CRI | 90 | Warranty | 5 Years |
| Input Voltage | 120-277V | Ambient Operation Temperature | -20°C(-4°F) to 40°C (104°F) |
| Installation | Suspended mount, Surface mount, Wall mount | Listing | UL Listed |

ALA2 Architectural Linear Series

Linear Run Wall Mount

Fixture Type:


Project Name:

Location:

Date:


Ordering Guide

Example: ALA2-D-3CCT-WH-4

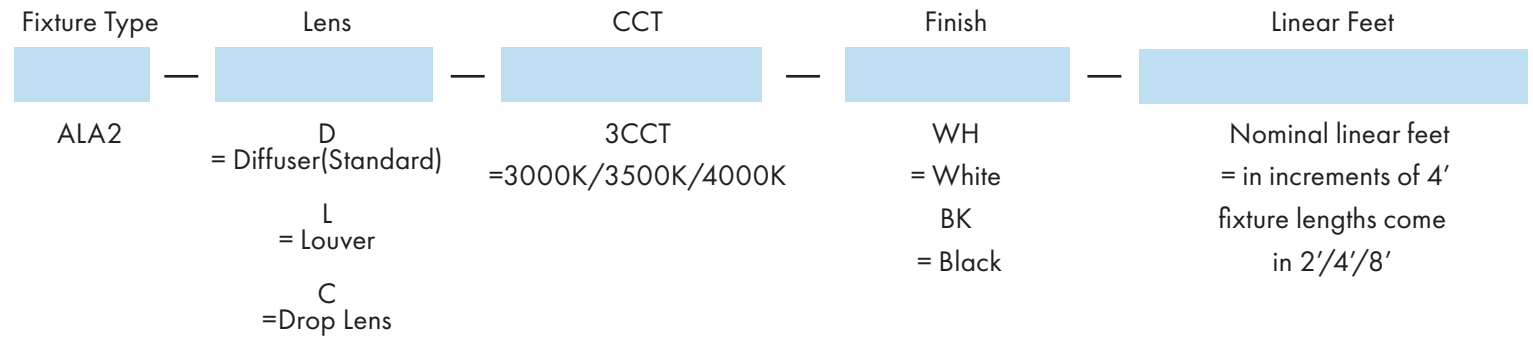

Optional Accessories

Emergency Battery Backup



EM

(SKU:EMBK8WH-A-EXT02)

=8W Emergency battery backup

Diffuser Lens Roll



LR42


(SKU:ALA-LR42)

=42' LENS ROLL

Wall Mounting Kit

Individual Run Wall Mount:

Example: AL-WM-KIT



AL-WM-KIT

=Wall Mount Kit for

2ft,4ft & 8ft

Notes:

Wall mounts kit will consist of:

1 pc - Square plate compatible for 4"round/square/rectangle Jbox.


Scerw set and male quick connector included.

1 pc - Quick connect power cable

1 pc - Wall Mount Bracket

Continued Run Wall Mount:

Example: AL-WM-KIT,ALA-FC



AL-WM-KIT

=Wall Mount Kit for

2ft,4ft & 8ft

Linear Run connector



ALA-FC = Inline connector

ALA2 Architectural Linear Series

Linear Run Wall Mount

Fixture Type:

Project Name:




Location:

Date:

Mounting



Wall Mount Bracket

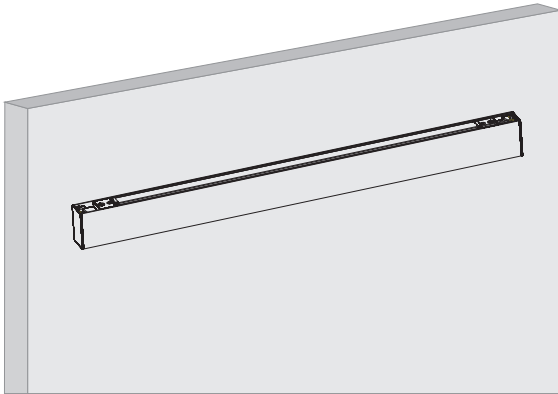

ALA2 Architectural Linear Series


Linear Run Wall Mount

| |
|----------------------|
| Fixture Type: |
| Project Name: |
| Location: |
| Date: |

Performance Data:

| Lens | Length | Wattage Selectable | Lumen Output | 3CCT Adjustable |
|----------|--------|--------------------|----------------------|-------------------|
| Diffuser | 2' | 20W/15W/10W | 1700lm/1275lm/900lm | 3000K/3500K/4000K |
| | 4' | 40W/30W/20W | 3400lm/2550lm/1700lm | 3000K/3500K/4000K |
| | 8' | 80W/60W/40W | 6800lm/5100lm/3400lm | 3000K/3500K/4000K |

Line Connection:



Linear Connector
(-ALA-FC)

120Vac: Connections up to 40ft
277Vac: Connections up to 100ft

ALA2 Architectural Linear Series

Linear Run Wall Mount

Fixture Type:

Project Name:

Location:

Date:

Optional Accessories

Emergency Battery Backup:



8W Emergency Battery Backup

SKU: EMBK8WH-A-EXT02

- Field install only .
- 8W emergency battery provided up to 680 lumen during the emergency mode.