

ALA2 Architectural Linear Series

1.3" Linear Suspended Linear Run Luminaire

Fixture Type:



Project Name:

Location:

Date:

Features

- 1.3" wide architectural linear luminaires is available in 2ft,4ft and 8ft.
- Simply provide wide, powerful lighting to any atmosphere with continuous runs.
- Extruded aluminum housing with premium powder coat white or black finish.
- 100% direct downlight or 25% up and 75% down by dip switch, allowing for wider spacing between fixtures and better ceiling light uniformity.
- 3CCT color temperature adjustable 3000K/3500K/4000K.
- Wattage selectable 2' 20W/15W/10W, 4' 40W/30W/20W, 8' 80W/60W/40W
- 3 different Lens options diffuser lens (standard), louver and drop lens.
- Various mounting option suspended mount, wall mount and surface mount.
- Optional emergency battery backup is available.

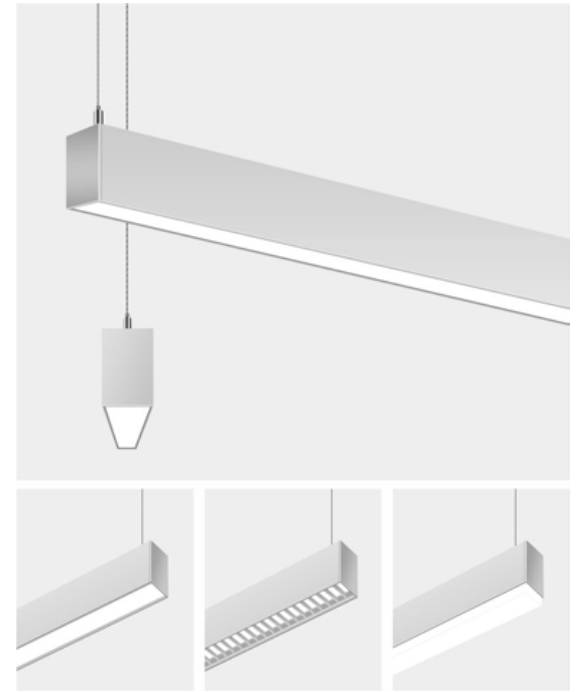


Diffuser Lens (Standard)

Louver (Optional)

Drop Lens (Optional)

Dimensions

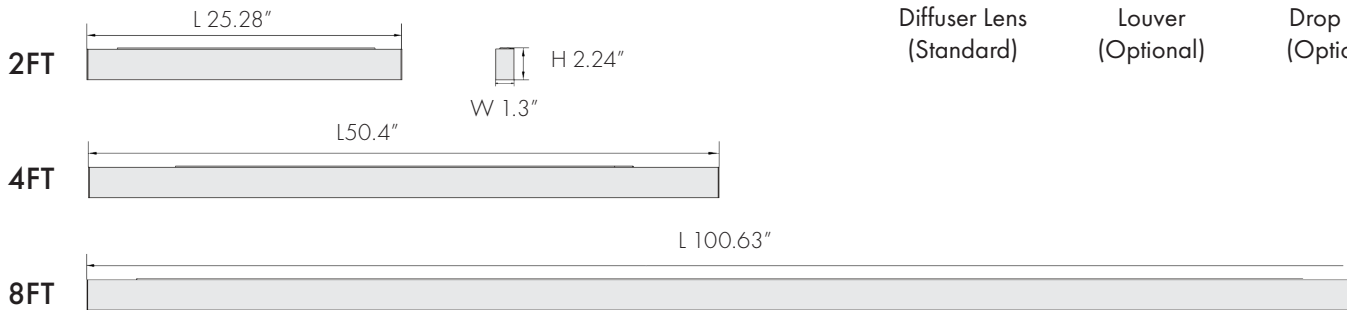

Specification

Material	Extruded aluminum housing	Efficacy	800lm/ft
Lens	Diffuser/louver/drop lens	LED Life Span	50,000 hrs
Beam angle	110 degree	Dimmable	0-10V Dimming
Color Temp	3CCT 3000/3500K/4000K	Lumen Package	1,600 lm - 6,400 lm
CRI	90	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-20°C(-4°F) to 40°C (104°F)
Installation	Suspended mount, Surface mount, Wall mount	Listing	UL Listed

ALA2 Architectural Linear Series

1.3" Linear Suspended Linear Run Luminaire

Fixture Type:

Project Name:

Location:

Date:

Ordering Guide

Example: ALA2-D-3CCT-WH-4

Fixture Type	Lens	CCT	Finish	Linear Feet
ALA2	D = Diffuser(Standard) L = Louver C = Drop Lens	3CCT =3000K/3500K/4000K	WH = White BK = Black	Nominal linear feet = in increments of 4' fixture lengths come in 2'/4'/8'

Optional Accessories

Emergency Battery Backup

Diffuser Lens Roll

EM

(SKU:EMBK8WH-A-EXT02)

=8W Emergency battery backup

LR42

(SKU:ALA-LR42)

=42' LENS ROLL

Mounting Ceiling Type - Dry wall ceiling or Drop ceiling

Dry wall Ceiling Mount Individual Run

Example: AL-PDW-S-BK-kit

AL-PDW	Canopy Shape	Finish
Dry Wall Mounting Kit	R=Round S=Square	WH=Black BK=Black

Notes:

Dry wall ceiling mounts kit will consist of:

1 pc - 4" round or square canopy for power feed side,

1 pc - 4" round or square canopy for non power feed side,

1 pc - 2" round or square canopy for non power feed side,

1 pc - J-box cross bar, 1 pc - 5FT Power feed, 1 set - 5ft aircraft Cable

Dry wall Ceiling Mount Continued Run

Example: AL-PDW-S-BK,AL-NDWCNP-S-BK-2,ALA-FC

AL-PDW	Canopy Shape	Finish
Dry Wall Mounting Kit	R=Round S=Square	WH=White BK=Black

AL-NDWCNP	Canopy Shape	Finish	Canopy Size
Canopy for continued run non-power feed	R=Round S=Square	WH=White BK=Black	2=2inch 4=4inch

Linear Run connector

ALA-FC = Inline connector

Note: Optional 12ft power cable and 12ft aircraft cable available. Both cable can be adjustable the length.

Fixture Type:
Project Name:
Location:
Date:

ALA2 Architectural Linear Series

1.3" Linear Suspended Linear Run Luminaire

Drop Ceiling Mount Individual Run **Example: AL-PTB-R-9-F-WH-KIT**

	Canopy Shape	Grid Size	Grid Type	Finish
AL-PTB				
Drop ceiling mounting kit	R=Round S=Square	9=9/16 15=15/16	F=Flat S=Slot	WH=Blank BK=Black

- Notes:
- Drop ceiling mounts kit will consist of:
 - 1 pc - 4" round or square canopy for power feed side,
 - 1 pc - 4" octogon junction box
 - 1 pc - 4" round or square canopy for non power feed side,
 - 1 pc - 2" round or square canopy for non power feed side,
 - 1 set - T-grid clips for both power feed and non power feed,
 - 1 pc - 5FT Power feed,
 - 1 set - 5ft aircraft Cable.

Note: Optional 12ft power cable and 12ft aircraft cable available. Both cable can be adjustable the length.

Drop Ceiling Mount Continued Run **Example: AL-PTB-R-9-F-WH,AL-NTBCNP-R-9-F-WH-2,ALA-FC**

Power feed	Canopy Shape	Grid Size	Grid Type	Finish
AL-PTB				
Drop ceiling mount	R=Round S=Square	9=9/16 15=15/16	F=Flat S=Slot	WH=Blank BK=Black

Non-Power feed	Canopy Shape	Grid Size	Grid Type	Finish	Canopy Size
AL-NTBCNP					
Drop ceiling mount	R=Round	9=9/16	F=Flat	WH=Blank	4=4inch
Non-Power feed side	S=Square	15=15/16	S=Slot	BK=Black	2=2inch

Linear Run connector



ALA-FC = Inline connector

ALA2 Architectural Linear Series

1.3" Linear Suspended Linear Run Luminaire

Fixture Type:


Project Name:

Location:

Date:

Mounting





Dry Wall Mount



Drop Ceiling / Off Grid

Compatible for various T grid

- 9/16" Flat
- 15/16" Flat
- 9/16" Slot
- 15/16" Slot



Pendant Accessories For Dry Ceiling

Canopy Kits



Pendant Accessories For Drop Ceiling

Canopy Kits




Junction Box



Power Cord Kits




Power Cord Kits

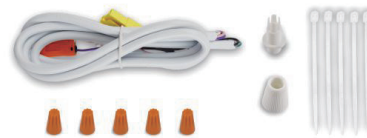

Aircraft Cable Kits



Aircraft Cable Kits



T-grid Clips





ALA2 Architectural Linear Series

1.3" Linear Suspended Linear Run Luminaire

Fixture Type:

Project Name:

Location:

Date:

Performance Data:

Lens	Length	Wattage Selectable	Lumen Output	3CCT Adjustable
Diffuser	2'	20W/15W/10W	1700lm/1275lm/900lm	3000K/3500K/4000K
	4'	40W/30W/20W	3400lm/2550lm/1700lm	3000K/3500K/4000K
	8'	80W/60W/40W	6800lm/5100lm/3400lm	3000K/3500K/4000K

ALA2 Architectural Linear Series

1.3" Linear Suspended Direct Linear Run Luminaire


Fixture Type:

Project Name:

Location:


Date:

Line Connection:




Linear Connector
(-ALA-FC)

120Vac: Connections up to 40ft
277Vac: Connections up to 100ft

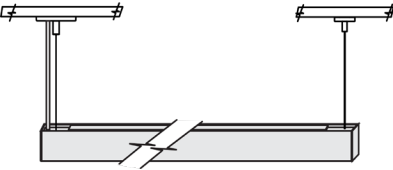

Mounting point:
24.72" for 2FT fixture
49.8" for 4FT fixture
100.08" for 8FT fixture

Continuous Run

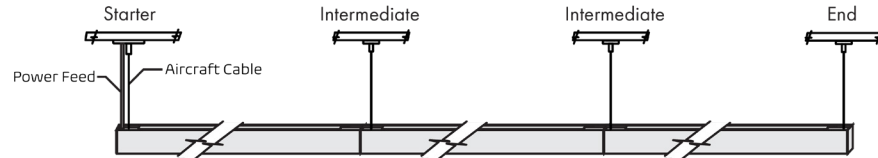

Mounting point:
24.96" for 2FT fixture
50.04" for 4FT fixture
100.2" for 8FT fixture

Mounting point:
25.08" for 2FT fixture
50.28" for 4FT fixture
100.44" for 8FT fixture

Mounting point:
24.96" for 2FT fixture
50.04" for 4FT fixture
100.2" for 8FT fixture

Luminaire Run Length (ft)	Run Configuration	Line Joinder	5' Power Cable	5' Aircraft Cable	Canopy
2	2'	-	1	2	2
4	4'	-	1	2	2
6	4'+2'	1	1	3	3
8	8'	-	1	2	2
10	8'+2'	1	1	3	3
12	8'+4'	1	1	3	3
14	8'+4'+2'	2	1	4	4
16	8'+8'	1	1	3	3
18	8'+8'+2'	2	1	4	4
20	8'+8'+4'	2	1	4	4
22	8'+8'+4'+2'	3	1	5	5
24	8'+8'+8'	2	1	4	4
26	8'+8'+8'+2'	3	1	5	5
28	8'+8'+8'+4'	3	1	5	5
30	8'+8'+8'+4'+2'	4	1	6	6
32	8'+8'+8'+8'	3	1	5	5
34	8'+8'+8'+8'+2'	4	1	6	6
36	8'+8'+8'+8'+4'	4	1	6	6
38	8'+8'+8'+8'+4'+2'	5	1	7	7
40	8'+8'+8'+8'+8'	4	1	6	6
42	8'+8'+8'+8'+8'+2'	5	2	7	7

ALA2 Architectural Linear Series

1.3" Linear Suspended Direct Linear Run Luminaire

Fixture Type:
Project Name:
Location:
Date:

Optional Accessories

Emergency Battery Backup:



8W Emergency Battery Backup

SKU: EMBK8WH-A-EXT02

- Field install only .
- 8W emergency battery provided up to 680 lumen during the emergency mode.