LIRON LIGHTING
YOUR RELIABLE LIGHTING SOURCE

FCWP3L Series

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:

SLIM FULL CUTOFF WALL PACK

10 YEAR | DLC LISTED PREMIUM | TAA COMPLIANT | UL CERTIFIED | CCT Selectable | Wattage Selectable | IP65

EMERGENCY BACKUP LOW TEMPERATURE

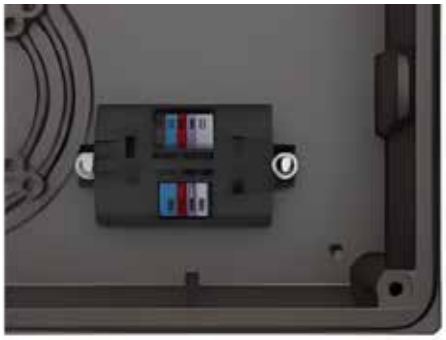

Switch for wattage & 3CCT selectable



Wattage switchable 100W/84W/62W/42W

Dimensions

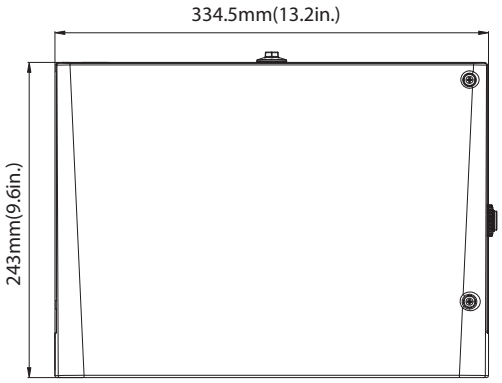

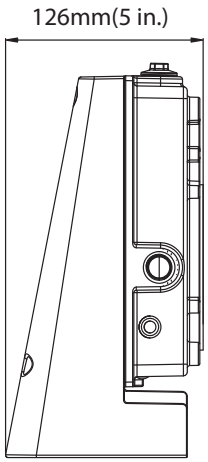

Specification

Size	13.1"x9.6"x5"
Weight	5 lb
IP Rate	IP65
Color Temp	3CCT 3000K/4000K/5000K
CRI	80
Input Voltage	120-277V
Power Factor	90%
LED Lifespan	50,000 Hrs
Dimmable	1-10V Dimmable
Efficacy	Up to 158 lm/W
Warranty	10 Years
Ambient Operation Temperature	-40°C (-40°F)~40°C (104°F)

LIRON LIGHTING
YOUR RELIABLE LIGHTING SOURCE

FCWP3L Series

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:

SLIM FULL CUTOFF WALL PACK

Features

- Sleek, low profile LED full cutoff wall pack
- Rugged die-cast aluminum housing
- Dark bronze powder coat finish with polycarbonate lens
- Wattage selectable from 42W/62W/84W/100W with efficacy of up to 158 lm/W CCT adjustable 3000K/4000K/5000K
- Full cutoff with zero up light and low glare at angles
- Uniform distribution with no visible pixilation
- Easy installation for new construction or retrofit application
- Universal input voltage 120-277V
- Vandal-resistant lens

Ordering Guide Example: FCWP3L-UW3CCT-100W

SKU	Wattage	Color Temp	Wattage Options	[1]Finish	Optional Accessories
FCWP3L	UW = Wattage selectable	3CCT = Color Temp Adjustable (30K/40K/50K)	100W = Maximum Wattage 100W	Standard Finish Blank = Dark Bronze [1]Premium Finish BK = Black WH = White	Blank = No accessories PC = Photocell (-WPPC) EMBKW2-H8W =Low temperature 8W emergency battery backup -4°F - 140°F

Note: 1.Premium finish incurs an additional cost. Contact factory for MOQ and availability.

Product Information

	3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
42W	6400lm	152 lm/W	6500lm	154 lm/W	6667lm	158 lm/W
62W	9300lm	150 lm/W	9400lm	151 lm/W	9548lm	154 lm/W
84W	12500lm	148 lm/W	12600lm	150 lm/W	12725lm	151 lm/W
100W	14300lm	143 lm/W	14400lm	144 lm/W	14500lm	145 lm/W

LIRON LIGHTING
YOUR RELIABLE LIGHTING SOURCE

FCWP3L Series

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:

SLIM FULL CUTOFF WALL PACK

Accessories



Internal Button Photocell

- SKU: WPPC
- Internal Photocell is pre-installed by request



Internal 8W **Low Temperature** Emergency Battery Backup SKU: **EMBKW2-H8W**

- Suitable for low temperature location -4°F - 140°F
- Internal battery backup is pre-install by request
- 90 minutes emergency operation
- Provide up to 1100 lumen during emergency mode

BUG

	B	U	G
3000K	3	0	3
4000K	3	0	3
5000K	3	0	2

www.lironlighting.com sales@lironlighting.com 833-875-4766
2025 Liron Lighting All Rights Reserved