

FCWP3L Series

Slim full cutoff Wall Pack

Fixture Type:

Project Name:

Location:

Date:

Features

- Sleek, low profile LED full cutoff wall pack.
- Rugged die-cast aluminum housing.
- Dark bronze powder coat finish with polycarbonate lens.
- Wattage selectable from 42W/62W/84W/100W with efficacy of up to 158 lm/W.
- CCT adjustable 3000K/4000K/5000K.
- Full cutoff with zero up light and low glare at angles
- Uniform distribution with no visible pixilation.
- Easy installation for new construction or retrofit application.
- Universal input voltage 120-277V.



Wattage switchable
100W/84W/62W/42W





Switch for wattage & 3CCT
selectable



Product Performance Standard


Size	13.1" x 9.6" x 5"	Power Factor	90%
Weight	5lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	3CCT 30/40/50K	Efficacy	Up to 158 lm/W
CRI	80	Warranty	10 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 40° (104°F)

Dimensions

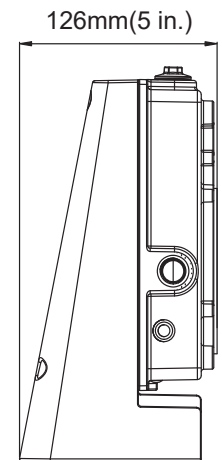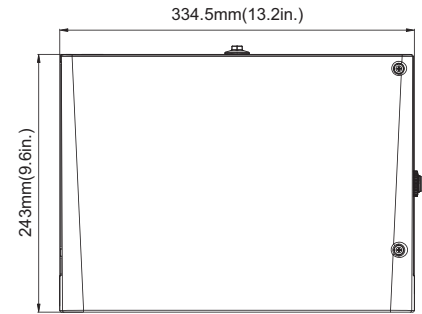

Ordering Guide

Example: FCWP3L-UW3CCT-100W

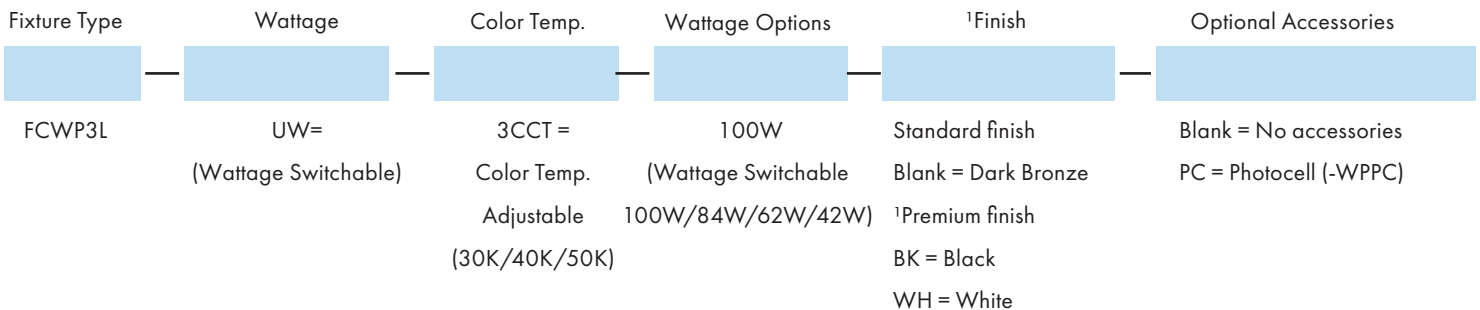

Note: 1.Premium finish incur an additional cost. Contact factory for MOQ and availability.

Updated: 12-5-2022



Fixture Type:

Project Name:

Location:

Date:

Product Information

3000K			4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
100W	14300lm	143lm/W	14400lm	144lm/W	14500lm	145lm/W
84W	12500lm	148lm/W	12600lm	150lm/W	12725lm	151lm/W
62W	9300lm	150lm/W	9400lm	151lm/W	9548lm	154lm/W
42W	6400lm	152lm/W	6500lm	154lm/W	6667lm	158lm/W

Optional Accessories



Internal Button Photocell

- SKU: WPPC
- Internal Photocell is pre-installed by request

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories

