

FCWP3 Series

Slim Full Cutoff Wall Pack

Fixture Type:

Project Name:

Location:

Date:

Features

- Sleek, low profile LED full cutoff wall pack
- Rugged die-cast aluminum housing
- Dark bronze powder coat finish with polycarbonate lens
- Wattage selectable from 16W to 65W with efficacy of up to 158 lm/W
- CCT adjustable 3000K/4000K/5000K
- Full cutoff with zero up light and low glare at angles
- Uniform distribution with no visible pixilation
- Easy installation for new construction or retrofit application
- Universal input voltage 120-277V





Wattage switchable
65W/48W/32W/16W



Switch for wattage & 3CCT selectable

Dimensions

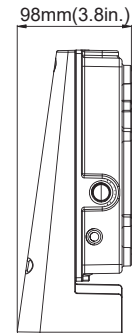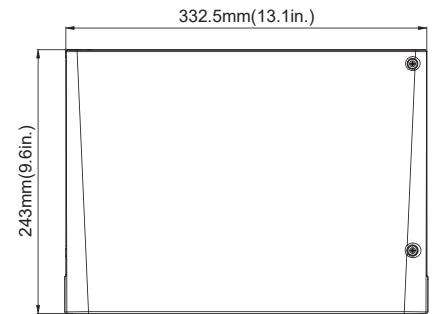


Product Performance Standard

Size	13.1"x9.6"x3.8"	Power Factor	90%
Weight	5lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	3CCT 30/40/50K	Efficacy	Up to 150 lm/W
CRI	80	Warranty	10 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 40° (104°F)

Ordering Guide

Example: FCWP3-UW3CCT-65W

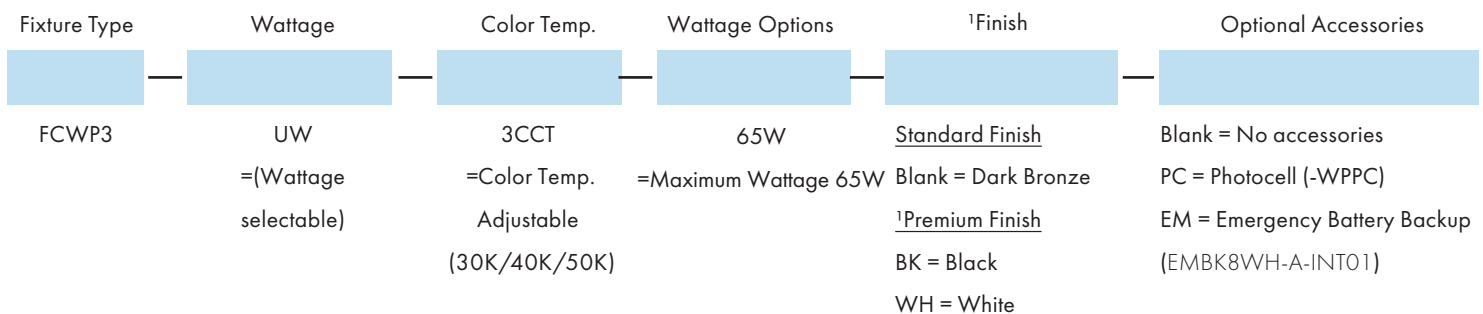

Note: 1.Premium finish incur an additional cost. Contact factory for MOQ and availability.

Fixture Type:
Project Name:
Location:
Date:

Product Information

		3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	
65W	9500lm	146lm/W	9700lm	151lm/W	9800lm	151lm/W	
48W	7400lm	154lm/W	7500lm	156lm/W	7600lm	158lm/W	
32W	4700lm	146lm/W	4800lm	150lm/W	4900lm	153lm/W	
16W	2300lm	143lm/W	2400lm	150lm/W	2500lm	156lm/W	

Optional Accessories



Internal Button Photocell

- SKU: WPPC
- Internal Photocell is pre-installed by request



Internal Emergency Battery Backup

- SKU: EMBK8WH-A-INT01
- Internal battery backup is pre-installed by request
- Delivery 900 lumen for 90 minutes emergency operation

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories