

TDWP Series

Tear Drop Style Wall Pack


Fixture Type:
Project Name:
Location:
Date:

Features

- Decorative, low profile architectural design wall pack
- Durable, die cast aluminum heat sink & housing.
- Dark bronze powder coat finish with polycarbonate lens.
- Wattage switchable, from 2100 lumen to 6300 lumen package with efficacy rating of 140lm/W.
- 3CCT adjustable 3000K/4000K/5000K, 80 CRI.
- Universal input voltage 120-277V, 50/60 Hz.
- Built in photocell (included)
- Optional emergency battery backup available
- 50,000 hour LEDs for reduced maintenance
- Suitable for wet location



Dimensions

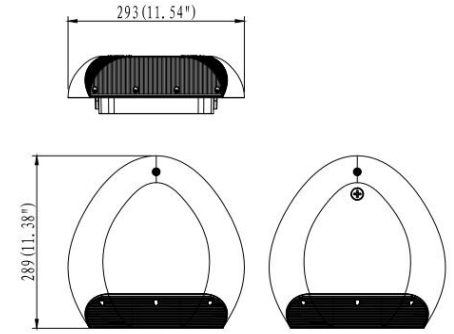


Product Performance Standard

Size	11.53"x11.38"x3.81"	Power Factor	90%
Weight	6.5lbs	Life Span	50,000 Hrs
IP Rate	IP66	Dimmable	1-10V Dimmable
Color Temp	3CCT	Efficacy	Up to 140 lm/W
CRI	80	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-30C° (-22°F) ~50C° (122°F)

Ordering Guide

Example: TDWP-UW3CCT

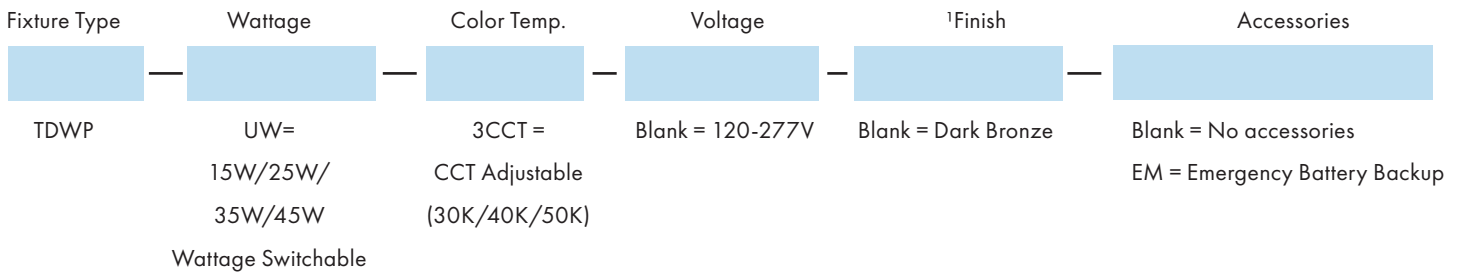

TDWP Series

Tear Drop Style Wall Pack

Fixture Type:

Project Name:

Location:

Date:

Product Information

WATTAGE	3000K		4000K		5000K	
	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
15W	2000lm	133lm/W	2100lm	140lm/W	2100lm	140lm/W
25W	3200lm	128lm/W	3500lm	140lm/W	3500lm	140lm/W
35W	4500lm	128lm/W	4900lm	140lm/W	4900lm	140lm/W
45W	6000lm	133lm/W	6300lm	140lm/W	6300lm	140lm/W