

TWPI Series

LED Traditional Wall Pack



Fixture Type:
Project Name:
Location:
Date:

Features

- Rugged die cast aluminum housing and seals to housing gasket with stainless steel screws
- Dark bronze powder coat finish
- Polycarbonate optical lens with UV stabilizer
- 1/2 inch threaded hole for easier wire connections
- J box or surface mounting
- Compatible with internal photocell and emergency battery
- Standard DLC 5.1



Dimensions

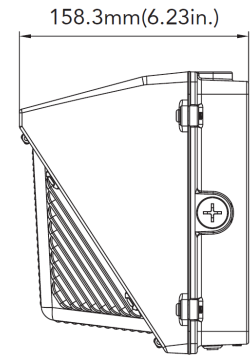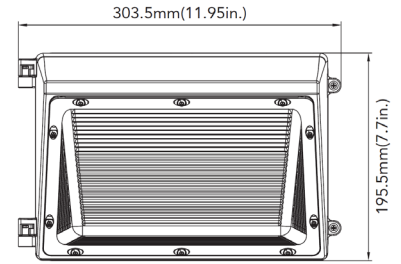

Product Performance Standard

Size	11.95in x 7.7in x 6.23in	Power Factor	90%
Weight	6 lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V dimming
Color Temp	4000K/5000K	Efficacy	up to 128 lm/W
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 40° (104°F)

Ordering Guide

Example: TWPI 45W 50K

Fixture Type	Wattage	Color Temp.	Voltage	¹ Finish	² Optional Accessories
TWPI	45W	40K = 4000K	Blank = 120-277V	Standard Color Finish	Blank = No accessories
	62W	50K = 5000K	HV = 347-480V	Blank = Dark Bronze	PC = Photocell (-WPPC)
				Premium Color Finish	EM = Emergency Battery Backup (-EMBK8WH-A-INT01)
				BK = Black	
				WH = White	

Note: 1. Standard color finish is dark bronze. Premium color finish incur on additional cost, consult factory for the availability.
2. Photocell, emergency battery only available for low voltage fixture.

Fixture Type:
Project Name:
Location:
Date:

Product Information

		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	
45W	5580lm	124lm/W	5580lm	124lm/W	
62W	7688lm	124lm/W	7688lm	124lm/W	

Optional Accessories



Internal Button Photocell

- SKU: WPPC
- Internal Photocell is pre installed by request



Internal Emergency Battery Backup

- SKU: EMBK8WH-A-INT01
- Internal battery backup is pre-installed by request
- Delivery 900 lumen for 90 minutes emergency operation

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories