

TWP1 Series

Features


- Rugged die cast aluminum housing and seals to housing gasket with stainless steel screws
- Dark bronze powder coat finish
- Polycarbonate optical lens with UV stabilizer
- 1/2 inch threaded hole for easier wire connections
- J box or surface mounting
- Compatible with internal photocell and emergency battery
- Standard DLC 5.1



Product Performance Standard

Size	11.95in x 7.7in x 6.23in	Power Factor	90%
Weight	6 lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V dimming
Color Temp	4000K/5000K	Efficacy	up to 128 lm/W
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 40° (104°F)

Ordering Guide Example: TWP1 45W 50K

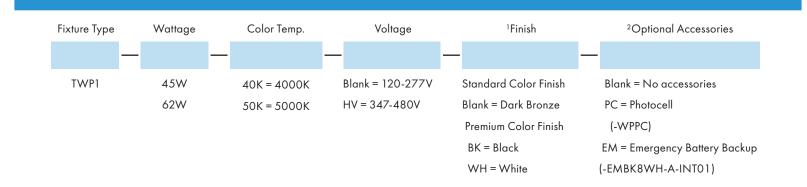

Note: 1.Standard color finish is dark bronze. Premium color finish incur on additional cost, consult factory for the availability. 2.Photocell, emergency battery only available for low voltage fixture.

Last updated: 12-5-22



Dimensions


Fixture Type:

Project Name:

Location:

Date:









TWP1 Series LED Traditional Wall Pack

Fixture Type:

Project Name:


Location:

Date:

Product Information

	4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY
45W	5580lm	124lm/W	5580lm	124lm/W
62W	7688lm	124lm/W	7688lm	124lm/W

Optional Accessories

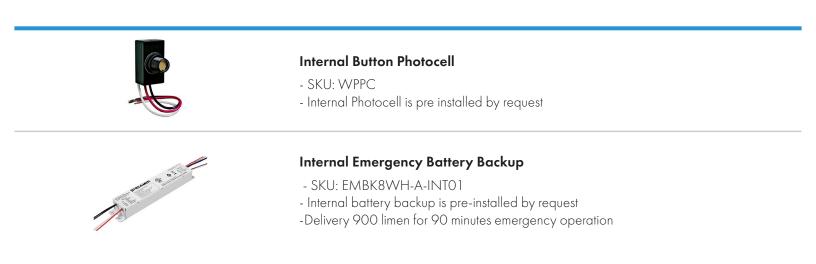


For the accessories detail, please visit www. lironlighting.com/product_categories/add-on-accessories





TWP1 Series LED Traditional Wall Pack

Wiring Diagram

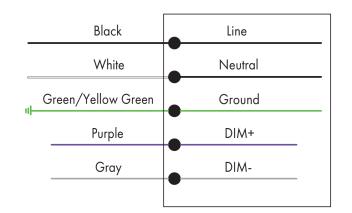

Fixture Type:

Project Name:

Location:

Date:



Scan the QR code or visit www.lironlighting.com/product/TWP1 for the complete luminare installation guide.

NOTE:



10835 S Wilcrest Dr, Ste C Houston TX 77099 | Customer Service : 833-875-4766 | Email : Sales@lironlighting.com Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.