

TWP2 Series

LED Traditional Wall Pack Series 2

Fixture Type:

Project Name:

Location:

Date:

Features

- Rugged die cast aluminum housing and seals to housing gasket with stainless steel screws
- Dark bronze powder coat finish
- Polycarbonate optical lens with UV stabilizer
- Field wattage selectable 25W/40W/52W/62W
- Field 3CCT color temperature adjustable 30K/40K/50K
- 1/2 inch threaded hole for easier wire connections
- J box or surface mounting
- Optional accessories internal photocell/emergency battery/motion sensor are available




Product Performance Standard


Size	11.95in x 7.68in x 7.08in	Power Factor	90%
Weight	5 lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	3CCT 30K/40K/50K	Efficacy	Up to 130 lm/W
CRI	70	Warranty	10 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 40° (104°F)



Switch for the Wattage & 3CCT selectable



Dimensions

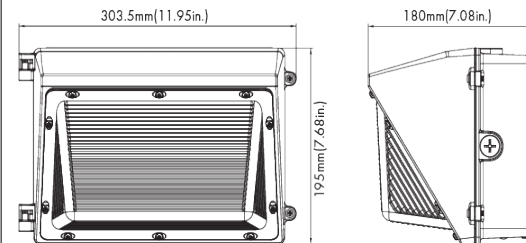

Ordering Guide

Example: TWP2-UW3CCT-62W

Fixture Type	Wattage	Color Temp.	Wattage Options	Finish	Optional Accessories
TWP2	UW = Wattage selectable	3CCT = Adjustable Color Temperature (30K/40K/50K)	62W =Maximum Wattage 62W	Standard Color Finish Blank = Dark Bronze Premium Color Finish BK = Black WH = White	Blank = No accessories PC = Photocell (-WPPC) EM = Emergency Battery Backup (-EMBK8WH-A-INT01) MS = Motion Sensor (-BL-PIR823-IN)

Note: 1. Standard color finish is dark bronze. Premium color incur on additional cost, contact factory for MOQ and availability.

Updated: 1-23-2023



10835 S Wilcrest Dr, Ste C Houston TX 77099 | Customer Service : 833-875-4766 | Email : Sales@ironlighting.com

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.ironlighting.com for most current technical information.

TWP2 Series

LED Traditional Wall Pack Series 2

Fixture Type:

Project Name:

Location:

Date:

Product Information

3000K			4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
25W	3200lm	128lm/W	3300lm	132lm/W	3400lm	136lm/W
40W	5100lm	127lm/W	5200lm	130lm/W	5300lm	132lm/W
52W	6500lm	125lm/W	6600lm	126lm/W	6800lm	131lm/W
62W	7700lm	124lm/W	7800lm	125lm/W	8100lm	124lm/W

Optional Accessories



Internal Button Photocell

- SKU: WPPC
- Internal Photocell is pre-installed by request



Internal Emergency Battery Backup

- SKU: EMBK8WH-A-INT01
- Internal battery backup is pre-installed by request
- Delivery 900 lumen for 90 minutes emergency operation



Internal PIR - Motion Sensor

- SKU: BL-PIR823-IN
- Motion Sensor is pre-installed by request
- Provide multi-level control based on motion or daylight contribution

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories



