

UHB1 Series

LED UFO High Bay

Fixture Type:

Project Name

Location:


Date:

Features

- Durable die-cast aluminum housing and heat dissipating fins for excellent thermal control
- Impact resistant tempered glass
- Black powder coat finish
- Wattage selectable 200W/150W/100W
- Color temperature 5000K
- Efficacy up to 150 LPW
- Optional plug& play motion sensor and battery backup available
- 1/2" threaded hole
- 6ft power cord
- Suitable for wet location
- 5 years warranty



Dimensions

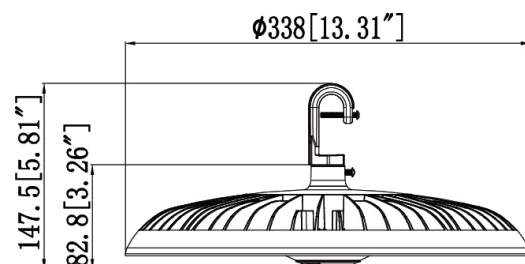

Product Performance Standard

Size	13.2 X 7.5inch	Beam Angle	80°
Weight	12 lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	5000K	Efficacy	150 LPW
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 50C° (122°F)

Ordering Guide

Example: UHB1 UW50K

Fixture Type	Wattage	Color Temp.	Voltage	Optional Accessories
UHB1	UW =200/150/100W Wattage Selectable	50K = 5000K	Blank = 120-277V	Blank = No accessories MS01 =PIR plug and play EM30 = Emergency Battery Backup UHB1-PCR = PC Reflector (UHB1-PCREFLECTOR)

Last updated: 4-24-2023



UHB1 Series

LED UFO High Bay

Fixture Type:

Project Name

Location:

Date:

Product Information

5000K		
WATTAGE	LUMEN	EFFICACY
100W	13,000lm	150lm/W
150W	22,500lm	150lm/W
200W	30,000lm	150lm/W

Optional Accessories



3PIN PIR Plug and play Motion Sensor

- SKU:BL-ANT3PIN-PIR
- 3PIN infrared motion sensor 12-24V DC
- Factory default setting 100% sensitivity hold time 5min dimming level 30% dimming time 60mins



External Emergency Battery Backup

- **SKU:EMBK-UHB30W01**
- External battery backup is field installed only
- 90 minutes emergency operation



PC Reflector

- SKU:UHB1-REFLECTOR
- Polycarbonate reflector only suitable 240W fixture.



Date:

Wiring Diagram



Scan the QR code or visit
www.lironlighting.com/product/uhb1 for the
complete luminaire installation guide.

NOTE: