

BLR3 Series

LED Bollard

Fixture Type:

Project Name:

Location:



Date:

Features

- Durable die cast aluminum housing
- Black polyester powder coat finish
- Polycarbonate optical lens
- 24W with efficacy of up to 120 lm/W
- Single color temperature 3000K/4000K/5000K
- Professional type V light distribution



Dimensions

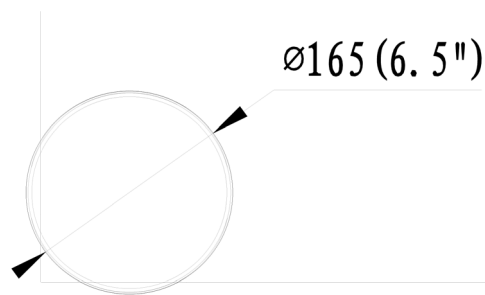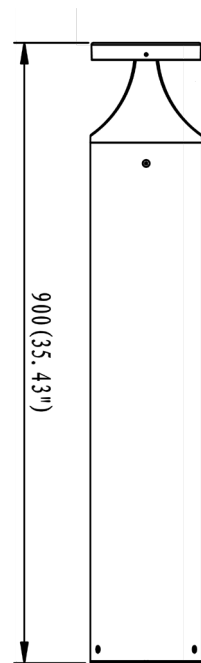

Product Performance Standard

Size	42in x 5.5in	Power Factor	90%
Weight	12lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	3000/4000/5000K	Efficacy	Up to 120 lm/W
CRI	80	Warranty	5 Years
Input Voltage	100-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 40° (113°F)

Ordering Guide

Example: BLR3 24W 3000K

Fixture Type

Wattage

Color Temp.

Voltage

Finish

BLR3	24W = 24 Watt	3000K 4000K 5000K	Blank = 100-277V	Blank = Black
------	---------------	-------------------------	------------------	---------------



BLR3 Series

LED Bollard

Fixture Type:

Project Name:

Location:

Date:


Product Information

3000K			4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
24W	2640lm	110lm/W	2760lm	115lm/W	2880lm	120lm/W



**Date:**

Wiring Diagram

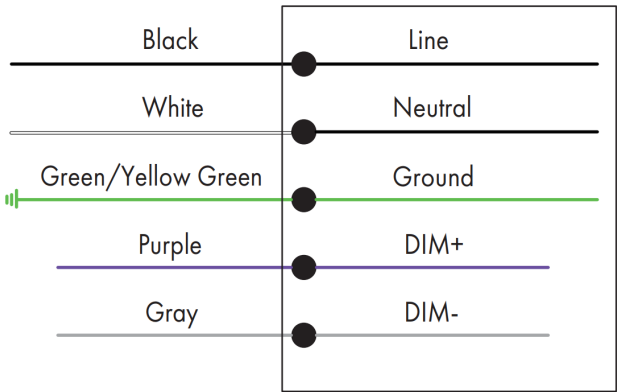

Scan the QR code or visit
www.lironlighting.com/product/BLR2 for the
complete luminaire installation guide.

NOTE: