

## **BLR3 Series**

LED Bollard

Fixture Type:	
Project Name:	
Location:	
Date:	

#### **Features**

- Durable die cast aluminum housing
- Black polyester powder coat finish
- Polycarbonate optical lens
- 22W with efficacy of up to 120 lm/W
- Color temperature: 3CCT
- Professional type V light distribution















### **Product Performance Standard**


Size	42in x 5.5in	Power Factor	90%
Weight	12lb	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	3CCT	Efficacy	Up to 120 lm/W
CRI	80	Warranty	5 Years
Input Voltage	100-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 40° (113°F)

#### **Dimensions**

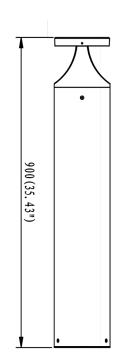



**Ordering Guide** Example: BLR3 22W 3CCT







# **BLR3 Series**

LED Bollard

Fixture Type:
Project Name:
Location:
Date:

## **Product Information**

	30	000К	40	00K	500	OOK
WATTAGE	LUMEN	<b>EFFICACY</b>	LUMEN	<b>EFFICACY</b>	LUMEN	<b>EFFICACY</b>
22W	2420lm	110lm/W	2530lm	115lm/W	2640lm	120lm/W





## **BLR3 Series**

LED Bollard

Fixture Type:	
Project Name:	
Location:	
Date:	

### **Wiring Diagram**

_	Black	Line
	White	Neutral
ı⊩	Green/Yellow Green	Ground
""	Purple	DIM+
	Gray	DIM-



Scan the QR code or visit www.lironlighting.com/product/BLR2 for the complete luminare installation guide.



