

# BLR3 Series

3CCT Selectable LED Bollard

**Fixture Type:**

**Project Name:**

**Location:**



**Date:**

## Features

- Durable die cast aluminum housing
- Black polyester powder coat finish
- Polycarbonate optical lens
- 24W with efficacy of up to 120 lm/W
- 3CCT adjustable 3000K/4000K/5000K
- Professional type V light distribution



## Dimensions

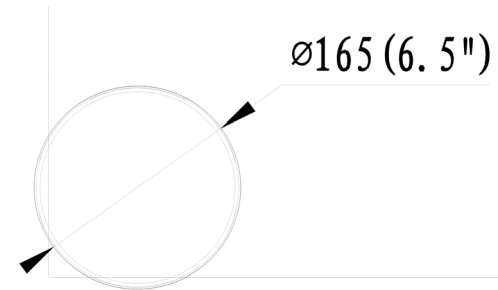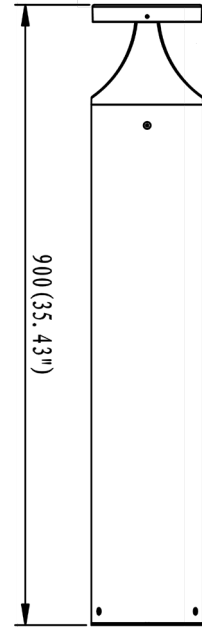


## Product Performance Standard

<b>Size</b>	42in x 5.5in	<b>Power Factor</b>	90%
<b>Weight</b>	12lb	<b>Life Span</b>	50,000 Hrs
<b>IP Rate</b>	IP65	<b>Dimmable</b>	1-10V Dimmable
<b>Color Temp</b>	3CCT 30/40/50K	<b>Efficacy</b>	Up to 120 lm/W
<b>CRI</b>	80	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	100-277V	<b>Ambient Operation Temperature</b>	-40C° (-40°F) ~ 40° (113°F)

## Ordering Guide

Example: BLR2 UW 3CCT

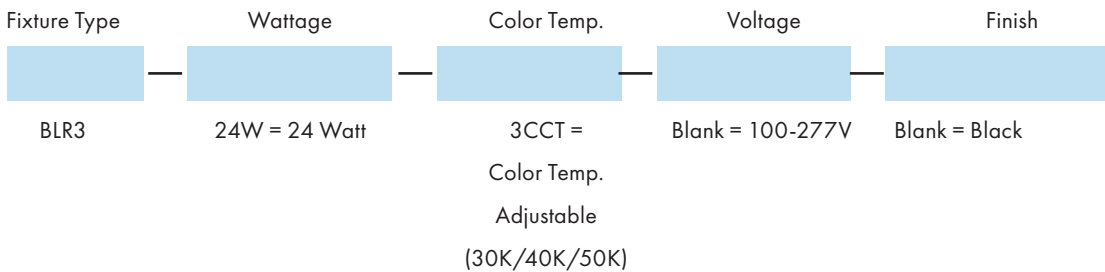

Updated: 7-7-2022





# BLR3 Series

3CCT Selectable Bollard

<b>Fixture Type:</b>
<b>Project Name:</b>
<b>Location:</b>
<b>Date:</b>

## Product Information

		3000K			4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY		
24W	2640lm	110lm/W	2760lm	115lm/W	2880lm	120lm/W		



