

UFO HIGH BAY




WARNING

1. To avoid electric shock, disconnect power at source prior to installation.
2. The installation should be performed by qualified electricians or lighting technicians.
3. Before conducting any installation, maintenance, or removal, disable all power to the luminaire and wait until the fixture cool down.
4. Do not touch the fixture while it is in service.
5. If there is any problem with the fixture, DO turn off power and DO NOT attempt repair unless you are a qualified technician or the customer service member.
6. This luminaire is designed to operate in ambient temperatures ranging from -40° c to 40° c and to be horizontally mounted with the LEDs facing down
7. This product is not available for several special environments, such as places with corrosive gas liquids or high pressure water vapor.

SHOCK HAZARD!



Turn power OFF at circuit breaker prior to installation or servicing.




TOOLS REQUIRED

Tools:

1. Sharp Side Cutter
2. Electric Drill
3. Level
4. Measuring Tool
5. Wire Stripper / Knife
6. Philips Screwdrivers
7. Wire Cutters




WIRING

CORD/ SUPPLY WIRING

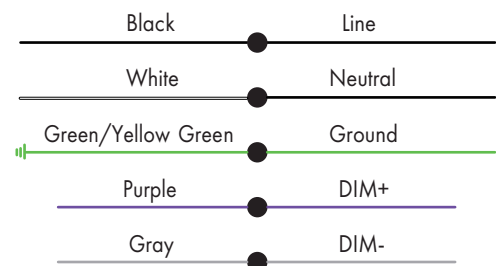

1. Ring Style Installation

1. Screw the ring into 1/2" hole on high bay light.
2. After the ring screwed in, tighten the screw. It keep the ring from loosening and falling.
3. Installation done.



2. Hook Mount

1. Screw the hook into 1/2" hole on high bay light.
2. After the hook screwed in, tighten the screw. It keep the ring from loosening and falling.
3. Installation done.

