


CSP2 Series


FIXTURE TYPE:
 PROJECT NAME:
 LOCATION:
 DATE:

LED FLUSH MOUNT DOWNLIGHT

Discontinued product. Available while supplies last.

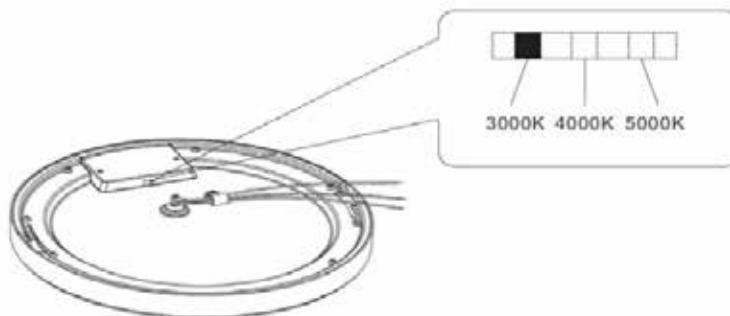

Dimensions

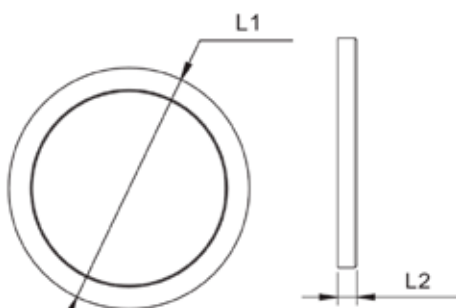

	10W	15W	18W	24W
L1	5"	7.09"	8.86"	12"
L2	0.71"	0.71"	0.71"	0.71"

Product Performance Standard

Size	9"/12"
Mounting	Flush Mount
CRI	80
Color Temp	3CCT
Input Voltage	120V
Power Factor	90%
LED Lifespan	50,000 Hrs
Dimmable	Triac Dimming
Efficacy	up to 80 lm/W
Warranty	5 Years
Ambient Operation Temperature	-15°C (-4°F)~40°C (104°F)

CSP2 Series

FIXTURE TYPE:
 PROJECT NAME:
 LOCATION:
 DATE:

LED FLUSH MOUNT DOWNLIGHT

Features

- 3CCT color temperature adjustable 30/40/50K
- Polycarbonate engineering plastic housing
- Durable polycarbonate Lens
- Triac dimming
- Easy installation for flush mount to most standard J-box
- Suitable for wet location
- Available in white finish

Ordering Guide Example: CSP2-15W7IN-3CCT-WH

Fixture Type	Size & Wattage	Color Temp	Voltage	Finish
CSP2	18W9IN= 18Watt 9 Inch 15W12IN = 15Watt 12 Inch	3CCT = 30/40/50K (Color Temperature Adjustable)	Blank = 120V	WH = White

Discontinued product. Available while supplies last.

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:


LED FLUSH MOUNT DOWNLIGHT

Product Information

	3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
18W9IN	1350lm	75lm/W	1404lm	78lm/W	1440lm	80lm/W
15W12IN	1125lm	75lm/W	1170lm	78lm/W	1200lm	80lm/W

Photometric

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

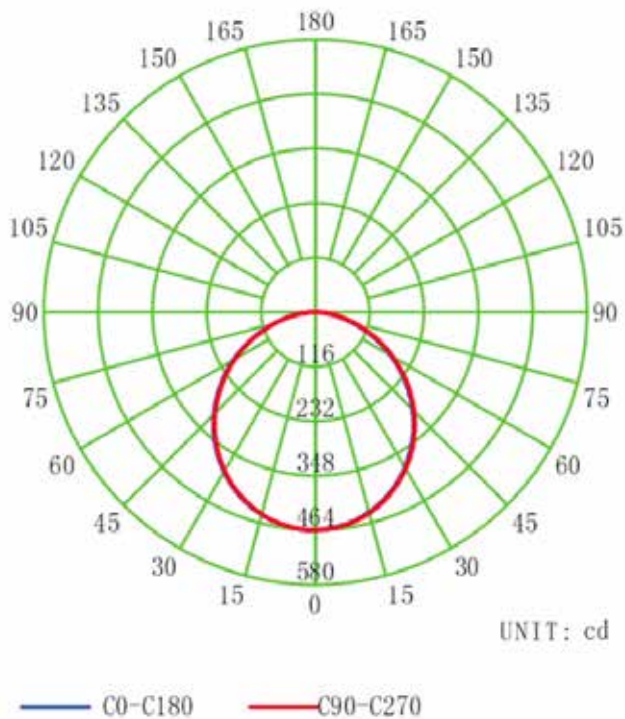

VERTICAL EQUILUMINOUS CURVE

