LIRON LIGHTING

CNP2 Series

Wattage and 3CCT Selectable Canopy

Fixture Type:

Project Name

Location:

Date:

Features

- Durable die-cast aluminum housing and heat dissipating fins for excellent thermal control
- Impact resistant tempered glass
- Dark bronze powder coat finish
- Wattage selectable 80W/60W/40W
- 3CCT Color temperature adjustable 3000K/4000K/5000K
- Efficacy up to 135 LPW
- Surface mount or pendant mount
- Optional accessories internal emergency battery and motion sensor

5 YEAR WARRANTY · IP65 · UL LISTED · Adjustable wattage · Adjustable CCT · 90 mins

Dimensions

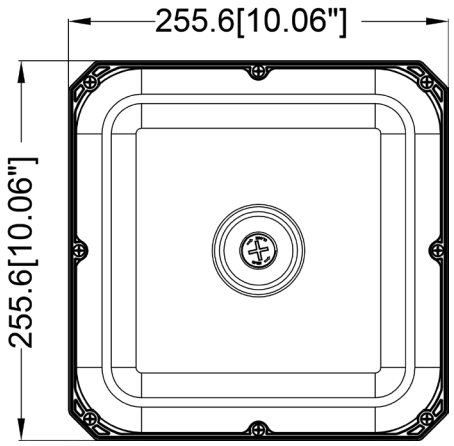

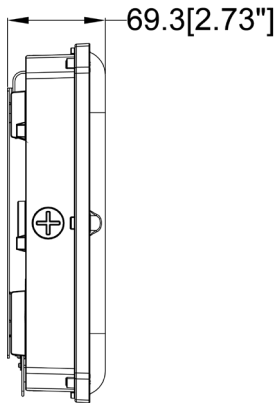

Product Performance Standard

Size	10" x 10" x 2.7"	**Power Factor**	90%
Weight	6 lb	**Life Span**	50,000 Hrs
IP Rate	IP65	**Dimmable**	0-10V Dimmable
Color Temp	3000K/4000K/5000K	**Efficacy**	Up to 135 lm/W
CRI	80	**Warranty**	5 Years
Input Voltage	100-277V	**Ambient Operation Temperature**	-40C° (-40°F) ~ 45C° (113°F)

Ordering Guide

Example: CNP2 UW 3CCT

Fixture Type	Wattage	Color Temp.	Voltage	Finish	Optional Accessories
CNP2	UW 80/60/40W Wattage Selectable	3CCT = Color temperature adjustable 30/40/50K	Blank = 100-277V	Blank = Black	Blank = No accessories MS = Motion Sensor EM = Emergency Battery Backup

Last updated: 7-21-2022

10835 S Wilcrest Dr, Ste C Houston TX 77099 | Customer Service : 833-875-4766 | Email : Sales@lironlighting.com

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.

LIRON LIGHTING

CNP2 Series

Wattage and 3CCT Selectable Canopy

Fixture Type:

Project Name

Location:

Date:

Product Information

	3000K		4000K		5000K	
WATTAGE	**LUMEN**	**EFFICACY**	**LUMEN**	**EFFICACY**	**LUMEN**	**EFFICACY**
80W	10400	130lm/W	10640	133lm/W	10800	135lm/W
60W	7800	130lm/W	7980	133lm/W	8100	135lm/W
40W	5200	130lm/W	5320	133lm/W	5400	135lm/W

Optional Accessories

Internal Plug and Play Motion Sensor

- Internal motion sensor is field installed or pre-installed by request

Internal Emergency Battery Backup

- External battery backup is field installed or pre-installed by request
- Delivery 900 lumen for 90 minutes emergency operation

For the accessories detail, please visit www. lironlighting.com/product_categories/add-on-accessories

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.

LiRON LiGHTING

CNP2 Series

Wattage and 3CCT Selectable Canopy

Fixture Type:

Project Name

Location:

Date:

Wiring Diagram

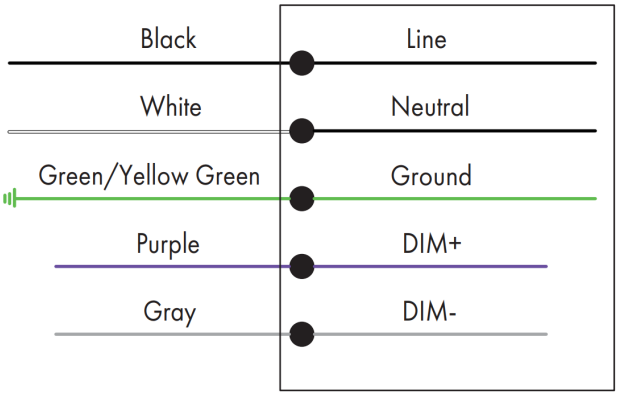

Scan the QR code or visit www.lironlighting.com/product/cnp2 for the complete luminare installation guide.

NOTE:

Due to continuous product improvements, specifications and dimensions are subject to change without notice. Certain options have limited compatibility with some other product selections. Consult www.lironlighting.com for most current technical information.