

## MST2 Series

LED Sport Light

Fixture Type:

Project Name

Location:



Date:

### Features

- LED sports light, with high quality aluminum housing and zinc coating for corrosion resistance
- Light beam can be angled at 15°/30°/45°/60°/120°
- Included adjustable trunnion mount
- Optional laser aiming sight for optimal positioning
- Pivoting reflector hood, adjustable from 0° to 35°
- Effective heat dissipation vents to help cool driver



### Dimensions

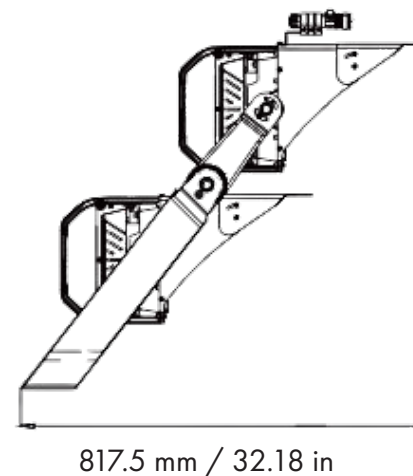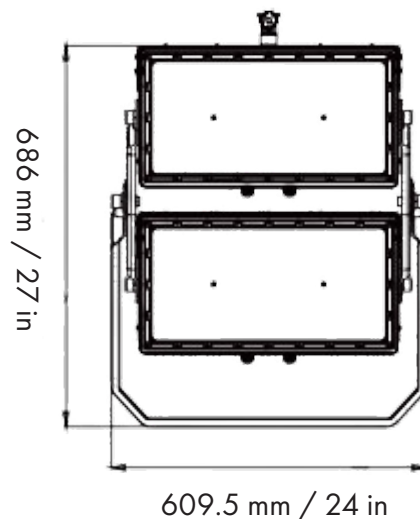

### Product Performance Standard

Size:	24" x 32.18" x 27"	Power Factor:	95%
Weight:	88.18lbs	LED Life Span:	50,000 Hrs
IP Rate:	IP66	Dimmable:	1-10V Dimmable
Color Temp:	2700-5000K RGB/RGBW	THD:	<15%
CRI:	80	Warranty:	5 Years
Input Voltage:	120-277V	Ambient Operation Temperature:	-40C° (-40°F) ~50C° (122°F)

### Ordering Guide

Example: MST2-800W-27K-15-LA

Fixture Type	Wattage	Color Temp.	Voltage	Beam Angle	Finish	Optional Accessories
MST2-	800W	27K = 2700K	Blank = 120-277V	15 = 15°	Blank = Silver	Blank = No Accessories
	1000W	30K = 3000K	HV = 277-480V	30 = 30°		LA = Laser Aiming Sight
	1200W	40K = 4000K		45 = 45°		
		50K = 5000K		60 = 60°		
		RGB		120 = 120°		
		RGBW				

## MST2 Series

LED Sport Light

Fixture Type:

Project Name







Location:

Date:

### Performance Data

WATTAGE	EPA	5000K	
		LUMEN	EFFICACY
800W	1.79	104,000lm	130 lumens/watt
1000W	1.79	130,000lm	130 lumens/watt
1200W	1.79	156,000lm	130 lumens/watt

### Distribution Type

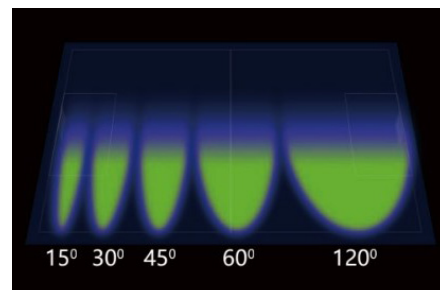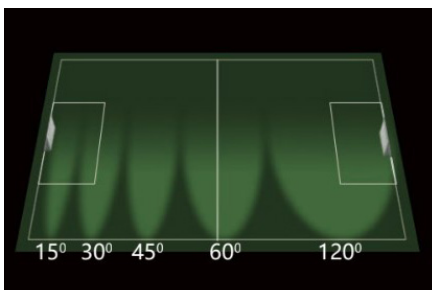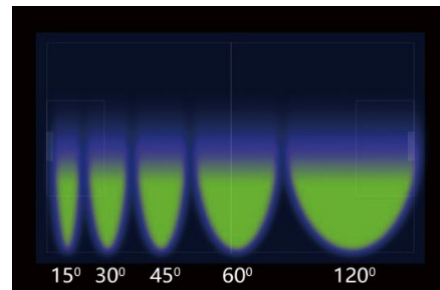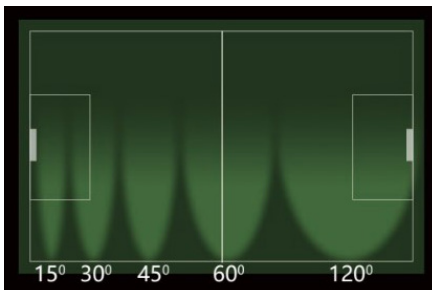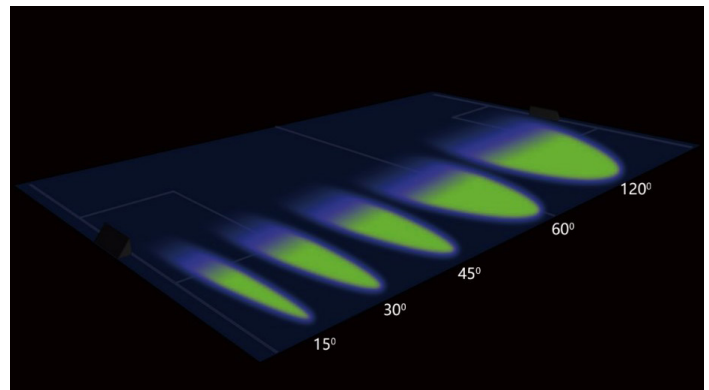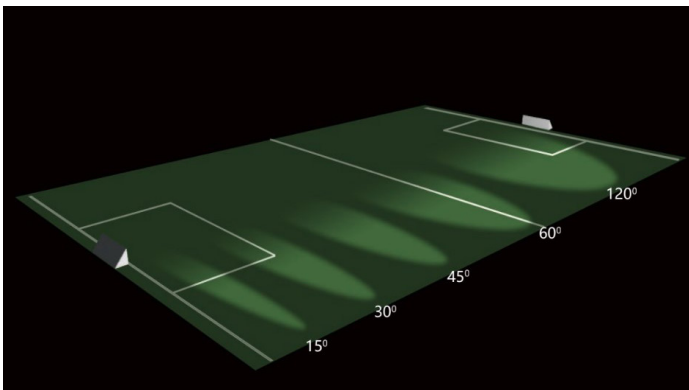

## MST2 Series

LED Sport Light


**Fixture Type:**

**Project Name**


**Location:**

**Date:**


### Distribution Type

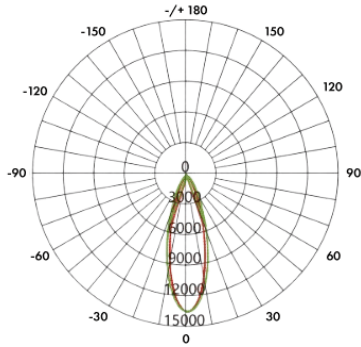


15° Beam Angle

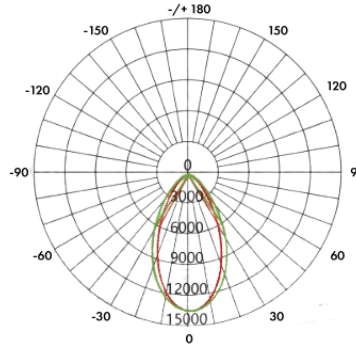


30° Beam Angle

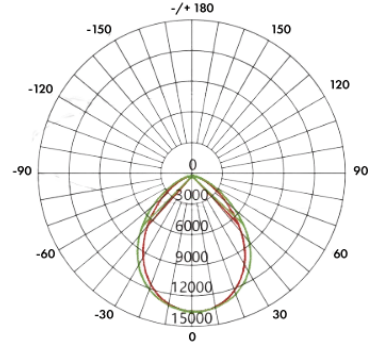

45° Beam Angle

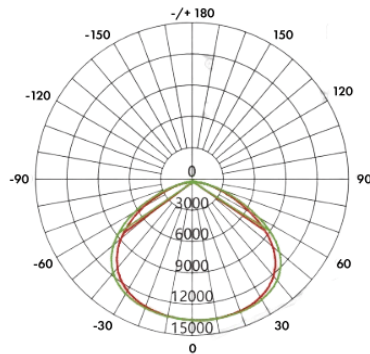

60° Beam Angle

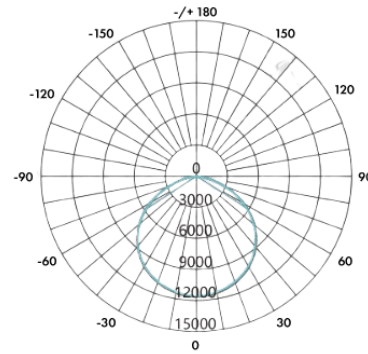

120° Beam Angle

### Optional Accessories



#### Laser Aiming Sight

- SKU: LASERAIMINGSIGHT

- Our laser aiming device provides precise control in angling and aiming to your exact optimal positioning



## Date:

**NOTE:**