


WR4 Series

FIXTURE TYPE: _____
 PROJECT NAME: _____
 LOCATION: _____
 DATE: _____

LED WRAP AROUND



Dimensions

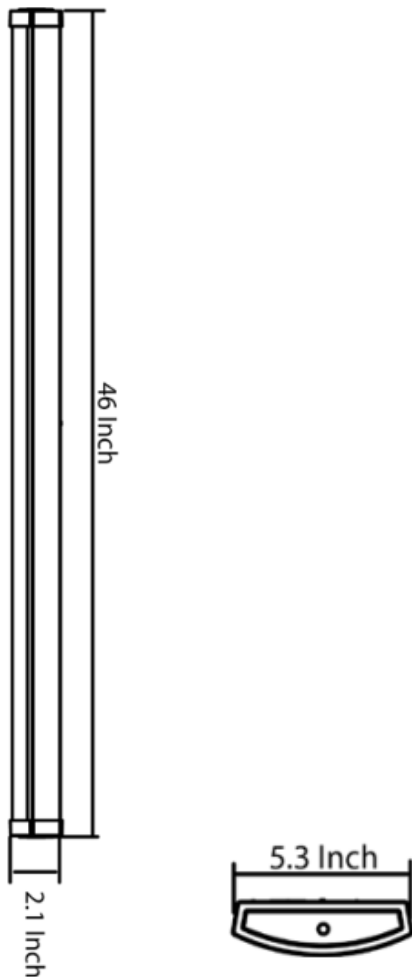

Product Performance Standard

Size	46 in x 5.31 in x 2.1 in
Weight	6 lb
Mount	Surface Mount
CRI	80
Color Temp	3CCT 30/40/50K
Input Voltage	100-277V
Power Factor	90%
Life Span	50,000 Hrs
Dimmable	0-10V Dimmable
Efficacy	up to 120 lm/W
Warranty	5 Years
Ambient Operation Temperature	-10°C (14°F) ~ 40°C(104°F)
Listing	DLC, UL

WR4 Series

FIXTURE TYPE:
PROJECT NAME:
LOCATION:
DATE:

LED WRAP AROUND

Features

- LED 40W 4FT low profile wrap around
- High quality steel housing
- Polycarbonate lens protects LEDs while evenly distributing light with reduced glared.
- It emits 5000 lumen of brightness with 3CCT color temperature adjustable light output
- Optional motion sensor and emergency battery backup available

Ordering Guide Example: WR4-40W3CCT

Fixture Type	Wattage	Color Temp	Voltage	Finish	Optional Accessories
WR4	40W	3CCT = 30K/40K/50K (Color temperature adjustable)	Blank = 120-277V	Blank = White	Blank = No accessories MS = Motion Sensor (BL-PIR819-EX) EM = Emergency Battery Backup (EMBK5W-S-INT02)

Product Information

WATTAGE	3000K		4000K		5000K	
	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
40W	4880lm	122lm/W	4920lm	123lm/W	5000lm	125lm/W

Optional Accessories



External motion sensor

- SKU: BL-PIR819-EX
- External motion sensor is pre-installed by request



Internal Emergency Battery Backup

- SKU: EMBK5W-S-INT02
- Internal battery backup is pre-installed by request
- Delivery for 90 minutes emergency operation