

LEDEXTCMBRC-R/G Series

Bi Color Red/Green LED Exit Sign - Remote Head Capable

Fixture Type:
Project Name
Location:
Date:

Features


- Bi color Red /Green LED, capable with remote head
- injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- Letters 6" height with 3/4" stroke. Optional RED letters
- Single or double face(Universal).
- Removable directional indicators
- Universal J-box mounting pattern
- 120V-277VAC Universal voltage operation
- 2X1W SMT LED lamp heads for emergency mode
- Built-in 3.6V 2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time
- Test switch and charge indicator
- UL and cULus listed



EMCRHWP2-JL



EMCRHWP1-JL

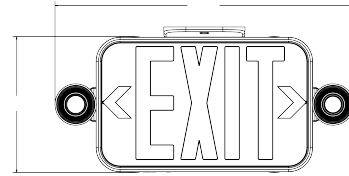


Ceiling mount

Product Performance Standard

Size	7.2 in x 11 in x 16.5in	Voltage	120/277 Vac
Weight	2 lb	Life Span	50,000 Hrs
Mounting	Wall	Input Power	2W
Color Temp	6000K	Battery	Nickel Cadmium
Luminous	240lm	Warranty	5 Years
Packing Info	6pcs/Box	Ambient Operation Temperature	0C° (32°F) ~40C° (104°F)

Dimensions

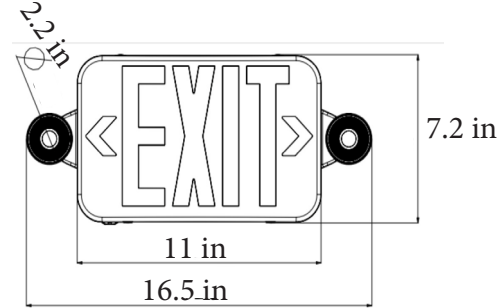

Wall mount

Ordering Guide

Example: LEDEXTCMBRC-R/G -

Exit Combo Light:

Fixture Type	Description
LEDEXTCMBRC-R/G	Bi color red/green exit combo, dual head adjustable ,compatible with remote head,UL list

Remote Head:

Fixture Type	Description
EMCRHWP2-JL	Outdoor double remote lamp head, 1W x 2 ultra bright white LED lamp head
EMCRHWP1-JL	Outdoor single remote lamp head, 1W x 2 ultra bright white LED lamp head

LEDEXTCMBRC-R/G Series

Bi Color Red/Green LED Exit Sign - Remote Head Compatible

Fixture Type:

Project Name

Location:

Date:

Remote Head - EMC-RHWP1-JL/EMC-RHWP2-JL

- LED Indoor/outdoor double remote lamp head
- Injection-molded thermoplastic ABS housing,UL 94V-0 flame rating.
- 3.6V/9.6,1.2W*2 ultra bright white LED lamps available
- The remote capable emergency light is designed to operate with remote capable LED combos and Emergency lights,a "remote head" is a stand-alone lamp with no internal power supply,it provides an efficient means of providing additional lighting



EMC-RHWP1-JL



EMC-RHWP2-JL

Dimensions

