

2.3" Linear Suspended Pattern Run Luminaire

Fixture Type:	
Project Name:	
Location:	
Date:	


Features

- 2.3" wide achitectural linear luminaries is available in 2ft, 3ft, 4ft and 8ft.
- Simply provide wide, powerful lighting to any atmosphere with continuous runs.
- Extruded aluminum housing with preminum powder coat white or black finish.
- 7 embedded adjustable light distribution by dip switch 100%up,100%down,50%up 50%down,10%up 90% down,30%up 70%down,70%up 30%down,90%up 90%down.
- -Color temperature adjustable 3000K/3500K /4000K.
- Wattage selectable 100%/75%/50%
- Standard optical diffuser lens, optional reflector lens, louver lens and deep regressed lens
- Various mounting option included suspended mount, surface mount and wall mount.
- Optional emergency battery backup is available.





Dimensions

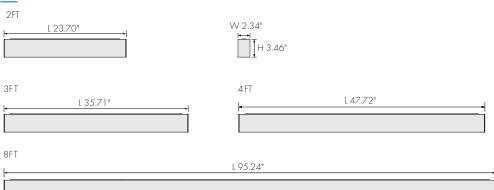

Specification


Material	Extruded aluminum housing	Efficacy	117lm/W
Lens	Diffuser/Louver/Reflector/Deep regressed	LED Life Span	50,000 hrs
Beam angle	110 degree	Dimmable	0-10V Dimming
Color Temp	3CCT 3000K/3500K/4000K	OOK/3500K/4000K	
CRI	90	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-20°C(-4°F) to 40°C (104°F)
Installation	Suspended mount	Listing	UL Listed Damp Location





2.3" Linear Suspended Pattern Run Luminaire

Fixture Type:	
Project Name:	
Location:	
Date:	

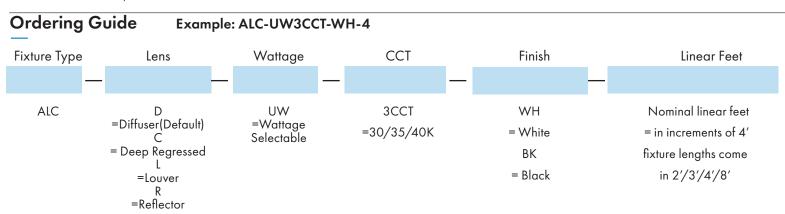

Optional Accessories




Mounting Ceiling Type - Dry wall ceiling or Drop ceiling

Dry wall Ceiling Mount Individual Run Example: AL-PDW-S-BK-kit

	Canopy Shape	Finish	Notes:
AL-PDW			Dry wall ceiling mounts kit will consist of: 1 pc - 4" round or square canopy for power feed side,
Dry Wall Mounting	R=Round	WH=Black	1 pc - 4" round or square canopy for non power feed side, 1 pc - 2"round or square canopy for non power feed side,
Kit	S=Square	BK=Black	1 pc - J-box cross bar, 1 pc - 5FT Power feed, 1 set - 5ft aircraft Cable.

Dry wall Ceiling Mount Continuned Run Example: AL-PDW-S-BK, AL-NDWCNP-S-BK-2, ALC-LC

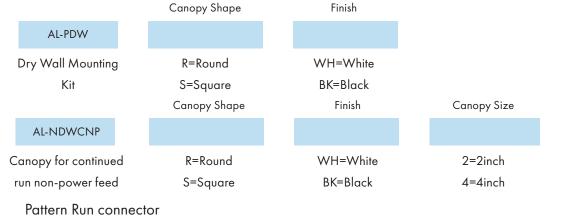

ALC-CC = Cross Connector

ALC-YC = Y Connector

ALC-VC = V Connector

ALC-TC = T Connector

ALC-LC = L Connector





2.3" Linear Suspended Pattern Run Luminaire

Fixture Type:	
Project Name:	
Location:	
Date:	

Drop	Ceilina	Mount	Individual	Run	Example: AL-PTB-R-9-F-WH-KIT
------	---------	-------	------------	-----	------------------------------

	Canopy Shape	Grid Size	Grid Type	Finish
AL-PTB				
Drop ceiling	R=Round	9=9/16	F=Flat	WH=Blank
mounting kit	S=Square	15=15/16	S=Slot	BK=Black

Notes:

Drop ceiling mounts kit will consist of:

1 pc - 4" round or square canopy for power feed side,

1 pc - 4" octogon junction box

1 pc - 4" round or square canopy for non power feed side,

1 pc - 2"round or square canopy for non power feed side,

1 set - T-grid clips for both power feed and non power feed,

1 pc - 5FT Power feed,

1 set - 5ft aircraft Cable.

Drop Ceiling Mount Continuned Run Example: AL-PTB-R-9-F-WH, AL-NTBCNP-R-9-F-WH-2, ALB-FC

Power feed	Canopy Shape	Grid Size	Grid Type	Finish	
AL-PTB					
Drop ceiling mount	R=Round S=Square	9=9/16 15=15/16	F=Flat S=Slot	WH=Blank BK=Black	
Non-Power feed AL-NTBCNP	Canopy Shape	Grid Size	Grid Type	Finish	Canopy Size
Drop ceiling mount Non-Power feed side	R=Round S=Square	9=9/16 15=15/16	F=Flat S=Slot	WH=Blank BK=Black	4=4inch 2=2inch

Linear Run connector

ALC-CC = Cross Connector ALC-YC = Y Connector ALC-VC = V Connector ALC-TC = T Connector ALC-LC = L Connector







2.3" Linear Suspended Pattern Run Luminaire

Fixture Type:
Project Name:
Location:
Date:

Mounting











Drop Ceiling / Off Grid

Compatible for various T grid

- 9/16" Flat
- 15/16" Flat
- 9/16" Slat
- 15/16" Slat



9/16" Flat Ceiling





15/16" Flat Ceiling



Pendant Accessories For Dry Ceiling

Canopy Kits



Power Cord Kits



Aircraft Cable Kits



Pendan t Accessorie s For Drop Ceilin g

Canop y Kits



Power Cord Kits



T-grid Clips



Junctio n Box



Aircraft Cable Kits





2.3" Linear Suspended Pattern Run Luminaire

Fixture Type:
Project Name:
Location:
Date:

Performance Data:

Medium Lens High Low Diffuser 1,150lm/ft,10w/ft 860lm/ft,7.5w/ft 575lm/ft,5w/ft 900lm/ft, 10w/ft 675lm/ft,7.5w/ft 450lm/ft,5w/ft Louver 1,150lm/ft,10w/ft 860lm/ft,7.5w/ft 575lm/ft,5w/ft Reflector 950lm/ft, 10w/ft 710lm/ft,7.5w/ft 475lm/ft,5w/ft Deep Regressed






2.3" Linear Suspended Pattern Run Luminaire

Fixture Type:	
Project Name:	
Location:	
Date:	



Cross Connector


Provide A/B/C/D dimension Example: A=4', B=4', C=4', D=4' Part number: ALC-CC4444






T Shape Connector


Provide A/B/C dimension Example: A=4', B=2', C=4' Part number: ALC-TC424






Y Shape Connector

Provide A/B/C dimension Example: A=4', B=4', C=4' Part number: ALC-YC444






V Shape Connector

Provide A/B dimension Example: A=4', B=4' Part number: ALC-VC44





L Shape Connector

Provide A/B dimension Example: A=4', B=4' Part number: ALC-IC44



25.56" for 2' fixture 50.64" for 4' fixture 100.92" for 8' fixture







2.3" Linear Suspended Pattern Run Luminaire

Fixture Type:
Project Name:
Location:
Date:

Optional Accessories

Emergency Battery Backup:



8W Emergency Batter Backup SKU: EMBK8WH-A-EXT02

- Field install only .
- 8W emergency battery provided up to 680 lumen during the emergency mode.