

# RD Series

## 5CCT Recessed Downlight


<b>Fixture Type:</b>
<b>Project Name:</b>
<b>Location:</b>
<b>Date:</b>

### Features

- PC driver housing and aluminum reflector with white finish
- Easy clip-in to existing can housing
- Selectable 5CCT from 2700K to 5000K
- Continuous dimming from 100% to 5% with many Triac Dimmers
- Standard white baffle trim, color removable trim available (sold separately): Brushed nickel, Black, Bronze.
- IP 20 only for indoor use
- Suitable for damp location



### Dimensions

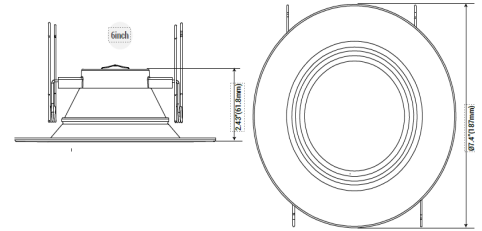


### Product Performance Standard

<b>Size</b>	6"	<b>Power Factor</b>	90%
<b>Weight</b>	4lb	<b>Life Span</b>	50,000 Hrs
<b>Mounting</b>	Recessed Mount	<b>Dimmable</b>	Triac dimmable
<b>Color Temp</b>	5CCT	<b>Efficacy</b>	up to 80 lm/W
<b>CRI</b>	90	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120V	<b>Ambient Operation Temperature</b>	-20C° (-4°F) ~ 40° (122°F)

### Ordering Guide

Example: RD15W6IN5CCT-BF

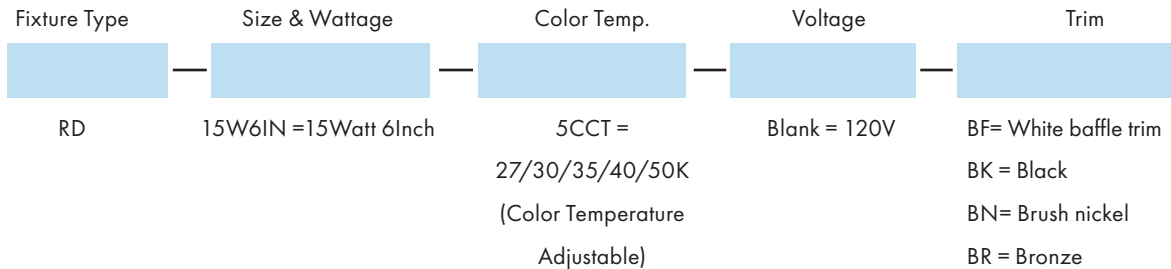

# RD Series

5CCT Recessed Downlight

**Fixture Type:**

**Project Name:**

**Location:**

**Date:**

## Product Information

		2700K		3000K		3500K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	
15W	969lm	64lm/W	1035lm	69lm/W	1110lm	74lm/W	1158lm	77lm/W	1093lm	72lm/W	

## Accessories



E26 Adapter  
Included



Brushed nickel



Black



Bronze