

RD Series

5CCT Recessed Downlight

Fixture Type:

Project Name:

Location:


Date:

Features

- PC driver housing and aluminum reflector with white finish
- Easy clip-in to existing can housing
- Selectable 5CCT from 2700K to 5000K
- Continuous dimming from 100% to 5% with many Triac Dimmers
- Standard white baffle trim, color removable trim available (sold separately): Brushed nickel, Black, Bronze.
- IP 20 only for indoor use
- Suitable for damp location



Dimensions

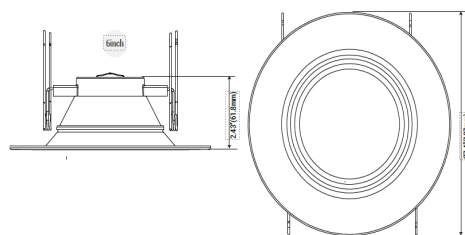

Product Performance Standard

Size	6"	Power Factor	90%
Weight	4lb	Life Span	50,000 Hrs
Mounting	Recessed Mount	Dimmable	Triac dimmable
Color Temp	5CCT	Efficacy	up to 80 lm/W
CRI	90	Warranty	5 Years
Input Voltage	120V	Ambient Operation Temperature	-20C° (-4°F) ~ 40° (122°F)

Ordering Guide

Example: RD15W6IN5CCT-BF

Fixture Type	Size & Wattage	Color Temp.	Voltage	Trim
RD	15W6IN=15Watt 6Inch	5CCT = 27/30/35/40/50K (Color Temperature Adjustable)	Blank = 120V	BF= White baffle trim BK = Black BN= Brush nickel BR = Bronze



RD Series

5CCT Recessed Downlight

Fixture Type:

Project Name:

Location:

Date:

Product Information

2700K			3000K		3500K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
15W	969lm	64lm/W	1035lm	69lm/W	1110lm	74lm/W	1158lm	77lm/W	1093lm	72lm/W

Accessories



E26 Adapter
Included



Brushed nickel



Black



Bronze

