

DD4 Series

LED 5CCT 4"/6"/8" Disk Downlight

Fixture Type:

Project Name:

Location:



Date:

Features

- 4"/6"/8" LED disk downlight
- Diffused polycarbonate lens controls direct glare from the LEDs
- Simple snap in installation for J-box
- Die-cast aluminum construction with a powder coat paint white finish
- Surface mounts to a standard junction box
- Retrofit into an existing recessed can
- Selectable color temperature 5CCT : 2700/3000/3500/4000/5000K
- Suitable for wet location



Dimensions

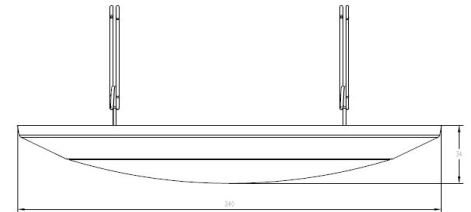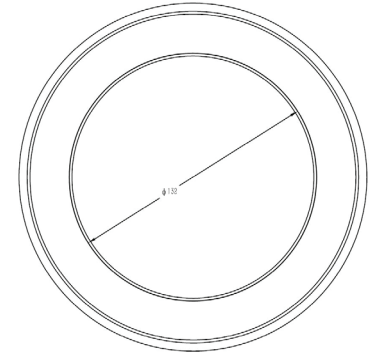

L1	6"	11"
	1.34"	1.34"



Product Performance Standard

Size	4"/6"/8"	Power Factor	90%
Weight	2lb	Life Span	50,000 Hrs
Mounting	Surface mount	Dimmable	Triac dimmable
Color Temp	5CCT	Efficacy	up to 86 lm/W
CRI	90	Warranty	5 Years
Input Voltage	120V	Ambient Operation Temperature	-15C° (-4°F) ~ 40° (104°F)

Ordering Guide

Example: DD4-15W6IN5CCT

Fixture Type	Size & Wattage	Color Temp.	Voltage	¹ Finish (Trim)
DD4	10W4IN=10Watt4Inch 15W6IN=15Watt6Inch 18W8IN=18Watt8Inch	5CCT = 27K/30K/40K/50K/57K (Color Temperature Adjustable)	Blank = 120V	Blank = White BN = Brushed Nickel BK = Black

Note: 1. Standard finish is white, black and brushed nickel finish require 200 MOQ.





DD4 Series

LED 5CCT 4"/6"/8" Disk Downlight with motion sensor

Fixture Type:

Project Name:

Location:

Date:

Product Information

5000K

WATTAGE	LUMEN	EFFICACY
10W	700lm	70lm/W
15W	1150lm	76lm/W
18W	1550lm	86lm/W





DD4 Series

LED 5CCT 4"/6"/8" Disk Downlight with motion sensor


Fixture Type:

Project Name:

Location:

Date:

Wiring Diagram

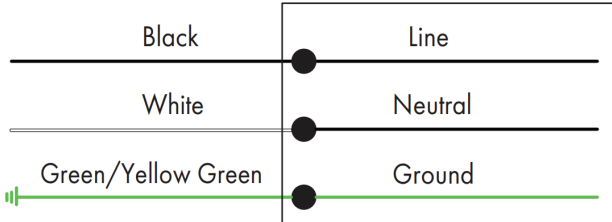

Scan the QR code or visit www.lironlighting.com/product/DD for the complete luminaire installation guide.

NOTE:
