

DD4 Series LED 5CCT 4"/6"/8" Disk Downlight

Features

- 4"/6"/8" LED disk downlight
- Diffused polycarbonate lens controls direct glare from the LEDs
- Simple snap in installation for J-box
- Die-cast aluminum construction with a powder coat paint finish
- Surface mounts to a standard junction box
- Retrofit into an existing recessed can
- Selectable color temperature 5CCT :
- 2700/3000/3500/4000/5000K
- Suitable for wet location



Product Performance Standard

Size	4"/6″/8"	Power Factor	90%
Weight	2lb	Life Span	50,000 Hrs
Mounting	Surface mount/retrofit	Dimmable	Triac dimmable
Color Temp	5CCT	Efficacy	up to 80 lm/W
CRI	90	Warranty	5 Years
Input Voltage	120V	Ambient Operation Temperature	-15C° (-4°F) ~ 40° (104°F)


Fixture Type:

Dimensions

Project Name:

Location:


Date:



L1	6″]]″
	1.34″	1.34″

Ordering Guide

Example: DD4-15W6IN5CCT

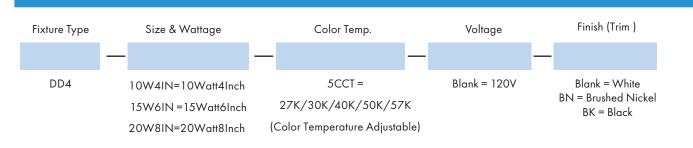









DD4 Series

LED 5CCT 4"/6"/8" Disk Downlight with motion sensor

Fixture Type:

Project Name:

Location:

Date:

Product Information


	5000K	
WATTAGE	LUMEN	EFFICACY
10W	650 lm	65lm/W
15W	1100 lm	73lm/W
20W	1 <i>5</i> 00lm	75lm/W





DD4 Series LED 5CCT 4"/6"/8" Disk Downlight with motion sensor

Wiring Diagram



Fixture Type:

Project Name:

Location:

Date:



Scan the QR code or visit www.lironlighting.com/product/DD for the complete luminare installation guide.

NOTE:

