

# DD4 Series

LED 5CCT 4"/6"/8" Disk Downlight

**Fixture Type:**

**Project Name:**

**Location:**



**Date:**

## Features

- 4"/6"/8" LED disk downlight
- Diffused polycarbonate lens controls direct glare from the LEDs
- Simple snap in installation for J-box
- Die-cast aluminum construction with a powder coat paint white finish
- Surface mounts to a standard junction box
- Retrofit into an existing recessed can
- Selectable color temperature 5CCT : 2700/3000/3500/4000/5000K
- Suitable for wet location



## Dimensions

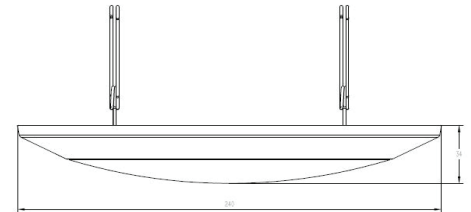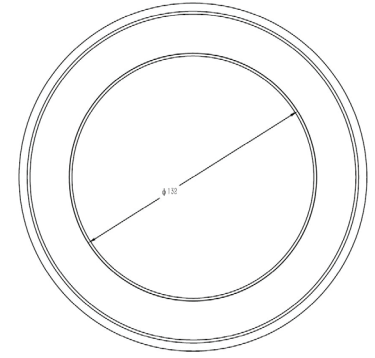

L1	6"	11"
	1.34"	1.34"



## Product Performance Standard

<b>Size</b>	4"/6"/8"	<b>Power Factor</b>	90%
<b>Weight</b>	2lb	<b>Life Span</b>	50,000 Hrs
<b>Mounting</b>	Surface mount	<b>Dimmable</b>	Triac dimmable
<b>Color Temp</b>	5CCT	<b>Efficacy</b>	up to 86 lm/W
<b>CRI</b>	90	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120V	<b>Ambient Operation Temperature</b>	-15C° (-4°F) ~ 40° (104°F)

## Ordering Guide

Example: DD4-15W6IN5CCT

Fixture Type	Size & Wattage	Color Temp.	Voltage	<sup>1</sup> Finish (Trim )
DD4	10W4IN=10Watt4Inch 15W6IN=15Watt6Inch 18W8IN=18Watt8Inch	5CCT = 27K/30K/40K/50K/57K (Color Temperature Adjustable)	Blank = 120V	Blank = White BN = Brushed Nickel BK = Black

Note: 1. Standard finish is white, black and brushed nickel finish require 200 MOQ.



# DD4 Series

LED 5CCT 4"/6"/8" Disk Downlight

Fixture Type:

Project Name:

Location:

Date:

## Product Information

5000K

WATTAGE	LUMEN	EFFICACY
10W	700lm	70lm/W
15W	1150 lm	76lm/W
18W	1550lm	86lm/W