

WF 4/6 Series
5CCT Ultra Slim Recessed Downlight

Fixture Type: Project Name: Location: Date:

Features

- 0.39" Ultra thin canless recessed lights designed for the new construction
- Housing and J-box not required; easy install spring clips firmly secure recessed LED lights in ceiling
- Selectable 5CCT from 2700K to 5000K
- Durable die cast aluminum alloy for optimal heat dissipation
- Compatible with many dimmers that dimming from 100% to 10%
- White finish
- Wet location rated
















Product Performance Standard


Size	4"/6"	Power Factor	90%		
Weight	2lb	Life Span	50,000 Hrs		
Mounting	Recessed Mount	Dimmable	Traic dimmable		
Color Temp	5CCT	Efficacy	up to 80 lm/W		
CRI	90	Warranty	5 Years		
Input Voltage	120V	Ambient Operation Temperature	-15°C (-4°F) ~ 40° C(104°F)		

Dimensions





Ordering Guide Example: WF4-5CCT

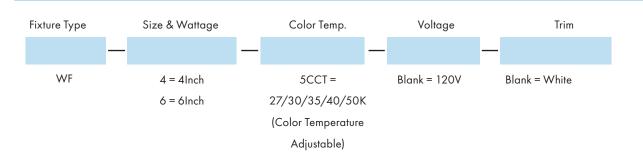



WF 4/6 Series
5CCT Ultra Slim Recessed Downlight

Fixture Type:					
Project Name:					
Location:					
Date:					

Product Information

	2700K		3000K		3500K		4000K		5000K	
Size & Wattage	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
4Inch 9W	562lm	62lm/W	602lm	66lm/W	613lm	68lm/W	637lm	70lm/W	644lm	71lm/W
6Inch 12W	936lm	78lm/W	996lm	86lm/W	996lm	86lm/W	1038lm	86lm/W	1038lm	86lm/W

6 Inch: Easily flip the switch for desired CCT





