

SP1 Series

LED Low Bay/Strip Light

Fixture Type:
Project Name:
Location:
Date:

Features

- LED 4' and 8' Low Bay/strip light
- Aluminum housing with white coat finish
- Frosted white diffuser lens
- Wattage selectable 4' 30/35/40W or 8' 60/70/80W
- 3CCT color temperature adjustable 3500K/4000K/5000K
- 155 lumen per watt
- Universal 100-277V input voltage
- Standard surface mount, optional pendant mount (hanging cable sold separately)
- Optional motion sensor and emergency battery backup




Product Performance Standard

Size	4FT/8FT	Dimming	0-10V Dimming
Weight	8 lb	Life Span	50,000 Hrs
Color Temp	3CCT 35/40/50K	Efficacy	155 lm/W
CRI	80	Warranty	5 Years
Input Voltage	100-277V	Ambient Operation Temperature	-13°C (-4°F) ~ 40° (104°F)

Ordering Guide

Example: SP1 -8FT UW 3CCT

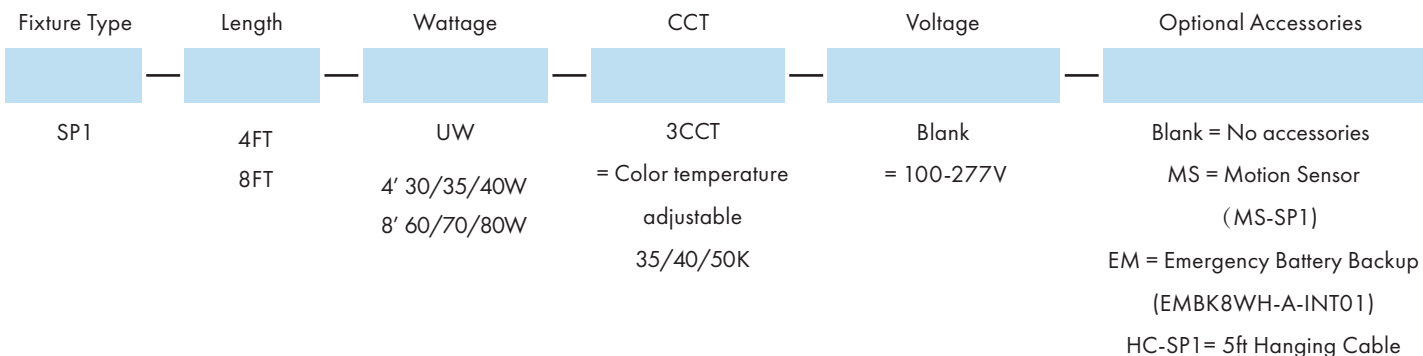

SP1 Series

LED Low Bay/Strip Light

Fixture Type:

Project Name:

Location:

Date:

Product Information

5000K				
LENGTH	WATTAGE	LUMEN	EFFICACY	
4'	30W	4,650lm	155lm/W	
	35W	5,425lm	155lm/W	
	40W	6,200lm	155lm/W	

5000K				
LENGTH	WATTAGE	LUMEN	EFFICACY	
8'	60W	9,300lm	155lm/W	
	70W	10,850lm	155lm/W	
	80W	12,400lm	155lm/W	

Optional Accessories



Motion Sensor

- SKU: MS-SP1
- Internal motion sensor is pre-installed by request



Emergency Battery Backup

- SKU: EMBK8WH-A-INT01
- Internal battery backup is pre-installed by request
- Delivery 1000 lumen for 90 minutes emergency operation



Alignment Bracket

- Bracket to connect two fixtures together

For the accessories detail, please visit www.lironlighting.com/product_categories/add-on-accessories



SP1 Series

LED Low Bay/Strip Light


Fixture Type:

Project Name:

Location:


Date:

Dimensions

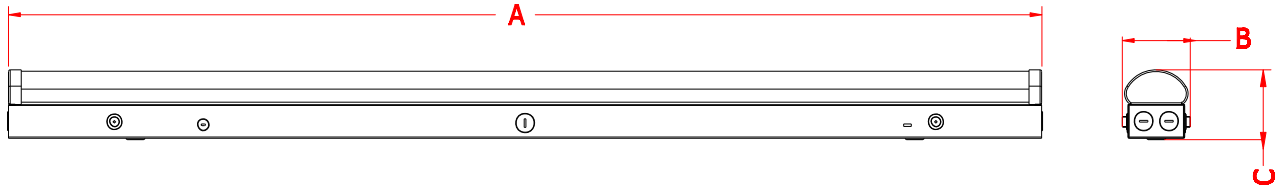

Mode	size	A (inch)(mm)	B (inch)(mm)	C (inch)(mm)
SP1	4FT	48.03" 1220mm	3.28" 82mm	3.28" 82mm
SP1	8FT	95.98" 2438mm	3.28" 82mm	3.28" 82mm

Wiring Diagram

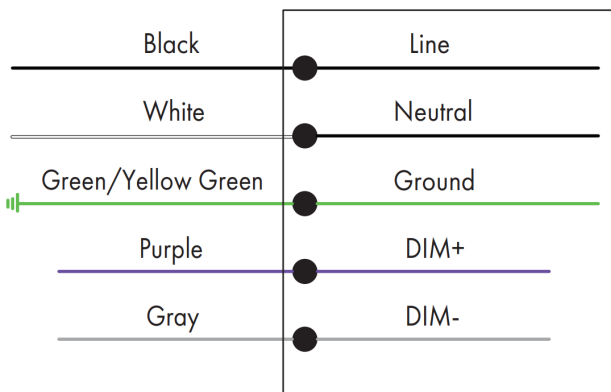

Scan the QR code or visit www.lironlighting.com/product/SP3 for the complete installation guide.