

# VT4 Series

LED Vapor Tight Wattage Selectable & 3CCT

**Fixture Type:**

**Project Name**

**Location:**


**Date:**

## Features

- 2FT wattage selectable and 3CCT vapor tight.
- High impact resistant acrylic prismatic lenses attached with stainless steel clips, enhancing the airtight seal.
- Wattage selectable 15W/20W/25W
- Color temperature adjustable 3000K/4000K/5000K
- 0-10V dimmable
- 3/4" knockouts hole for easier installation
- Weather proof fixture - IP65 Rated suitable for wet location
- Optional accessories internal motion sensor and internal emergency battery backup




## Dimensions

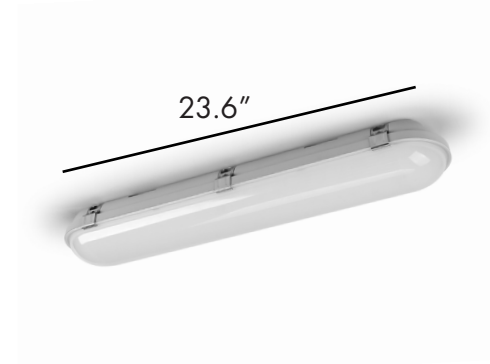

## Product Performance Standard

<b>Size</b>	23.6" x 5" x 3.54"	<b>Power Factor</b>	90%
<b>Weight</b>	4 lb	<b>Life Span</b>	50,000 Hrs
<b>IP Rate</b>	IP65	<b>Dimmable</b>	0-10V Dimmable
<b>Color Temp</b>	3CCT	<b>Efficacy</b>	Up to 130 lm/W
<b>CRI</b>	70	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120-277V	<b>Ambient Operation Temperature</b>	-20C° (-4°F) ~ 40C° (104°F)

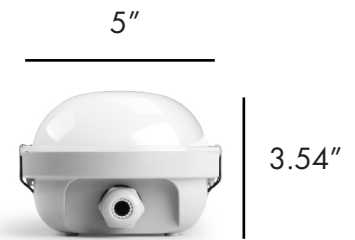

## Ordering Guide

Example: VT4-2FTUW3CCT-25W

Fixture Type	Length	Wattage	3CCT	Voltage	Wattage Options	Optional Accessories
VT4	2FT = 2 ft	UW = Wattage Selectable	3CCT = Color Temperature Selectable	Blank = 120-277V	25W = Maximum Wattage	Blank = No accessories MS = Motion Sensor (BL-810MW-IN) EM = Emergency Battery Backup (EMBK8WL-S-INT01)

Last updated: 8-7-2023



# VT4 Series

LED Vapor Tight Wattage Selectable & 3CCT

**Fixture Type:**

**Project Name**

**Location:**

**Date:**

## Product Information

2'		3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	EFFICACY
25W	3175lm	127lm/W	3225lm	129lm/W	3250lm	130lm/W	130lm/W
20W	2540lm	127lm/W	2580lm	129lm/W	2600lm	130lm/W	130lm/W
15W	1905lm	127lm/W	1935lm	129lm/W	1950lm	130lm/W	130lm/W

## Optional Accessories



### Internal Motion Sensor

**SKU:BL-810MW-IN**

- Internal motion sensor is field installed or pre-installed by request



### Internal Emergency Battery Backup

**SKU:EMBK8WL-S-INT01**

- External battery backup is pre-installed by request
- Delivery 1040 lumen for 90 minutes emergency operation


For the accessories detail, please visit [www.lironlighting.com/product\\_categories/add-on-accessories](http://www.lironlighting.com/product_categories/add-on-accessories)

# VT4 Series





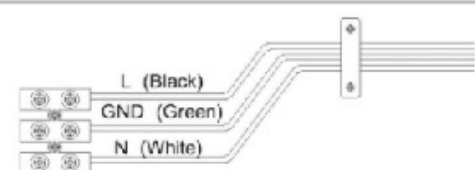
LED Vapor Tight Wattage Selectable & 3CCT

<b>Fixture Type:</b>
<b>Project Name</b>
<b>Location:</b>
<b>Date:</b>

## Wiring Diagram

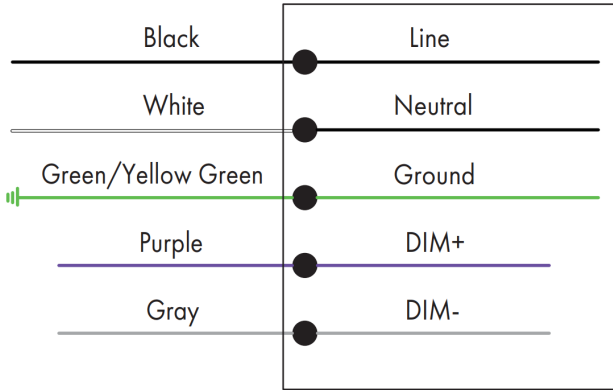

## Installation Instructions

 <p><b>1. Drill four holes into the screw locations on the ceiling.</b></p>	 <p><b>2. Fix the plastic anchor into the ceiling, insert the screws into the metal clamp, then fix the screws into the anchor</b></p>
 <p><b>3. Fix the fixture into the clamps shown as above</b></p>	 <p><b>4. Complete the installation as the above picture shown</b></p>
<h3>Wiring</h3> <p>L (Live Line) GND (Ground) N (Null Line)</p> 	

**Warning: Turn off the power before installation**

