

GL2 Series LED GROW LIGHT

Fixture Type:
Project Name
Location:
Date:

Features

The GL2 series LED grow light features a full-spectrum light, similar to the sun to provide high eficient lighting from-seeding to harvest. It is an ideal choice for hobbyists and commercial growers. GL2 series is specially designed for commercial indoor horizontal and vertical growing environments, saving electric cost, releasing maximum PAR e ciency & uniform lighting distribution with great yield. The 3 times folding structure design makes the growing light more fexible, smallest package, and more simple to install, just plug and play. Single knob+RJ14 port for dimmer and timer. Multi-light connection with unified dimming is especially beneficial for large areas of indoor growing and commercial planting.









1000W


1200W

Product Performance Standard

AC Input	1000W/10 bars or 1200W/12bars	IP Rating	IP65	
PPE	2.8 umol/J	Beam Angle	120 degree	
PPF	2800 umol/s/3360umol/s	Mounting Height	6"-48"	
Dimming	0-10V+RJ14 Controller	THD	<10%	
Ratio	Full Spectrum;red white+IR	Warranty	5 Years	
Input Voltage	120-277V/277-480V	Ambient Operation Temperature	-20C°~ 40C°	

Ordering Guide

Example: GL2-1000W

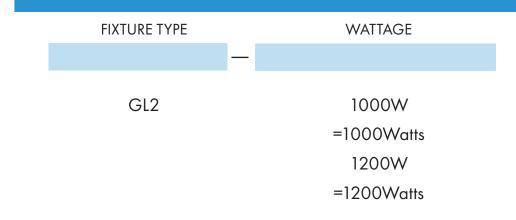

GL2- Rev 06-26-2024



GL2 SeriesLED GROW LIGHT


Fixture	Type:

Project Name

Location:

Date:


Photometry

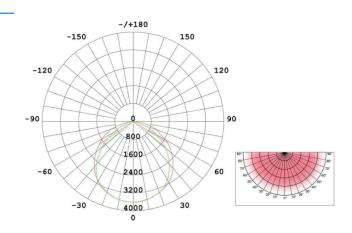

•					1800) mm					-	-
378		604		634	706	706	634		604		378	A
455											455	
530		724		768	870	870	768		724		530	
587											587	8
624	809	855	880	890	900	900	890	880	855	809	624	1200mm
587											587	1
530		724		768	870	870	768		724		530	
455											455	
378		604		634	706	706	634		604		378	l

24" 2ft 60cm

Dimensions

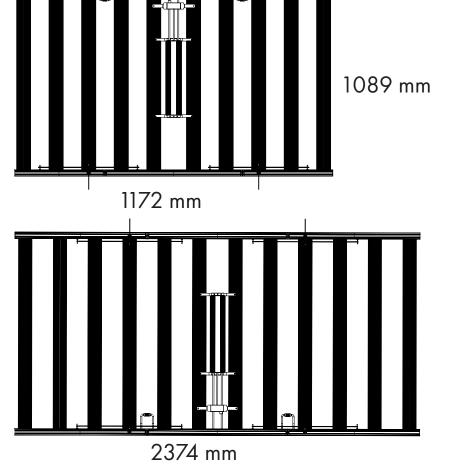

1089 mm

UNIT: mm



GL2 Series

LED GROW LIGHT


Fixture Type:


Project Name

Location:

Date:


Full Specturm

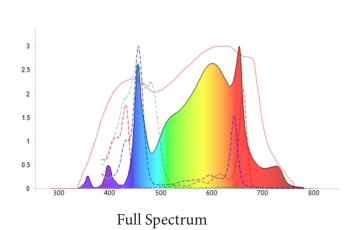



10-bar aluminum design for efficient heat disipated

Installation

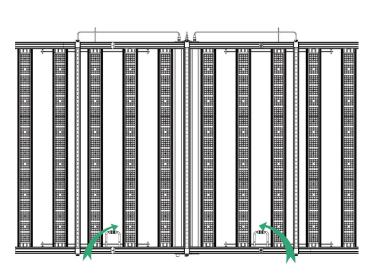

1. Unfold the light fixture.



1. Hang the light, plug and play.