

ULFL1 Series

Wattage Selectable & 3CCT Flood Light

Fixture Type:
Project Name:
Location:
Date:

Features

- Wattage selectable 33W/50W/67W/90W or 52W/71W/98W/120W
- Adjustable color temperature 3000K/4000K/5000K
- One piece die-cast aluminum housing with tempered glass lens
- NEMA Beam spread of 7H x 7V
- Integrated visor that cover can reduce glare.
- Photocell pre-installed, shorting cap come with it for disable the photocell function.
- Two mounting options 1/2" knuckle mount and trunnion mount for the small & medium size Slipfitter and trunnion mount for the large size.
- Suitable for wet locations.



Large 90W/120W

Product Performance Standard

Nema Type:	7H x 7V	Power Factor	90%
Weight	8LB	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	3CCT 30/40/50K	Efficacy	Up to 150 lm/W
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40°C (-40°F) ~ 40° (104°F)

Ordering Guide

Example: ULFL1-UW3CCT-SP-90W-PC

Fixture Type	Wattage	Color Temp.	Mounting	Max Wattage	Finish	Accessories
ULFL1	UW Wattage Selectable	3CCT 3000K/4000K/5000K	SP =Slipfitter YK =York Mount	90W = Maximum Wattage 90W 120W = Maximum Wattage 120W	Blank = Dark Bronze	PC = Photocell (-WPPC) (Included)

Updated: 1-11-2024



ULFL1 Series

Wattage Selectable & 3CCT Flood Light

Fixture Type:

Project Name:

Location:

Date:

Mounting Options:




York Mount



Slipfitter Mount

(90W/120W)

Dimension:

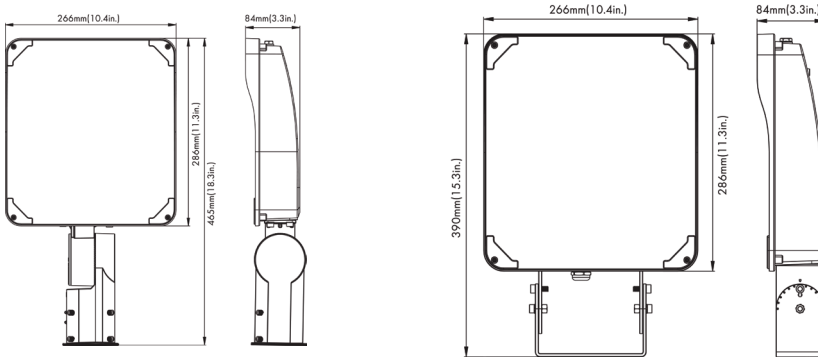

90W/120W

Performance Data

ULFL1-UW3CCT-90W

	3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
90W	13100lm	145lm/W	13200lm	146lm/W	13500lm	150lm/W
67W	9800lm	146lm/W	9850lm	147lm/W	10535lm	157lm/W
50W	7900lm	158lm/W	8000lm	160lm/W	8144lm	162lm/W
33W	5100lm	154lm/W	5200lm	157lm/W	5490lm	166m/W



ULFL1 Series

Wattage Selecatable & 3CCT Flood Light

Fixture Type:
Project Name:
Location:
Date:

ULFL1-UW3CCT-120W

WATTAGE	3000K		4000K		5000K	
	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
120W	17500lm	146lm/W	17800lm	148lm/W	18000lm	150lm/W
98W	14800lm	150lm/W	14900lm	152lm/W	15119lm	154lm/W
71W	10800lm	152lm/W	11000lm	154lm/W	11206lm	157lm/W
52W	8480lm	162lm/W	8500lm	163lm/W	8581lm	165m/W



Photocell pre-installed, come with shorting cap to disable photocell function.

High reflective white reflector and tempered glass. Beam spread 7Hx7V NEMA type.

One piece die cast aluminum housing with dark bronze finish

Yoke and slipfitter mount onle suitable for 90W/120W.

