

UFL1M Series

Wattage Selectable & 3CCT Flood Light

Fixture Type:
Project Name:
Location:
Date:

Features

- Wattage selectable 27W/41W/54W/65W
- Adjustable color temperature 3000K/4000K/5000K
- One piece die-cast aluminum housing with tempered glass lens
- NEMA Beam spread of 7H x 7V
- Integrated visor that cover can reduce glare.
- Photocell pre-installed, shorting cap come with it for disable the photocell function.
- Two mounting options 1/2" knuckle mount and trunnion mount for the small & medium size Slipfitter and trunnion mount for the large size.
- Suitable for wet locations.



Medium 65W




Product Performance Standard

Nema Type:	7H x 7V	Power Factor	90%
Weight	7LB	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	3CCT 30/40/50K	Efficacy	Up to 150 lm/W
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 40° (104°F)

Ordering Guide

Example: UMFL1-U0W3CCT-KN-65W-PC

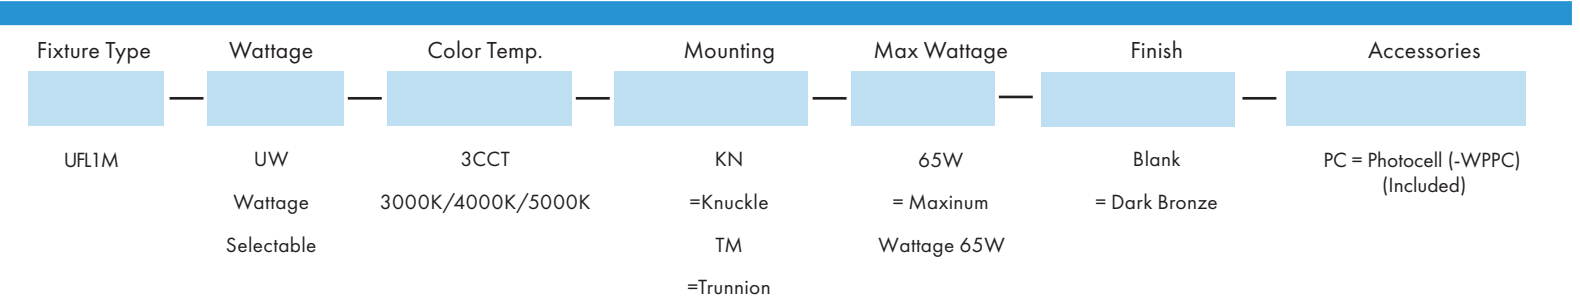

UFL1 M Series

Wattage Selectable & 3CCT Flood Light

Fixture Type:
Project Name:
Location:
Date:

Mounting Options:




1/2" Knuckle Mount



Trunnion Mount

(65W)

Dimension:

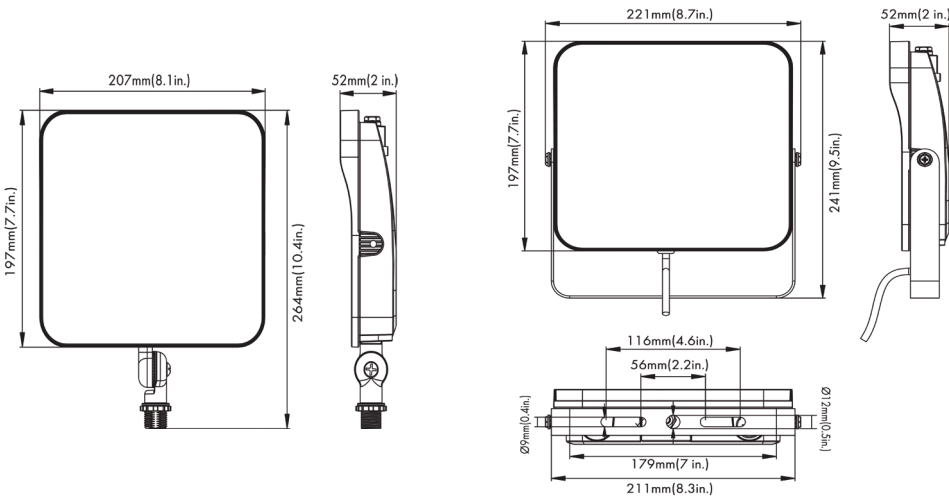

65W

Performance Data

UMFL1-UW3CCT-65W

	3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
65W	9280lm	142lm/W	9300lm	143lm/W	9400lm	144lm/W
54W	7650lm	141lm/W	7700lm	142lm/W	7824lm	144m/W
41W	5790lm	141lm/W	5820lm	141lm/W	5937lm	144m/W
27W	3750lm	140lm/W	3800lm	140lm/W	3963m	146lm/W

UFL1 M Series

Wattage Selectable & 3CCT Flood Light

Fixture Type:

Project Name:

Location:

Date:



High reflective white reflector and tempered glass. Beam spread 7Hx7V NEMA type.

Photocell pre-installed, come with shorting cap to disable photocell function.

One piece die cast aluminum housing with dark bronze finish

Knuckle and trunnion mount for 65W

