

USFL1S Series

Wattage Selectable & 3CCT Flood Light

Fixture Type:
Project Name:
Location:
Date:

Features

- Wattage selectable 11W/15W/20W/27W
- Adjustable color temperature 3000K/4000K/5000K
- One piece die-cast aluminum housing with tempered glass lens
- NEMA Beam spread of 7H x 7V
- Integrated visor that can reduce glare.
- Photocell pre-installed, shorting cap come with it for disable the photocell function.
- Two mounting options 1/2" knuckle mount and trunnion mount for the small & medium size Slipfitter and trunnion mount for the large size.
- Suitable for wet locations.



SMALL 27W



Product Performance Standard

Nema Type:	7H x 7V	Power Factor	90%
Weight	3LB	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	3CCT 30/40/50K	Efficacy	Up to 150 lm/W
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 40° (104°F)

Ordering Guide

Example: USFL1 UW 3CCT TM 27W PC

Fixture Type	Wattage	Color Temp.	Mounting	Max Wattage	Finish	Accessories
UFL1S	UW Wattage Selectable	3CCT 3000K/4000K/5000K	KN =Knuckle TM =Trunnion	27W = Maximum Wattage 27W	Blank = Dark Bronze	PC = Photocell (-WPPC) (Included)

USFL1S Series

Wattage Selectable & 3CCT Flood Light

Fixture Type:
Project Name:
Location:
Date:

Mounting Options:





1/2" Knuckle Mount



Trunnion Mount

(15W/27W)

Dimension:

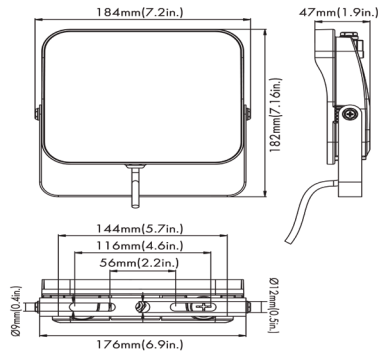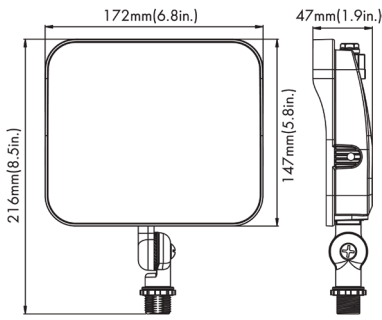

Performance Data

UFL1S-UW3CCT-27W

	3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
27W	3490lm	129lm/W	3500lm	129lm/W	3600lm	133lm/W
20W	2780lm	139lm/W	2800lm	140lm/W	2856lm	149lm/W
15W	2175lm	145lm/W	2200lm	146lm/W	2234lm	145lm/W
11W	1640lm	149lm/W	1650lm	150lm/W	1690lm	157lm/W

UFL1S Series

Wattage Seleccionable & 3CCT Flood Light

Fixture Type:

Project Name:

Location:

Date:



Photocell pre-installed, come with shorting cap to disable photocell function.

High reflective white reflector and tempered glass. Beam spread 7Hx7V NEMA type.

One piece die cast aluminum housing with dark bronze finish

Knuckle and trunion mount for 27W

