

# UMFL1 Series

Wattage Selectable & 3CCT Flood Light

<b>Fixture Type:</b>
<b>Project Name:</b>
<b>Location:</b>
<b>Date:</b>

## Features

- Wattage selectable 14W/21W/29W/40W or 27W/41W/54W/65W
- Adjustable color temperature 3000K/4000K/5000K
- One piece die-cast aluminum housing with tempered glass lens
- NEMA Beam spread of 7H x 7V
- Integrated visor that cover can reduce glare.
- Photocell pre-installed, shorting cap come with it for disable the photocell function.
- Two mounting options 1/2" knuckle mount and trunnion mount for the small & medium size Slipfitter and trunnion mount for the large size.
- Suitable for wet locations.



Medium 40W/65W




## Product Performance Standard

<b>Nema Type:</b>	7H x 7V	<b>Power Factor</b>	90%
<b>Weight</b>	7LB	<b>Life Span</b>	50,000 Hrs
<b>IP Rate</b>	IP65	<b>Dimmable</b>	1-10V Dimmable
<b>Color Temp</b>	3CCT 30/40/50K	<b>Efficacy</b>	Up to 150 lm/W
<b>CRI</b>	70	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120-277V	<b>Ambient Operation Temperature</b>	-40C° (-40°F) ~ 40° (104°F)

## Ordering Guide

Example: UMFL1-U0W3CCT-KN-40W-PC

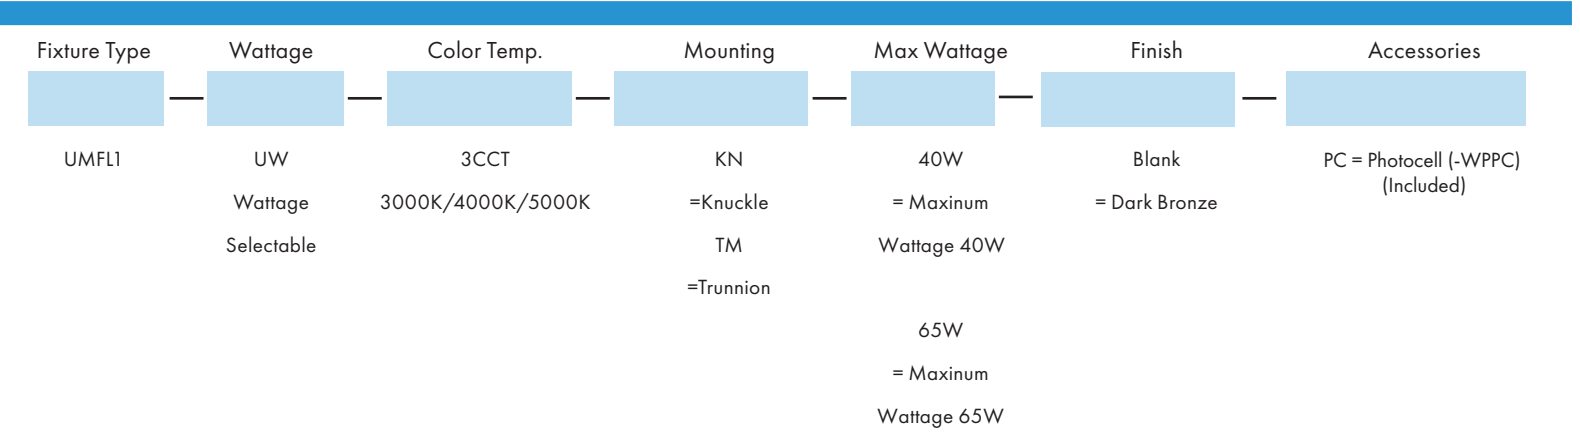

Updated: 1-11-2024

# UMFL1 Series

Wattage Selectable & 3CCT Flood Light

<b>Fixture Type:</b>
<b>Project Name:</b>
<b>Location:</b>
<b>Date:</b>

## Mounting Options:




1/2" Knuckle Mount



Trunnion Mount

(40W/65W)

## Dimension:

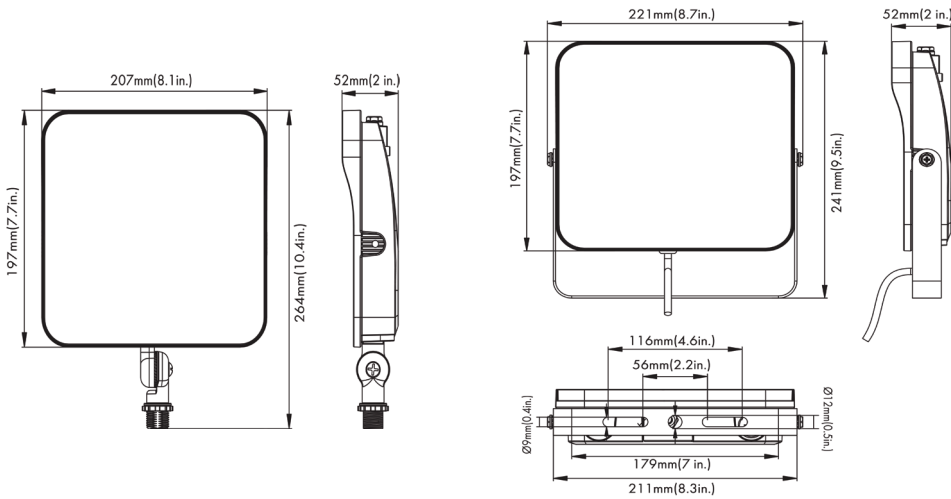

40W/65W

## Performance Data

UMFL1-UW3CCT-40W

	3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
40W	5650lm	137lm/W	5700lm	142lm/W	5800lm	145lm/W
30W	4380lm	146lm/W	4400lm	146lm/W	4542lm	151lm/W
21W	3200lm	152lm/W	3250lm	154lm/W	3356lm	159lm/W
14W	2250lm	160lm/W	2280lm	162lm/W	2327lm	166lm/W



# UMFL1 Series

Wattage Selectable & 3CCT Flood Light

<b>Fixture Type:</b>
<b>Project Name:</b>
<b>Location:</b>
<b>Date:</b>

UMFL1-UW3CCT-65W

WATTAGE	3000K		4000K		5000K	
	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
65W	9280lm	142lm/W	9300lm	143lm/W	9400lm	144lm/W
54W	7650lm	141lm/W	7700lm	142lm/W	7824lm	144m/W
41W	5790lm	141lm/W	5820lm	141lm/W	5937lm	144m/W
27W	3750lm	140lm/W	3800lm	140lm/W	3963m	146lm/W



Photocell pre-installed, come with shorting cap to disable photocell function.

High reflective white reflector and tempered glass. Beam spread 7Hx7V NEMA type.

One piece die cast aluminum housing with dark bronze finish

Knuckle and trunnion mount for- 15W/27W/40W/65W

