

UMFL1 Series

Wattage Selectable & 3CCT Flood Light

Fixture Type:

Project Name:

Location:

Date:

Features

- Wattage selectable 14W/21W/29W/40W or 27W/41W/54W/65W
- Adjustable color temperature 3000K/4000K/5000K
- One piece die-cast aluminum housing with tempered glass lens
- NEMA Beam spread of 7H x 7V
- Integrated visor that cover can reduce glare.
- Photocell pre-installed, shorting cap come with it for disable the photocell function.
- Two mounting options 1/2" knuckle mount and trunnion mount for the small & medium size Slipfitter and trunnion mount for the large size.
- Suitable for wet locations.



Medium 40W/65W



Product Performance Standard

Nema Type:	7H x 7V	Power Factor	90%
Weight	7LB	Life Span	50,000 Hrs
IP Rate	IP65	Dimmable	1-10V Dimmable
Color Temp	3CCT 30/40/50K	Efficacy	Up to 150 lm/W
CRI	70	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 40° (104°F)

Ordering Guide

Example: UMFL1-U0W3CCT-KN-40W

Fixture Type	Wattage	Color Temp.	Mounting	Max Wattage	Finish	Accessories
UMFL1	UW Wattage Selectable	3CCT 3000K/4000K/5000K	KN =Knuckle TM =Trunnion	40W = Maximum Wattage 15W 65W = Maximum Wattage 27W	Blank = Dark Bronze ¹ Premium Finish: BK = Black WH = White	PC = Photocell (-WPPC)

Note:1.Premium finish incur on additional cost, contact factory for MOQ and availability.

Updated: 1-11-2024



UMFL1 Series

Wattage Selectable & 3CCT Flood Light

Fixture Type:
Project Name:
Location:
Date:

Mounting Options:




1/2" Knuckle Mount



Trunnion Mount

(40W/65W)

Dimension:

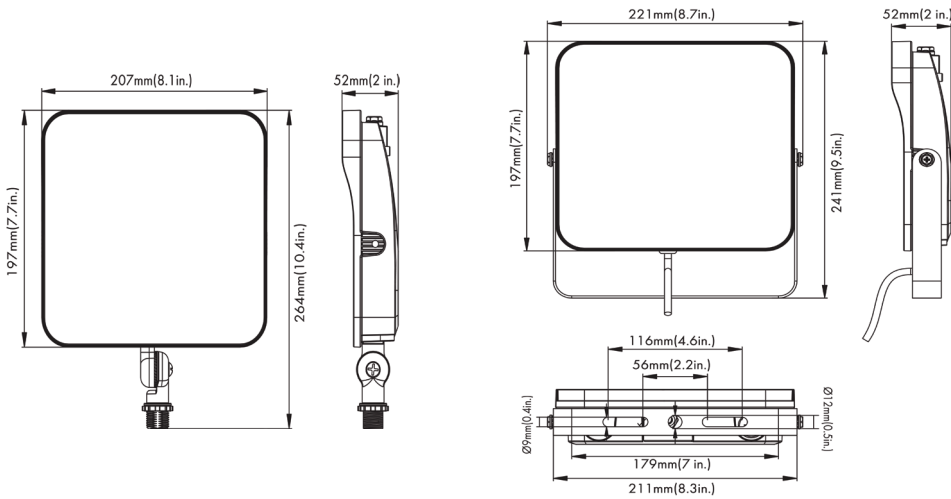

40W/65W

Performance Data

UMFL1-UW3CCT-40W

	3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
40W	5650lm	137lm/W	5700lm	142lm/W	5800lm	145lm/W
30W	4380lm	146lm/W	4400lm	146lm/W	4542lm	151lm/W
21W	3200lm	152lm/W	3250lm	154lm/W	3356lm	159lm/W
14W	2250lm	160lm/W	2280lm	162lm/W	2327lm	166lm/W



UMFL1 Series

Wattage Selecatable & 3CCT Flood Light

Fixture Type:
Project Name:
Location:
Date:

UMFL1-UW3CCT-65W

WATTAGE	3000K		4000K		5000K	
	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
65W	9280lm	142lm/W	9300lm	143lm/W	9400lm	144lm/W
54W	7650lm	141lm/W	7700lm	142lm/W	7824lm	144m/W
41W	5790lm	141lm/W	5820lm	141lm/W	5937lm	144m/W
27W	3750lm	140lm/W	3800lm	140lm/W	3963m	146lm/W



Photocell pre-installed, come with shorting cap to disable photocell function.

High reflective white reflector and tempered glass. Beam spread 7Hx7V NEMA type.

One piece die cast aluminum housing with dark bronze finish

Knuckle and trunnion mount for- 15W/27W/40W/65W

