

# UMFL1 Series

Wattage Selectable & 3CCT Flood Light

<b>Fixture Type:</b>
<b>Project Name:</b>
<b>Location:</b>
<b>Date:</b>

## Features

- Wattage selectable 14W/21W/29W/40W or 27W/41W/54W/65W
- Adjustable color temperature 3000K/4000K/5000K
- One piece die-cast aluminum housing with tempered glass lens
- NEMA Beam spread of 7H x 7V
- Integrated visor that cover can reduce glare.
- Photocell pre-installed, shorting cap come with it for disable the photocell function.
- Two mounting options 1/2" knuckle mount and trunnion mount for the small & medium size Slipfitter and trunnion mount for the large size.
- Suitable for wet locations.



Medium 40W/65W




## Product Performance Standard

<b>Nema Type:</b>	7H x 7V	<b>Power Factor</b>	90%
<b>Weight</b>	7LB	<b>Life Span</b>	50,000 Hrs
<b>IP Rate</b>	IP65	<b>Dimmable</b>	1-10V Dimmable
<b>Color Temp</b>	3CCT 30/40/50K	<b>Efficacy</b>	Up to 150 lm/W
<b>CRI</b>	70	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120-277V	<b>Ambient Operation Temperature</b>	-40C° (-40°F) ~ 40° (104°F)

## Ordering Guide

Example: UMFL1-U0W3CCT-KN-40W

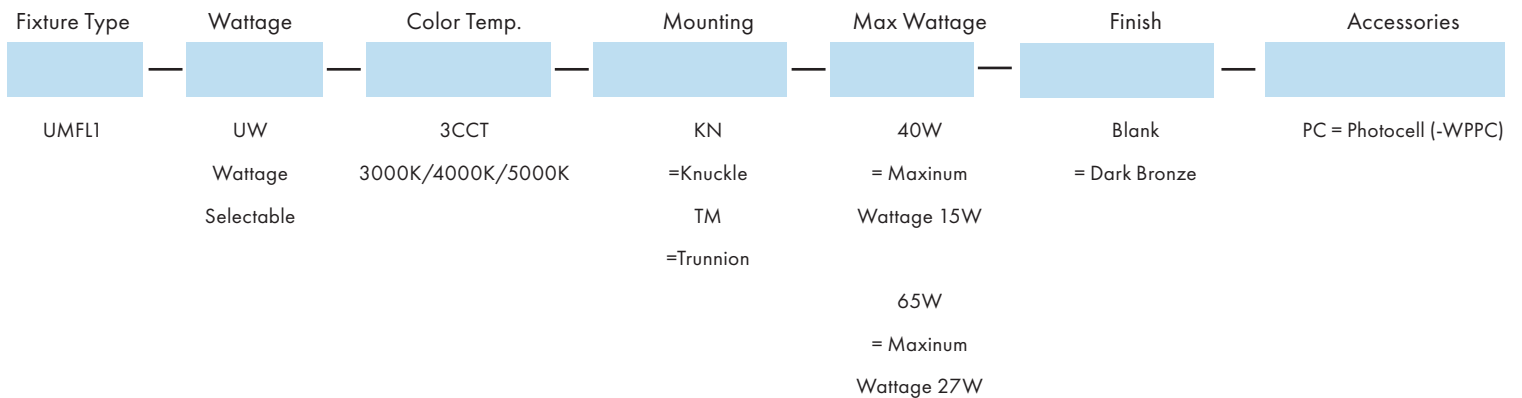

# UMFL1 Series

Wattage Selectable & 3CCT Flood Light

<b>Fixture Type:</b>
<b>Project Name:</b>
<b>Location:</b>
<b>Date:</b>

## Mounting Options:




1/2" Knuckle Mount



Trunnion Mount

(40W/65W)

## Dimension:

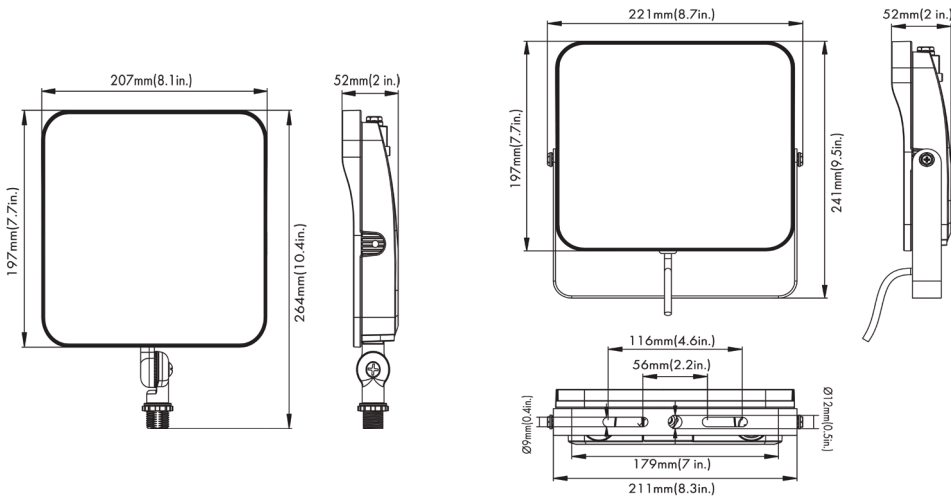

40W/65W

## Performance Data

UMFL1-UW3CCT-40W

	3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
40W	5650lm	137lm/W	5700lm	142lm/W	5800lm	145lm/W
30W	4380lm	146lm/W	4400lm	146lm/W	4542lm	151lm/W
21W	3200lm	152lm/W	3250lm	154lm/W	3356lm	159lm/W
14W	2250lm	160lm/W	2280lm	162lm/W	2327lm	166lm/W



# UMFL1 Series

Wattage Selectable & 3CCT Flood Light

<b>Fixture Type:</b>
<b>Project Name:</b>
<b>Location:</b>
<b>Date:</b>

UMFL1-UW3CCT-65W

WATTAGE	3000K		4000K		5000K	
	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
65W	9280lm	142lm/W	9300lm	143lm/W	9400lm	144lm/W
54W	7650lm	141lm/W	7700lm	142lm/W	7824lm	144m/W
41W	5790lm	141lm/W	5820lm	141lm/W	5937lm	144m/W
27W	3750lm	140lm/W	3800lm	140lm/W	3963m	146lm/W



High reflective white reflector and tempered glass. Beam spread 7Hx7V NEMA type.

Photocell pre-installed, come with shorting cap to disable photocell function.

One piece die cast aluminum housing with dark bronze finish

Knuckle and trunnion mount for- 15W/27W/40W/65W

