

Illuminate your space with a customizable wattage-selectable floodlight featuring three CCT options for the ideal lighting ambiance.







Visit us: www.lironlighting.com






UFL1 Watt. Select. and 3CCT Flood Light

Description

UFL1 strives to offer customers a cost-effective, effective, adaptable, and durable floodlight solution. Its sleek and inconspicuous exterior design seamlessly blends into diverse architectural settings. Offered in four dimensions with a range of lumen options from 15W to 120W, this product attains an impressive efficiency of up to 150lm/W. With a dependable IP65 structural configuration, UFL1 is highly suitable for illuminating various spaces such as courtyards, driveways, structures, advertising boards, and more.



Performance Data:

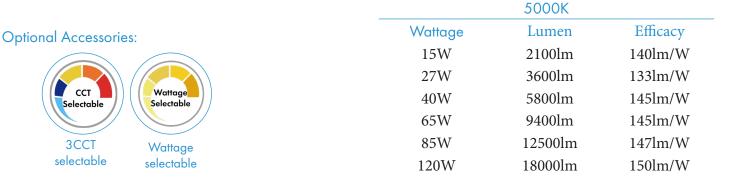



UFL1 Watt. Select. and 3CCT Flood Light

Mounting:

1/2" Knuckle Mount(15W/27W/40W/65W)



Trunnion Mount(15W/27W/40W/65W)

Slipffiter Mount(85W/20W)




Yoke Mount(85W/120W)





Dimensions:




















Photometric:

