


LHB5 INSTALLATION GUIDE




Suspended mount


1. Hook the chain as below pic.

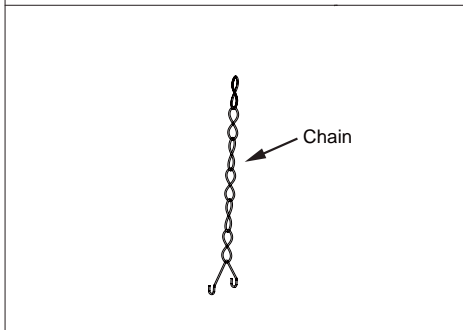


2. Insert the hook into the slotted holes, as shown below.

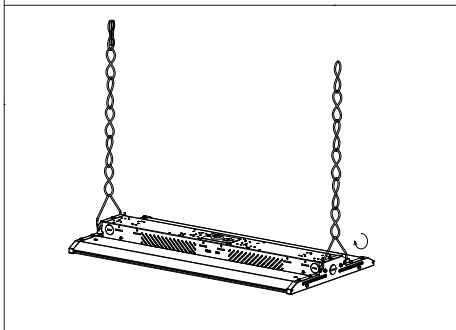

3. Hook up the chain on the ceiling anchor.

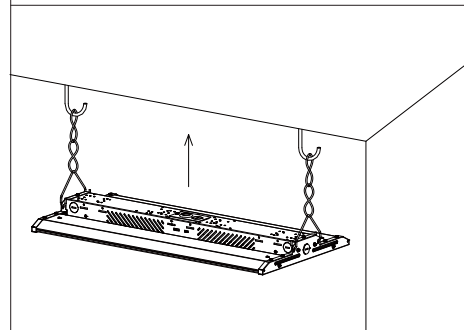


4. Turn off power, and make wiring connections with terminal cap (see wiring instruction below).

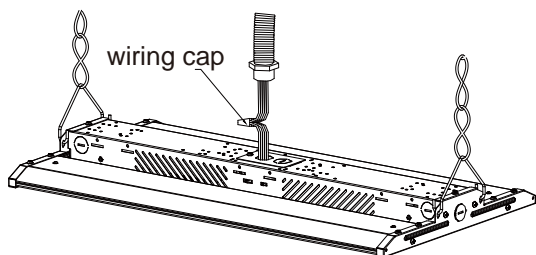


LAMP	Drive Black L	AC L
	White N	AC N
	Green GND	Green GND
	Purple DIM+	Purple DIM+
	Pink DIM-	Pink DIM-


5. Insert the terminal cap and wires into the driver box.

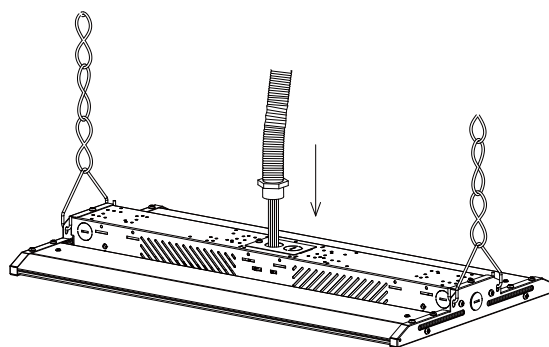

6. Insert the wire terminal joint to the wire entry. Installation completed.

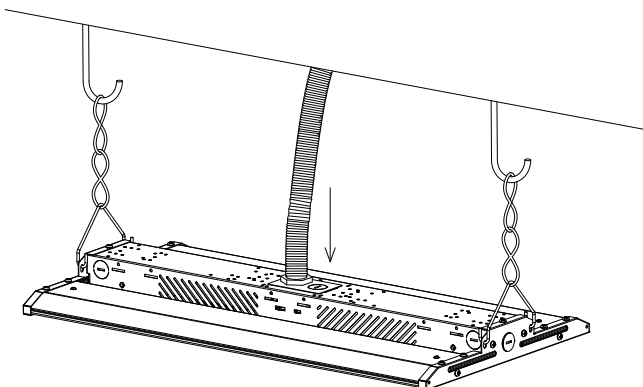

7. If you purchase a lamp with optional color temperature or power functions, adjust the switch to the desired color temperature or power. If there is no adjustable function, there is no switch for this item.


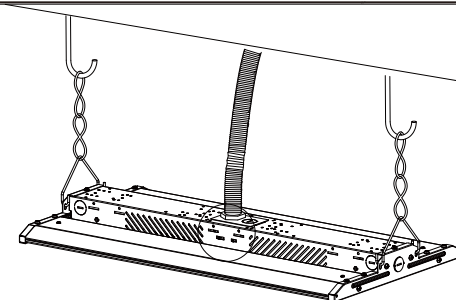


Color temperature optional switch or none


Power selectable switch or none

Surface mounted


1. Drill the alignment holes on the top ceiling, make them match to the holes on mounting bracket.





2. Screw the anchors to holes on ceiling respectively.




3. Screw the bracket to the ceiling.



4. Attach the lamp to the hook fitting.




5. Find the wiring cap from the accessory package and wire it according to the following diagram.

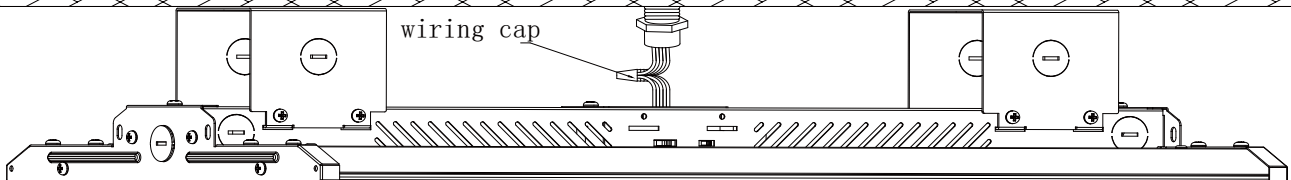

LAMP

Drive Black L	●	AC L
White N	●	AC N
Green GND	●	Green GND
Purple DIM+	●	Purple DIM+
Pink DIM-	●	Pink DIM-

6. If you purchase a lamp with optional color temperature or power functions, adjust the switch to the desired color temperature or power. If there is no adjustable function, there is no switch for this item.

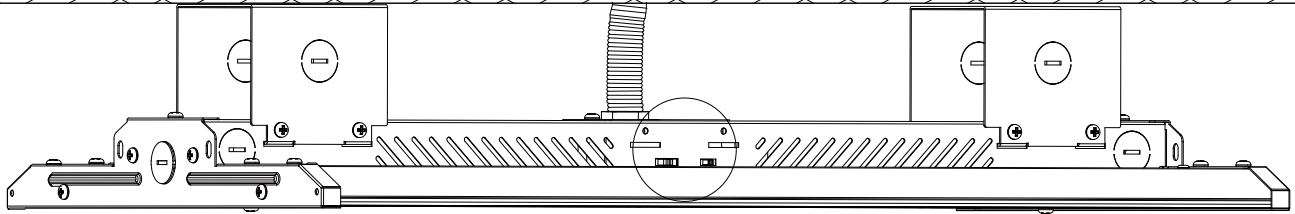


Color temperature
optional switch or none


Power selectable
switch or none

Installation of wire guard:

1. Install the protective net according to the following diagram, using the screws in the accessory package.

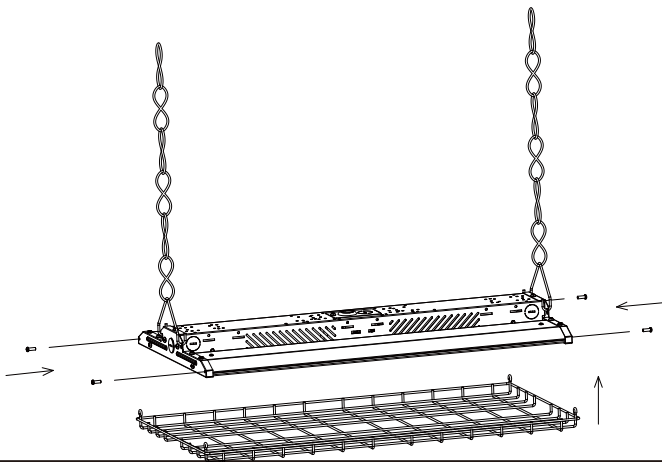


2. Installation completed.

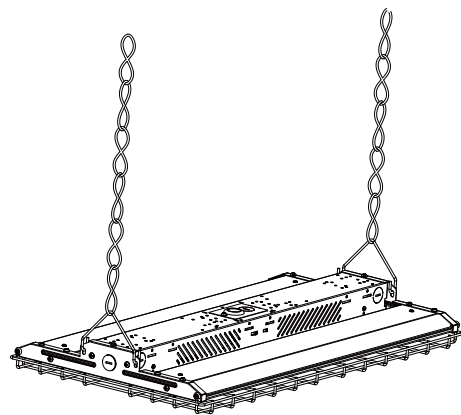

Sensor installation:

1. If the purchased lamp is pre-installed with a sensor base and requires the installation of a sensor, first remove the plug as shown in the following figure.

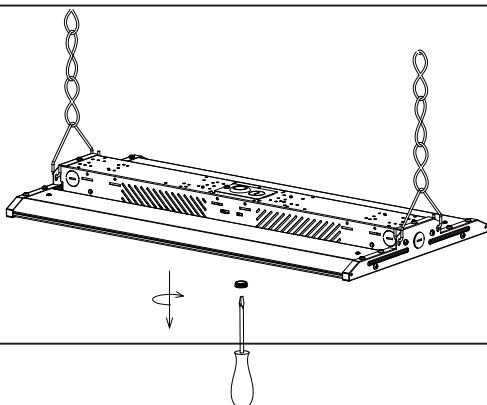

2. Install the sensor as shown in the following figure.

