LiRON LiGHTING

| Fixture Type: |
| --- |
| **Project Name** |
| **Location:** |
| **Date:** |

UCB Series
Undercabinet Bar Light

Features

- Easy and quick installation.
- Low profile slim design for space with low ceiling to floor clearance.
- Available in a range of length 11",14",22".
- 5 color temperature selection.
- 90 CRI renders vibrant colors.
- Compatible with most dimmers down to 5%.
- Multiple lights can be connect together.
- Suitable for damp location.

Dimensions

3.5" 11"
1"
3.5" 14"
3.5" 22"
1"
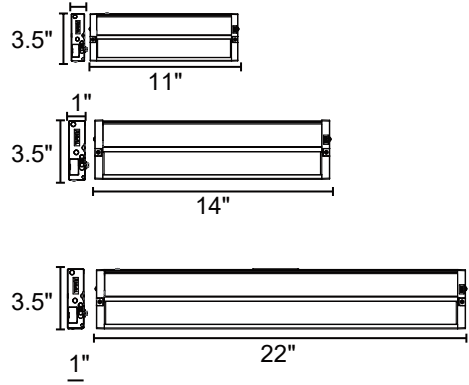
Specification

Material	Aluminum housing	Efficacy	Up to 79 lm/W
Lens	PC lens	LED Life Span	50,000 hrs
Beam angle	100 degree	Dimmable	Compatible with most dimmer down to 5%
Color Temp	5CCT	Lumen Package	180 lm to 1250 lm
CRI	90	Warranty	5 Years
Input Voltage	120V	Ambient Operation Temperature	-4°C (-4°F) ~45°C (114°F)
Installation	Surface Mount		

LiRON LiGHTING

UCB Series
Undercabinet Bar Light

Ordering Guide   Example:UCB-11IN6W5CCT

Fixture Type	Size	Wattage	Color Temp.
UCB	11IN=11Inch 14IN=14Inch 22IN=22Inch	6W=6 Watt 8W=8 Watt 10W=10 Watt	5CCT=CCT Selectable 27K/30K/35K/40K/50K

Optional Accessories

Power Line

PCABLE

= Power line

Fixture Type:

Project Name

Location:

Date:

Product Information

WATTAGE	LUMEN	EFFICACY
11" 6W	350lm	58lm/W
14" 8W	570lm	71lm/W
22" 10W	750lm	75lm/W
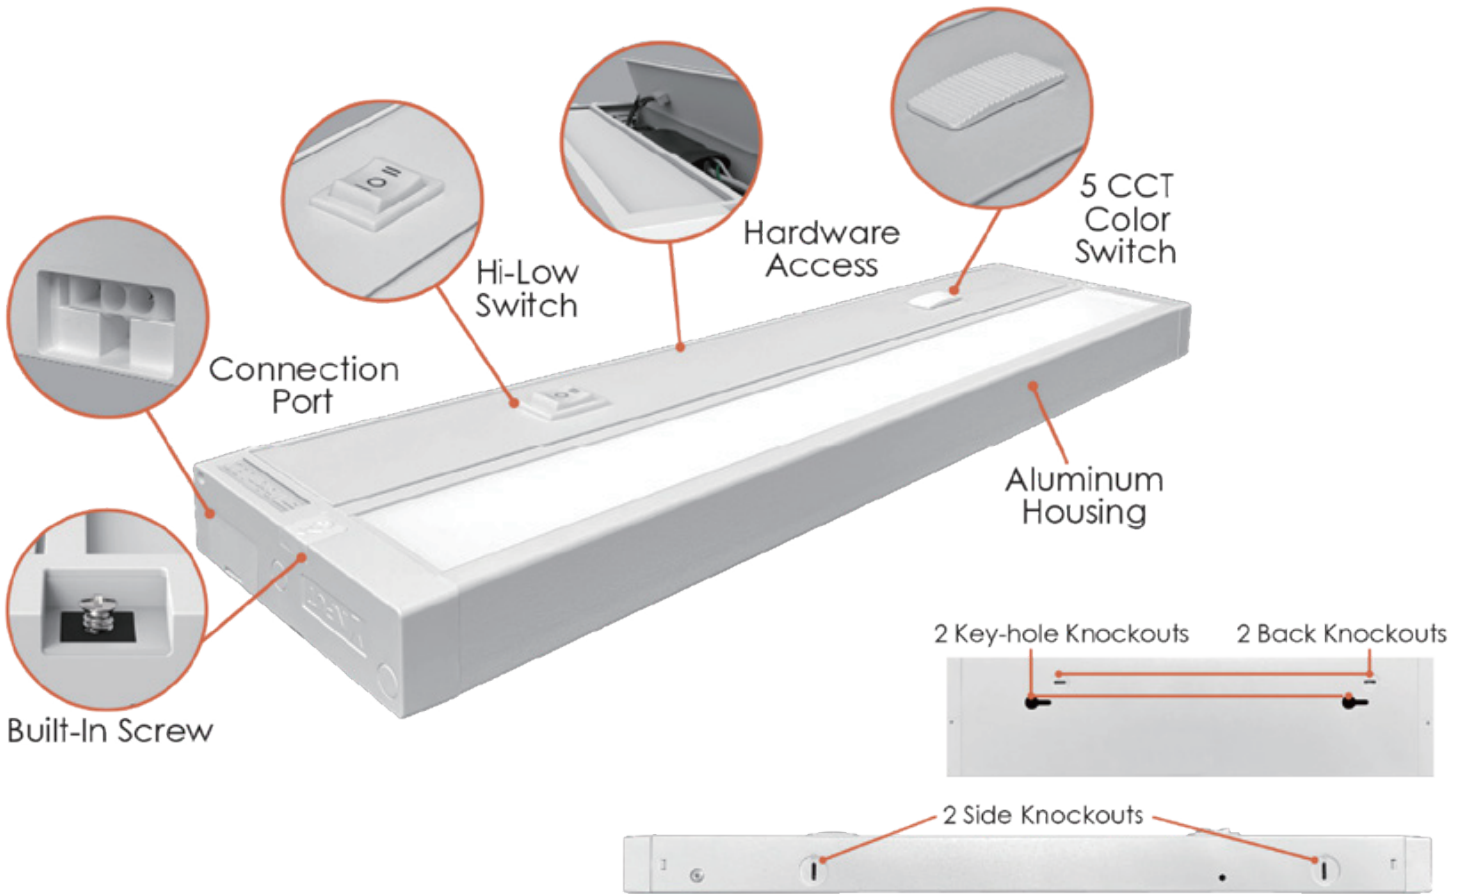
Connection Port

Hi-Low Switch

Hardware Access

5 CCT Color Switch

Aluminum Housing

Built-In Screw

2 Key-hole Knockouts   2 Back Knockouts

2 Side Knockouts

Included Accessories

Joiner:

Joiner

Connector:

- 3/8" connector

Screws & Anchors:

UCB Series

Undercabinet Bar Light

Optional Accessories

Connector:

- Power line