

WKL2 Series

LED Loading Dock gooseneck Light

Fixture Type:

Project Name

Location:

Date:

Features

- IP65 LED lamp head uses rugged cast aluminum housing
- Using CREE LEDs, high lumens 2800 to 3000 lm
- High light transmittance 20 degree PC lens
- 27" durable flexible gooseneck
- Supplied with 6ft power cord
- LED driver with full potted thermal glues
- 5 Years warranty



Product Performance Standard

Size	L 7.24" x W2.83" x H6.42"	Power Factor	90%
Weight	8 lb	Lift Span	50,000 Hrs
Beam Angle	30 Degree	Dimmable	0-10V Dimmable
Color Temp	30K/40K/50K/57K/65K	Efficacy	Up to 140 lm/W
CRI	80	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 50C° (113°F)

Ordering Guide

Example: WKL2-40W40K-B1

Fixture Type

Wattage

Color Temp.

Voltage

WKL2

20W
= 20Watts

30K
=3000K
40K
=4000K
50K
=5000K
57K
=5700K
60K
=6000K

Blank
=120-277V



WKL2 Series

LED Loading Dock gooseneck Light

Fixture Type:

Project Name

Location:



Date:

Product Information

		3000K		4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	
20W	2960lm	148lm/W	2960lm	148lm/W	3000lm	150lm/W	

Dimensions

Unit: inch/mm

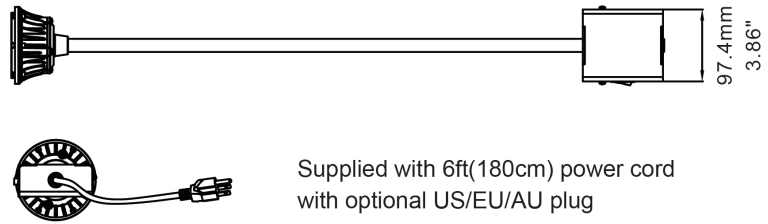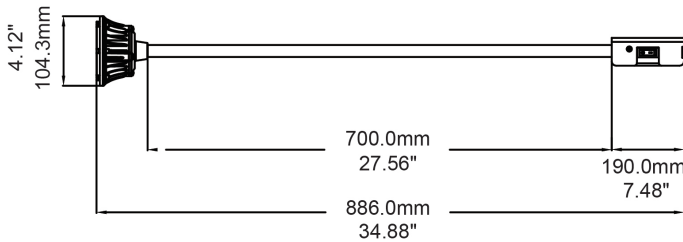

WKL2 Series

LED Loading Dock gooseneck Light

Fixture Type:

Project Name

Location:

Date:

