

WKL3 Series

LED Temporary Light

Fixture Type:

Project Name

Location:

Date:

Features

- Portable hook, easy to carry and quick install.
- Heavy duty and durable construction, steel stainless lamp cage.
- Ventilation air-flow heat sink design for better heat dissipation.
- Integrated 120V USA 10FT cord and plug, linkable up to 750W MAX.
- High quality LED driver to ensure stable working situation.
- Waterproof rubber design.
- Optional mounting bracket available.
- Built in 6kv(100W) or10kv(150W) surge protector.




Product Performance Standard

Size	W6.5" x H11.3"	Power Factor	90%
Weight	8 lb	Lift Span	50,000 Hrs
Beam Angle	360 Degree	Dimmable	0-10V Dimmable
Color Temp	5000K	Efficacy	Up to 120 lm/W
CRI	80	Warranty	5 Years
Input Voltage	120-277V	Ambient Operation Temperature	-40C° (-40°F) ~ 50C° (113°F)

Ordering Guide

Example: WKL3-100W50K-FL-BRACKET-WKL3

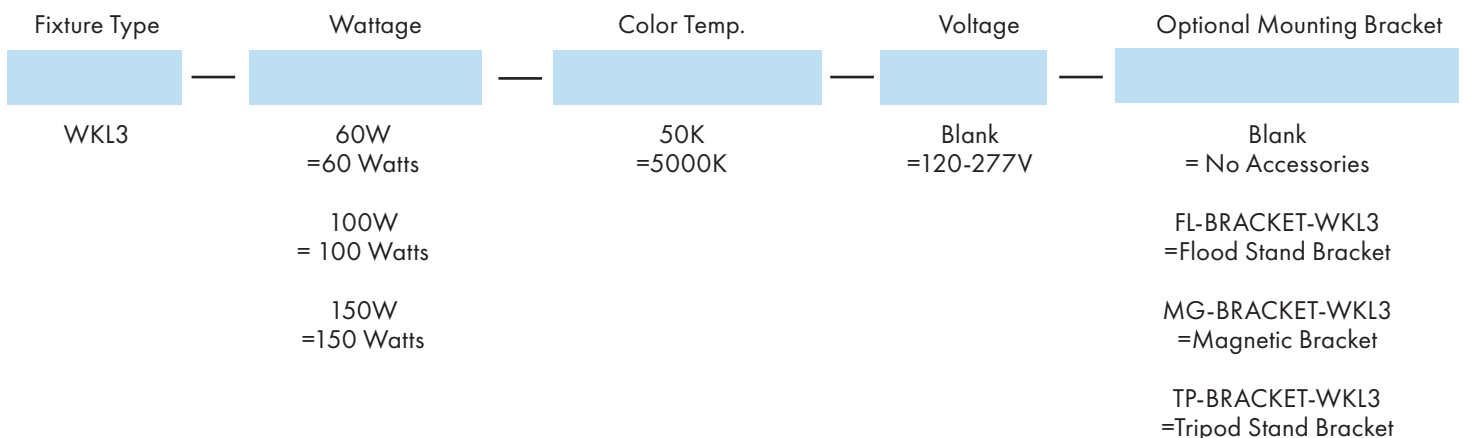

WKL3 Series

LED Temporary Light

Fixture Type:

Project Name

Location:


Date:

Product Information

5000K

WATTAGE	LUMEN	EFFICACY
60W	7200lm	120lm/W
100W	12000lm	120lm/W
150W	18000lm	120lm/W

Dimensions

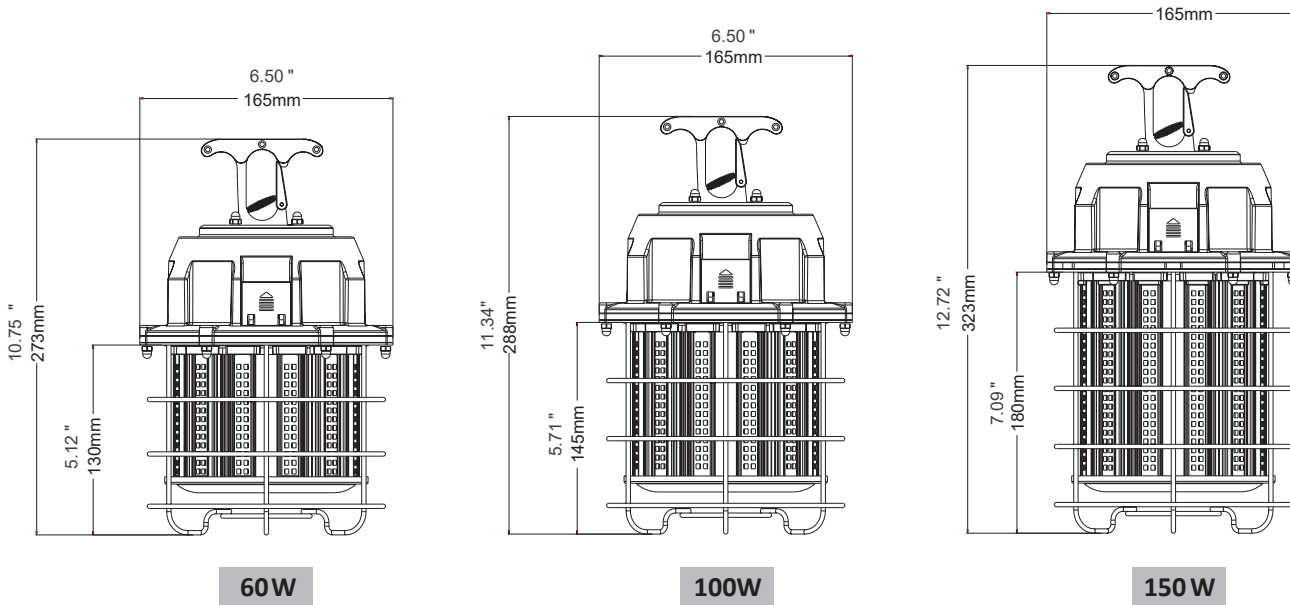

WKL3 Series

LED Temporary Light

Fixture Type:

Project Name

Location:

Date:

Optional Accessories



Flood stand bracket



Magnetic Bracket



Tripod Bracket

