WKL3 Series
LED Temporary Light

Features

-Portable hook, easy to carry and quick install.

-Heavy duty and durable construction, steel stainless lamp cage.

-Ventilation air-flow heat sink design for better heat dissipation.

-Integrated 120V USA 10FT cord and plug, linkable up to 750W MAX.

-High quality LED driver to ensure stable working situation.

-Waterproof rubber design.

-Optional mounting bracket available.

-Built in 6kv(100W) or10kv(150W) surge protector.
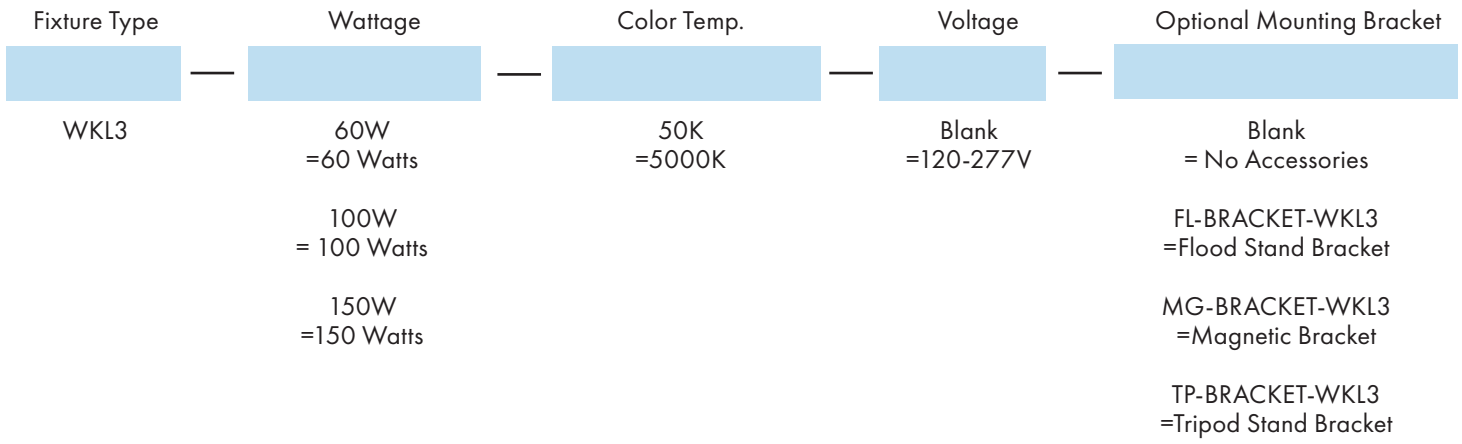
150W

60W

100W

Product Performance Standard

Size	W6.5" x H11.3"	**Power Factor**	90%
Weight	8 lb	**Lift Span**	50,000 Hrs
Beam Angle	360 Degree	**Dimmable**	0-10V Dimmable
Color Temp	5000K	**Efficacy**	Up to 120 lm/W
CRI	80	**Warranty**	5 Years
Input Voltage	120-277V	**Ambient Operation Temperature**	-40C° (-40°F) ~ 50C° (113°F)

Ordering Guide   Example: WKL3-100W50K-FL-BRACKET-WKL3

Fixture Type	Wattage	Color Temp.	Voltage	Optional Mounting Bracket
	—	—	—	—
WKL3	60W =60 Watts	50K =5000K	Blank =120-277V	Blank = No Accessories
	100W = 100 Watts			FL-BRACKET-WKL3 =Flood Stand Bracket
	150W =150 Watts			MG-BRACKET-WKL3 =Magnetic Bracket
				TP-BRACKET-WKL3 =Tripod Stand Bracket

WKL3 Series
LED Temporary Light

Product Information

5000K		
WATTAGE	**LUMEN**	**EFFICACY**
60W	7200lm	120lm/W
100W	12000lm	120lm/W
150W	18000lm	120lm/W

Dimensions
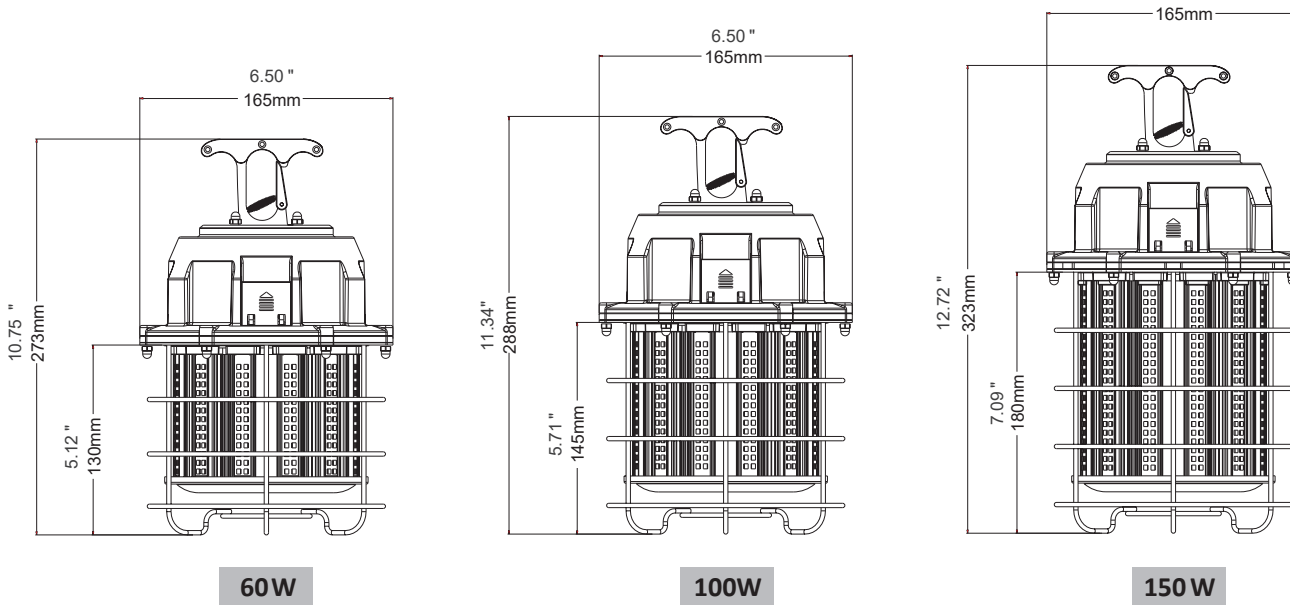
60W

100W

150W

WKL3- Rev 06-27-2024

WKL3 Series
LED Temporary Light

Optional Accessories

Flood stand bracket

Magnetic Bracket

Tripod Bracket

LED Driver

Using Rubycon capacitors
6000V surge protection
high reliability

Portable hook

Easy to carry and install
Flexible with spring

Built in socket

Linkable
Max. 10 pcs 60W
7pcs 100W
5pcs 150W

120V USA plug with cord
Cord lengh: 10ft
cord type: 18AWG

120 lm/W
Ultra-bright LED

Heavy-duty welded
lamp cage

Waterproof
rubber gasket

Ventilation air flow
heat sink