

PLB4 Series

LED 1X4 Surface Mount Back-lit Panel

Fixture Type:


Project Name

Location:



Date:

Features

- Low profile design 1x4 surface mount panel.
- 3 wattage selectable & 5 CCT adjustable.
- Back-lit platform provides smooth even illumination across the face of luminaire.
- Aluminum frame with brush nickle finish, optional black, white, oil bronze finish is available.
- Triac dimming 10% -100% dimming range, compatible with most household triac LED

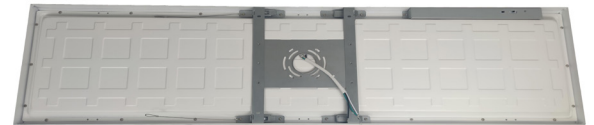

Dimensions

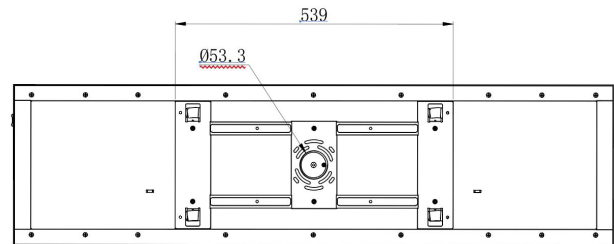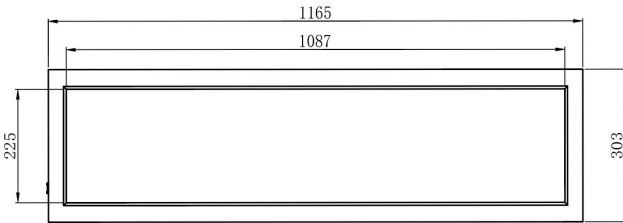

Specification

Material	Aluminum	Efficacy	Up to 100 lm/W
Lens	Polycarbonate Lens	LED Life Span	50,000 hrs
Beam angle	120 degree	Dimmable	Triac Dimming
IColor Temp	5CCT 2700K/3000K/4000K/5000K/6000K	Lumen Package	2,400 - 4,000 lumen
CRI	80	Warranty	5 Years
Input Voltage	120	Ambient Operation Temperature	-20°C (-4°F) ~50° C(122°F)
Installation	Surface Mount	Listing	ETL Listed Damp location listed



PLB4 Series

LED 1X4 Surface Mount Back-lit Panel

Fixture Type:


Project Name

Location:

Date:

Ordering Guide

Example: PLB4-1X4UW5CCT-40W-BN

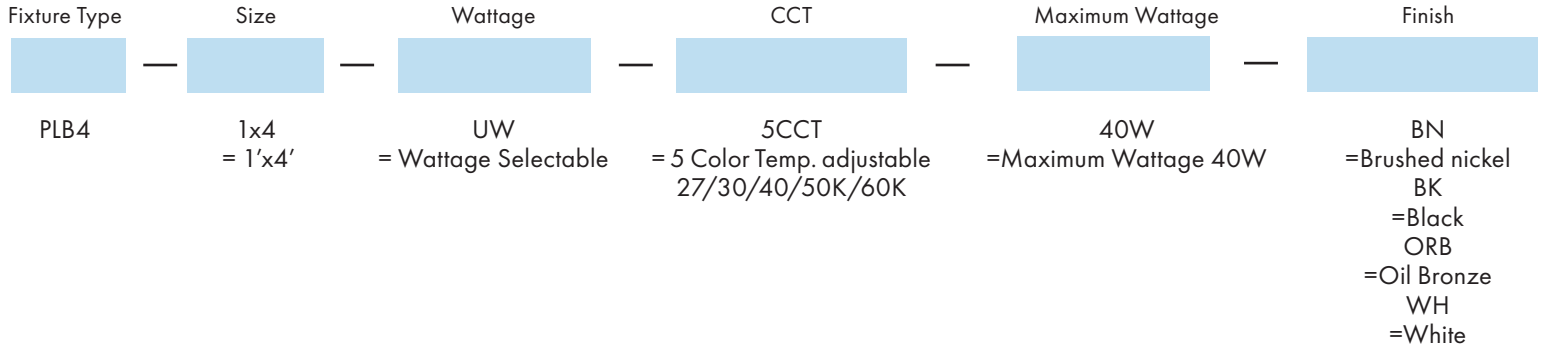

Product Information

3000K			4000K		5000K	
WATTAGE	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
40W	3800lm	95lm/W	4000lm	100lm/W	4000lm	100lm/W
30W	2850lm	95lm/W	3000lm	100lm/W	3000lm	100lm/W
24W	2280lm	95lm/W	2400lm	100lm/W	2400lm	100lm/W

