

# CSP3 Series

5CCT LED Flush Mount Wet Location

**Fixture Type:**

**Project Name**

**Location:**


**Date:**

## Features

- Ultra bright 24 watt 13 inch LED flush mount downlight .
- Wet location suitable. Designed to withstand moisture and water exposure, making it ideal for outdoor spaces, bathrooms, kitchens, and other moisture-prone areas.
- With a sleek 0.98 inch thickness, this light is not only stylish but also incredibly energy-efficient, offering a remarkable 80% more energy savings compared to traditional halogen lamps.
- Equipped with high-quality LEDs, this downlight provides brilliant lighting, make it ideal for both residential and commercial space.
- Design for easy flush mount installation, this downlight is suitable for J-box with a diameter of 2.75 inch or 3.5 inch, ensuring a hassle-free installation process.
- 5CCT color temperatures adjustable, allowing you to adjust the color temperatures according to your preference and create the perfect ambiance for any occasion.



## Dimensions

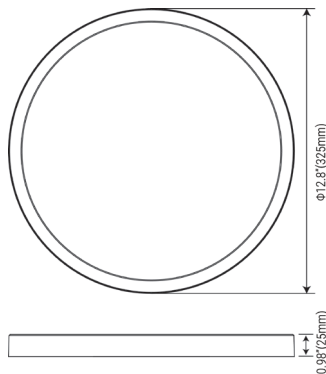

## Specification

<b>Material</b>	Aluminum	<b>Efficacy</b>	Up to 90 lm/W
<b>Lens</b>	Polycarbonate Lens	<b>LED Life Span</b>	50,000 hrs
<b>Beam angle</b>	120 degree	<b>Dimmable</b>	Triac Dimming
<b>IColor Temp</b>	5CCT 2700K/3000K/3500K/4000K/5000K	<b>Lumen Package</b>	1,976lm - 2,106lm
<b>CRI</b>	90	<b>Warranty</b>	5 Years
<b>Input Voltage</b>	120V	<b>Ambient Operation Temperature</b>	-20°C (-4°F) ~45° C(113°F)
<b>Installation</b>	Flush Mount	<b>Listing</b>	ETL Wet Location






# CSP3 Series

LED Flush Mount Wet Location Wattage Selectable and 5CCT

<b>Fixture Type:</b>
<b>Project Name</b>
<b>Location:</b>
<b>Date:</b>

## Ordering Guide

Example: CSP3-24W13IN5CCT

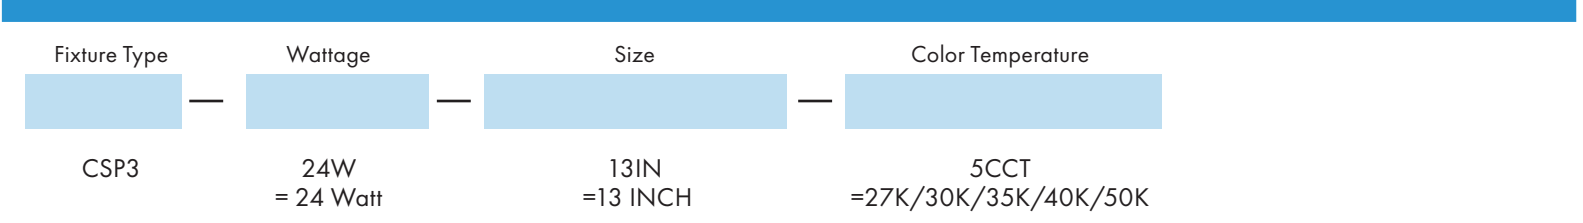

# CSP3 Series

LED Flush Mount Wet Location Wattage Selectable and 5CCT

### Fixture Type:

Project Name

Location:

Date:

## Product Information

WATTAGE	2700K			3000K		3500K		4000K		5000K	
	LUMEN	EFFICACY		LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY	LUMEN	EFFICACY
24W	1976 lm	82 lm/W		2013 lm	83lm/W	2116 lm	88lm/W	2161 lm	90lm/W	2106 lm	87lm/W

### Die-cast trim

Precision casting, excellent heat dissipation, high corrosion; lamp thickness only 0.98".



### Color temperature optional


2700K-5000K



### Mounting bracket

With multiple apertures, can be installed into any 2.75 or 3.5inch junction box.

3.5" Junction Box installation hole → 2.75" Junction Box installation hole

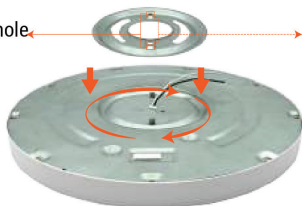

### Installation Bracket

Rotating installation bracket, easy to install.

